



**3150 BARRY DR**  
PORTLAND, TN

AVAILABLE FOR SALE  
**ADVANCED TECHNOLOGY FACILITY**

338,000 SF  
26.32 Acres

# PROPERTY DETAILS

**SIZE:** Approximately 338,000 square foot footprint

**GROUND:** Approximately 26.32 acres

**NUMBER OF BUILDINGS:** One modern single story industrial facility

**DIMENSIONS:**

Original: Approximately 410' x 450' plus 65' x 90' shipping dock extension

Expansion: Approximately 275' x 530'

**CONDITION OF PROPERTY:** Outstanding

**DATE OF CONSTRUCTION:**

Original: 1993

Expansion: 2008

Major renovations completed in 2021-22

**CONSTRUCTION:**

**Floor:**

Original: Stone hard epoxy sealer on 6" non-reinforced slab on grade

Expansion: 8" reinforced slab on grade

**Walls:**

Original: Metal sandwich panel

Expansion: Split face block with metal sandwich panel above

All metal side walls in the southern section of the building were replaced in 2021

**Columns:**

Original: Round steel poles

Expansion: Steel H beams

**Roof:**

Standing seam metal – the southern section was completely replaced in 2021, including new purlins

**COLUMN SPACING:**

Original: Primarily 30' x 65'4"

Expansion: Primarily 43' x 40'

**CEILING HEIGHT:**

Original: 24' – 29' clear

Expansion: 36' – 40' clear from floor to bar joists; 11' under the dropped ceiling in the production area; 6' interstitial mechanical plenum above the dropped ceiling and average 20' clear height above for mechanical equipment housing.

**LIGHTING:**

LED, most with sensors and some are programmable. Central inverter battery powered back up storage system will operate the emergency lights throughout the facility for 90minutes.

High wall mounted windows on the east wall of the warehouse.

Motion sensor lighting in all office areas.

Warehouse sensors are controlled at each individual fixture.

All production lighting is controlled by both switches or computer based programming that is overridden by motion sensors.

**WATER:**

Supplied by City of Portland

4" main; 2" line

Two back flow preventers

**SEWER:**

Supplied by City of Portland

6" main; 4" line

**GAS:**

Supplied by City of Portland

2" high-pressure main; 3" line

## PROPERTY DETAILS

**POWER:** Supplied by Cumberland Electric Membership Co-op.

Four 1500 kVa pad mounted transformers.

Four 3,000AMP480/277 volt, three phase, four wire switch gears are connected and two more are installed but not yet energized. Ample space in the two separate mechanical rooms for additional equipment installation.

All equipment in each production cell is fed by a separate, dedicated electrical panel located in the mechanical mezzanine so repairs can be made without impacting the remaining equipment.

**AIR CONDITIONING:** The material management office on the east wall of the warehouse is heated and cooled by a four-ton electric package unit.

The office and production areas are cooled by three exterior pad mounted 300-ton Trane Ascend chillers which feed 74 fan cooling units for the nonproduction area and 15 HEPA filtered units with UV lighting for the production area. Connections in place for a 4th 300-ton chiller unit.

There are six DOAS positive pressure units fed by chilled and hot water designed to maintain 60% humidity. Two serve the office and warehouse area and four with HEPA filters serve the production area.

10 Erip ceiling mounted circulation fans.

The 108,000 square-foot clean room is fed by 10 cooling units and five combination heating and cooling units, all of which are located in the mechanical mezzanine. The mechanical mezzanine is cooled by four separate AC units and two intake and two exhaust fans.

**HEAT:** Four low pressure gas fired Lochinvar water heaters. Supplemental gas units at loading docks. Glycol system provides corrosion resistance and temperature regulation for hot and cold-water systems.

**SPRINKLER:** ESFR throughout. One 100 HP electric 1,500 GPM @ 75 PSI main pump with 2 HP electric 15 GPM booster pump draws water from a 200,000-gallon elevated city owned tank on the adjacent property.

**COMPRESSED AIR:** Five 150 hp water cooled Ingersoll-Rand oilless screw compressors and one 60 hp Ingersoll-Rand oilless screw. Four Ingersoll-Rand dryers. Multiple storage tanks. Four replacement filters for the dryers.

**OFFICE:** Approximately 69,000 square feet of office area including furnished private offices and cubicles (many with adjustable height desks), two primary production break areas, several office kitchen and breakroom areas, fully furnished conference and training rooms, two primary and one secondary gowning areas and two locker rooms.

**TRUCK LOADING:** Twelve 8' x 10' electric rollup dock high doors with locks, levelers (one without), seals and lights.

One 15' x 15' electric ground-level drive-in door and one 12' x 30' electric ground-level drive-in door.

**PARKING:** Paved and marked parking for 705 standard vehicles plus 16 handicap spaces and 10 motorcycle spaces

**FORMER USE:** Medical product manufacturing and distribution

### RESTROOMS:

#### Office:

Men: Three toilets, two urinals, three sinks

Women: Five toilets, three sinks

#### Original Plant:

Men: Seven toilets, two urinals, nine sinks

Women: Nine toilets, nine sinks

Unisex: Shipping/receiving area) –Two toilets, two sinks

#### Expansion:

Men: Seven toilets, two urinals, nine sinks

Women: Nine toilets, nine sinks

Unisex: Two toilets, two sinks

Showers and two locker rooms

**ZONING:** I-A, Restricted Industrial (Town of Orinda)

**TAXES:** To be confirmed

## PROPERTY DETAILS

**TRANSPORTATION:** The property is adjacent to the east side of I-65, less than one mile north of exit 117. Six lane widening is now underway from Nashville to the Kentucky state line. The Nashville airport is approximately 40 miles south of the property. The Robertson County Airport is a 5,500-foot runway with an ILS approach located approximately 20 miles southwest of the property in Springfield.

**MISCELLANEOUS:** Approximately 104,000 square foot validated ISO 8 production area, capable of ISO 5 conditions. Approx. 20 air turns per hour.

194,000 square foot mechanical mezzanine above production area and main office/training room area

One MDF and four IDF server rooms


Two nitrogen generators preserve the life of sprinkler piping that was installed in the 2021 renovations.

6,603 pallet positions of 144", 6,250-pound beam capacity storage rack with 20' uprights.


Programmable access card system controls access to different sections of the building and can be controlled by time and area access.

Lawn sprinkler system including a drip system for the flowerbeds.


Facility is equipped with a Building Management System capable of setting schedules and controlling temperatures throughout the facility local and remote. The system monitors multiple pieces of equipment (air compressors, central cooling equipment, boilers, and other critical and non-critical equipment) and sends email alarm alerts to notify in case of equipment failure.

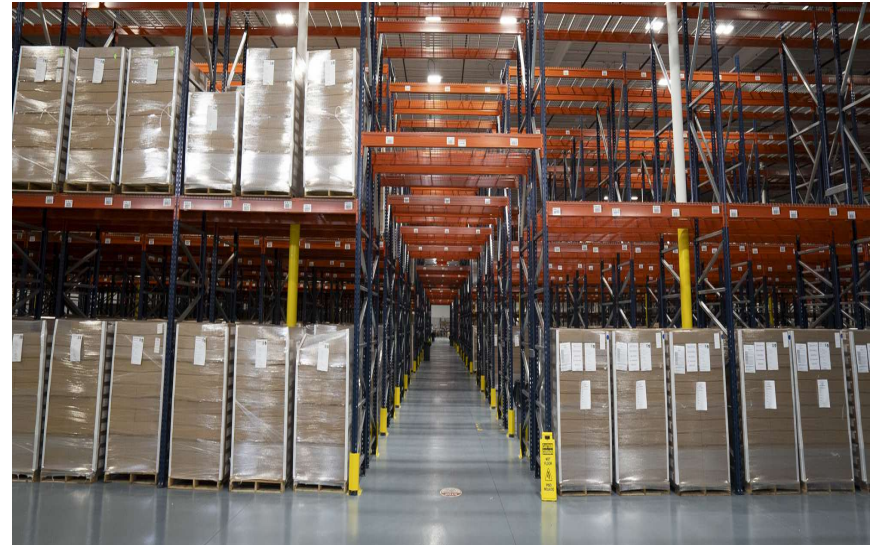

# FLOOR PLAN

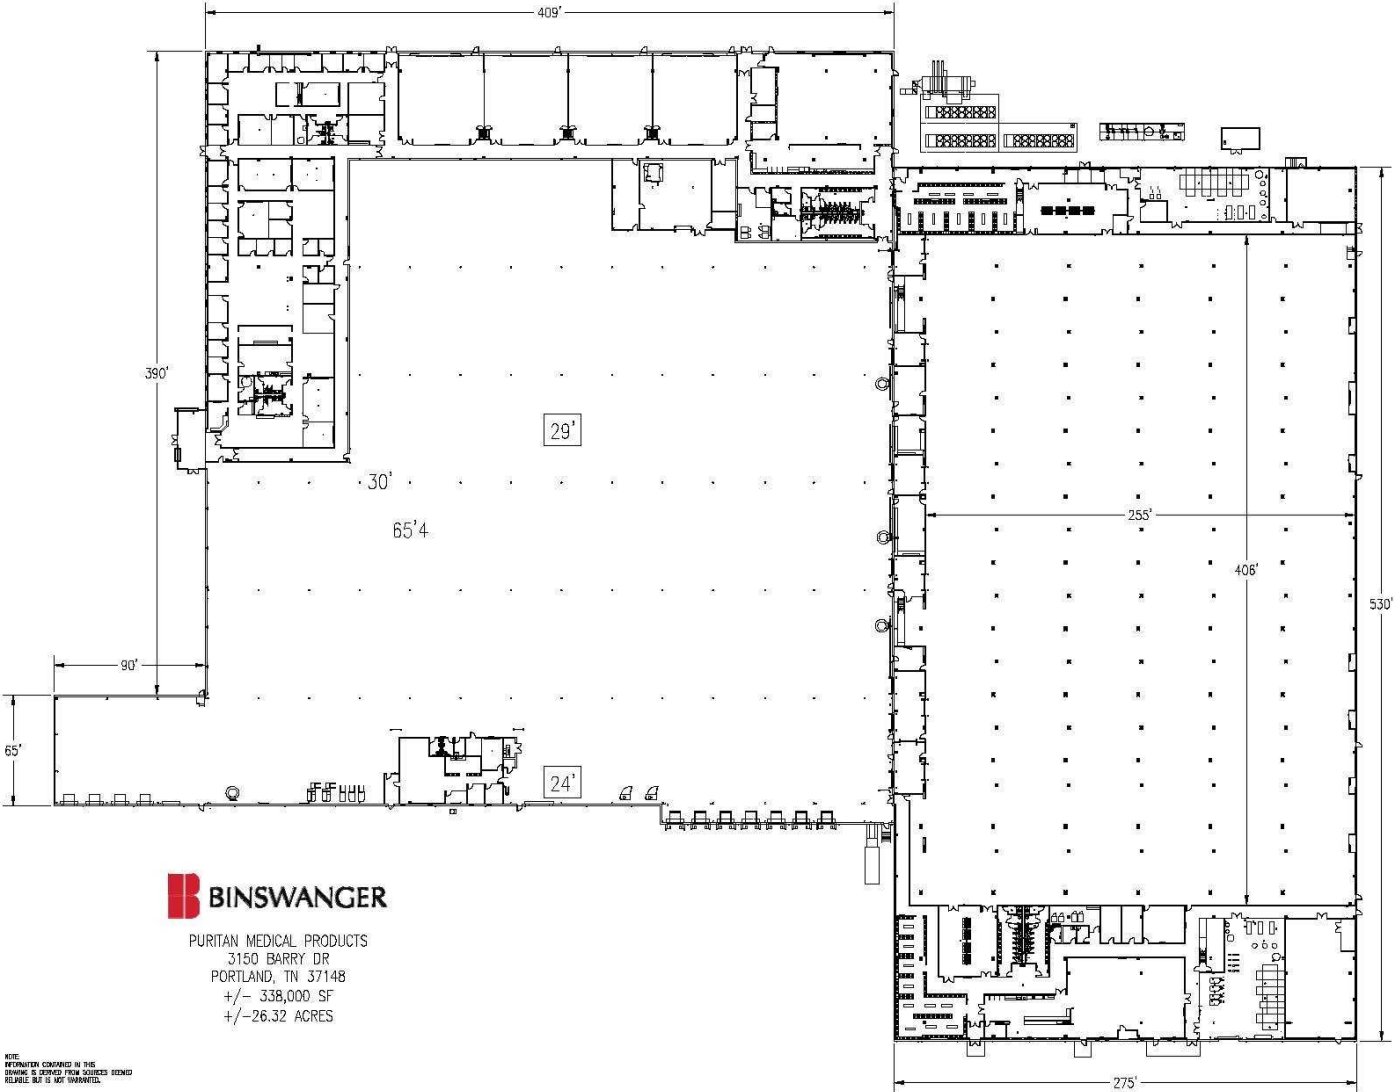


# FLOOR PLAN

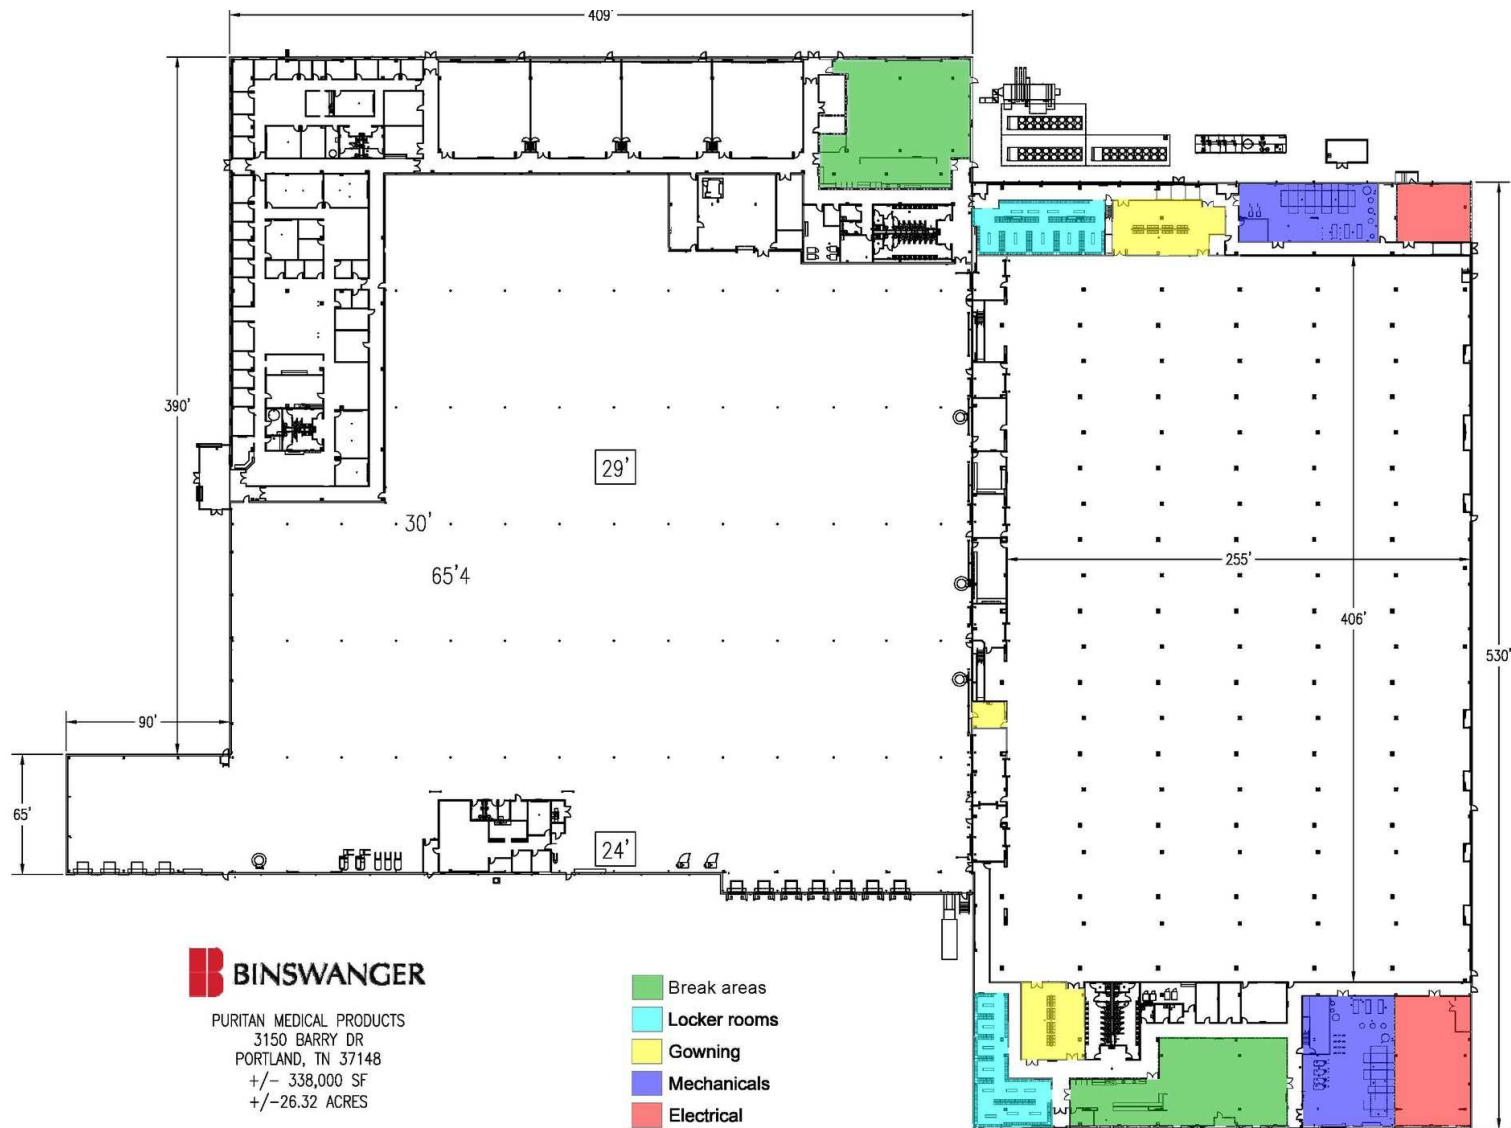


PURITAN MEDICAL PRODUCTS  
 3150 BARRY DR  
 PORTLAND, TN 37148  
 +/- 338,000 SF  
 +/- 26.32 ACRES

# 3D MODEL – MAIN LEVEL



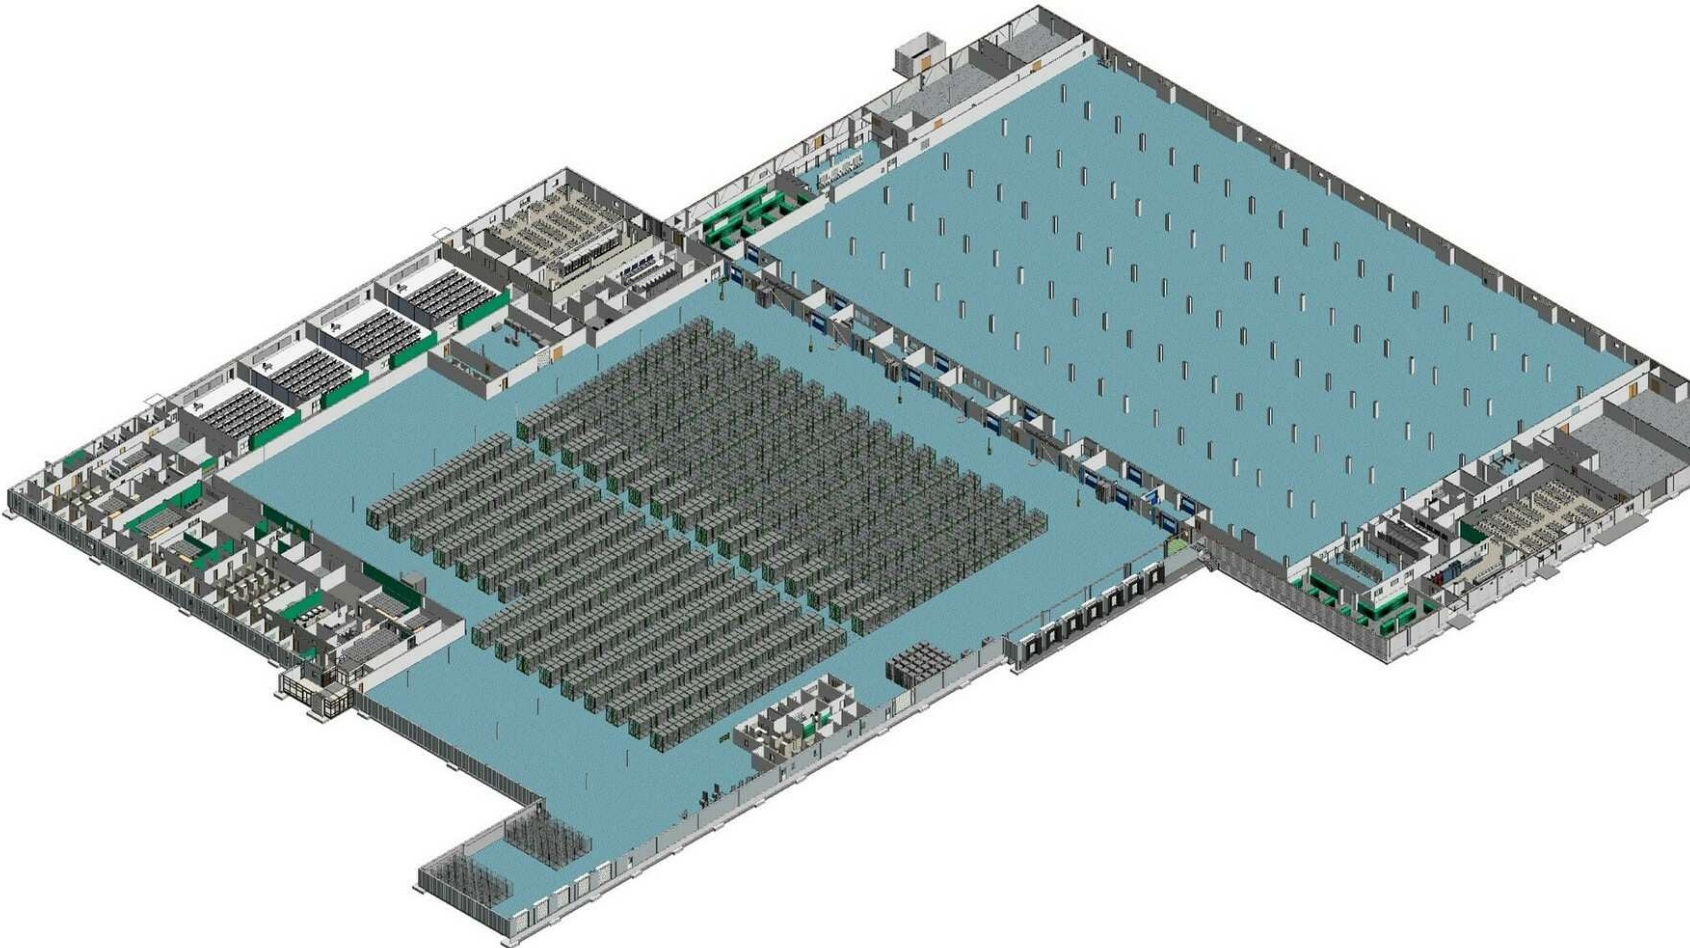


# 3D MODEL – MEZZANINE LEVEL



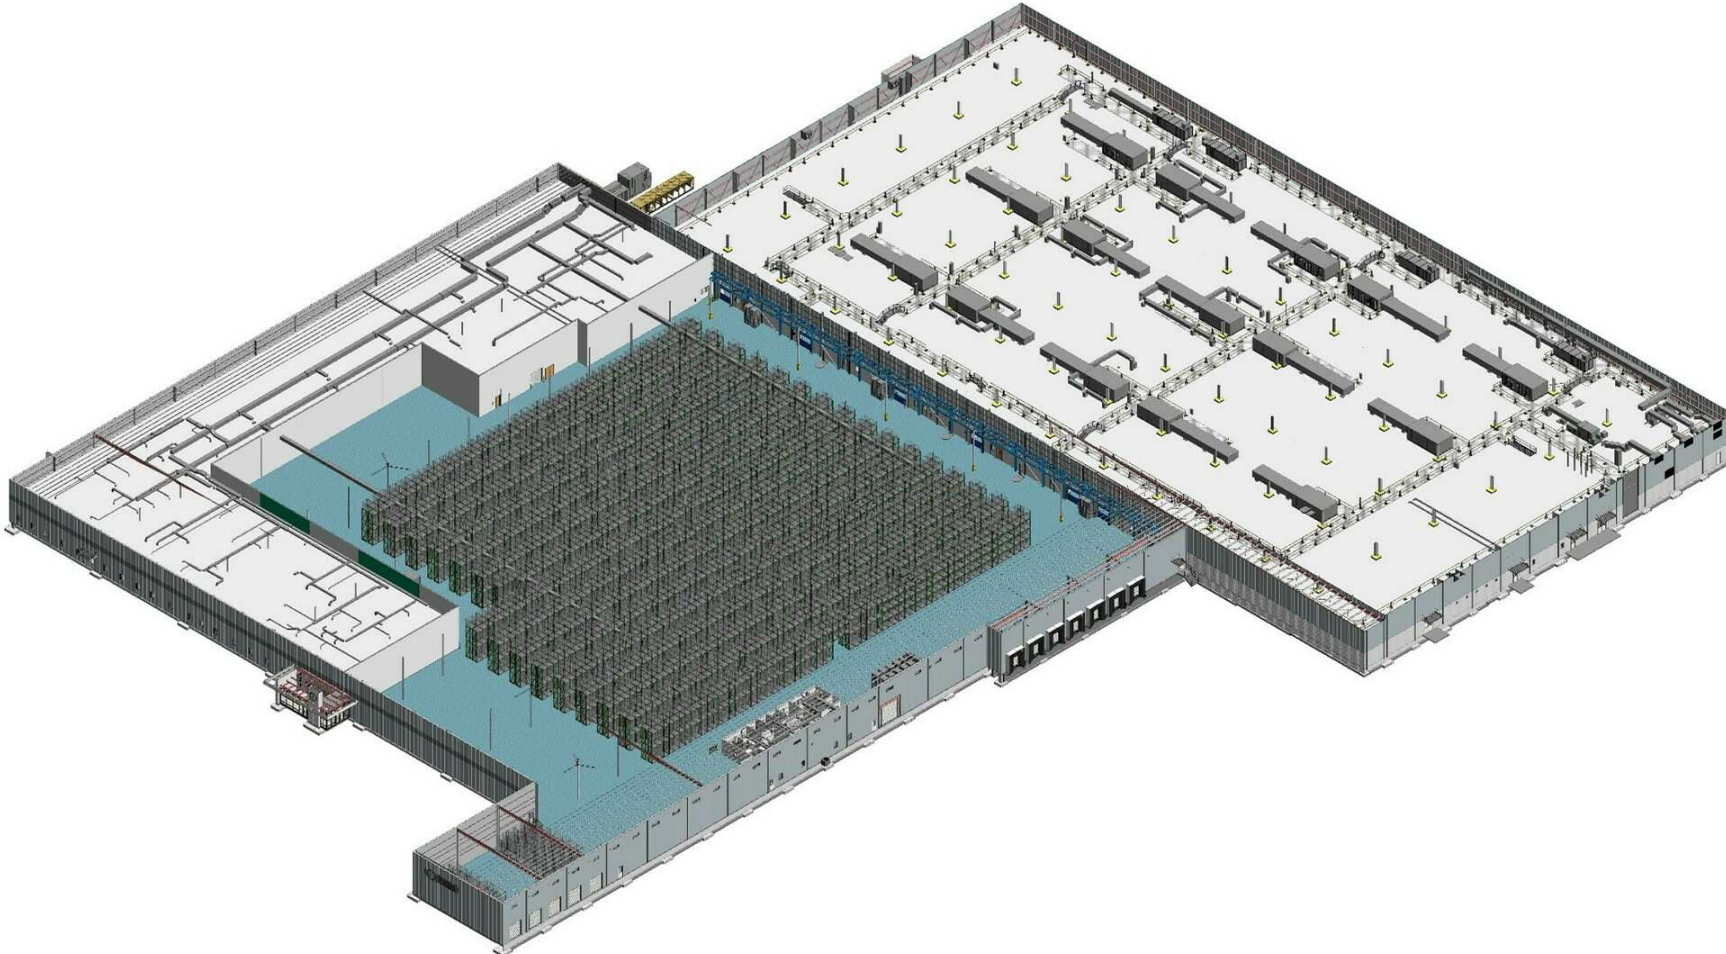




# ADDITIONAL PHOTOS

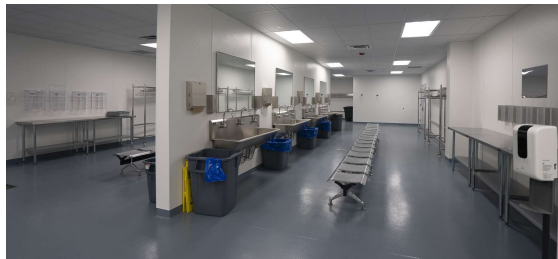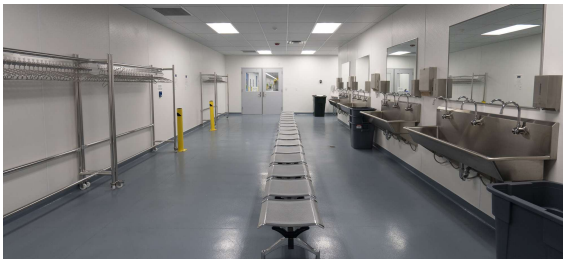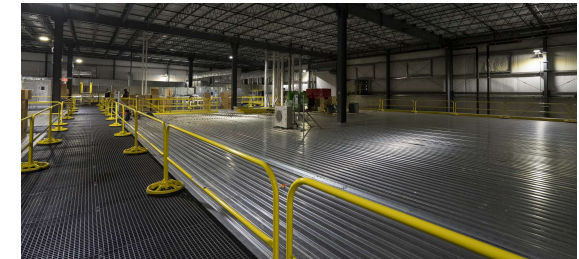


# ADDITIONAL PHOTOS

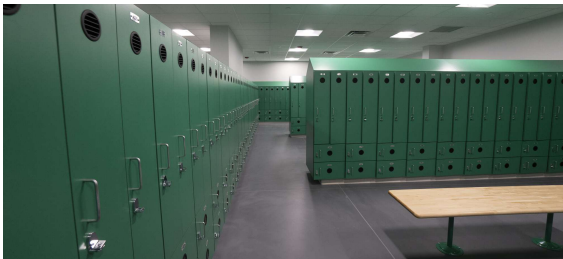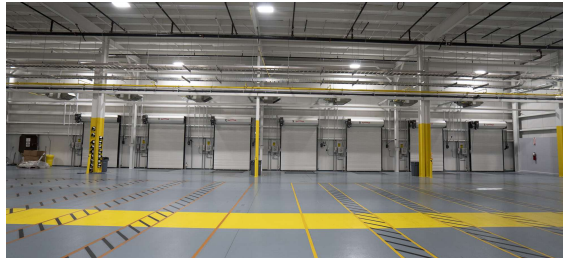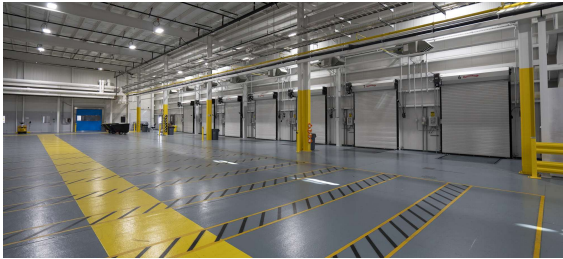

# AERIAL IMAGE



# AREA MAP

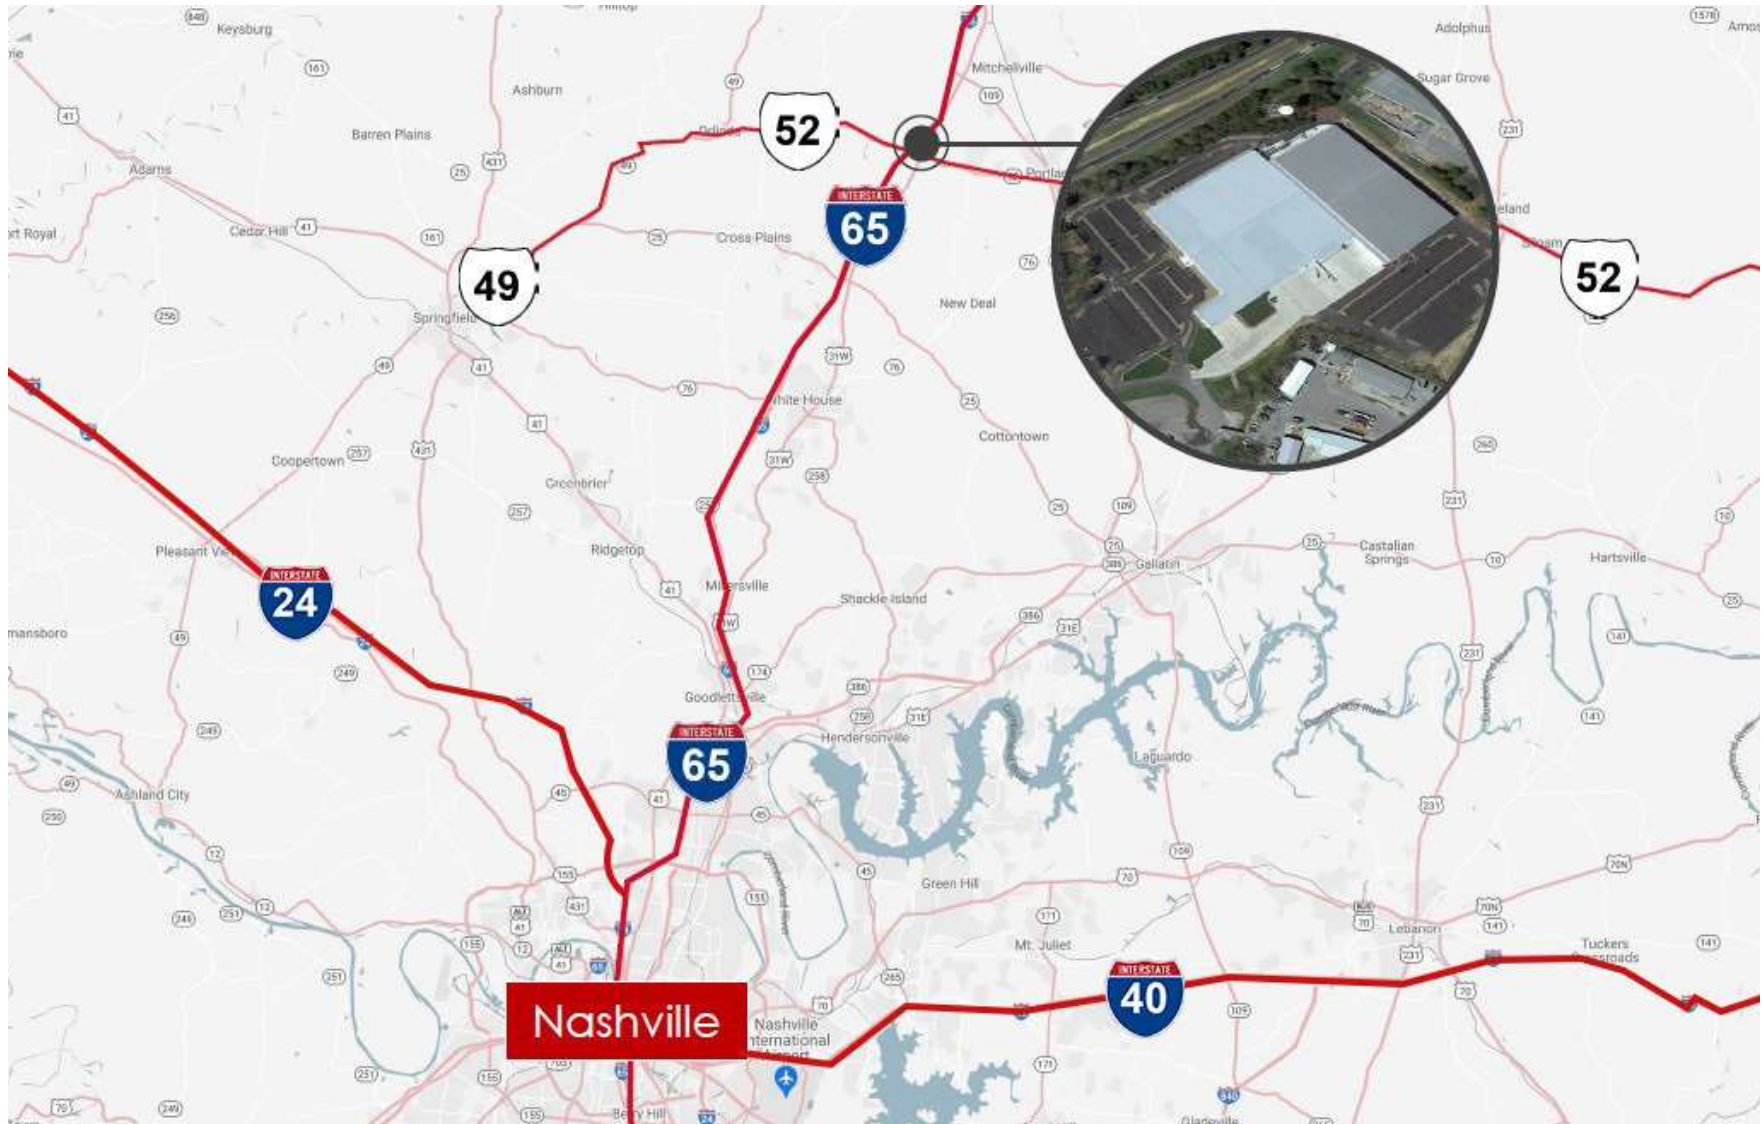

# CONTACT



**Larry Spinelli**  
Senior Vice President, National Group  
**615.500.4880**  
lspinelli@binswanger.com



**Doug Faris**  
Senior Vice President  
**704.972.2040**  
dfaris@binswanger.com



**John Quinnelly**  
Vice President  
**251.550.1001**  
jqinnelly@binswanger.com



Three Logan Square  
1717 Arch Street, Suite 5100  
Philadelphia, PA 19103  
Phone: 215.448.6000  
binswanger.com

The information contained herein is from sources deemed reliable, but no warranty or representation is made as to the accuracy thereof and no liability may be imposed.