

interior walls 2x4 wood stud, unless noted otherwise

**RECAPITULATION**

2x3 wood stud wall, 16" c

⑥ Nail wood stud wall, 16" c

## Key Notes

Filed by the Office of the Clerk of the Court  
for the Court of Appeals for the Fifth Circuit  
on 03/11/2015 at 10:00 AM  
Case No. 14-10000

$\nabla$  is a linear operator on  $\mathcal{H}$  such that  $\nabla^2 = 0$ .

Adjust dimensions to accommodate

and may need to be cut down

ON WALL

Object is to have some "bite" for customer to chew on window brand.

© 2000 Blackwell Science Ltd *Journal of Internal Medicine* 247: 101–107

Cosets are 24" clear inside, unless dimensioned otherwise.

**Table 1. Continued**

2. Cabins and fixtures not supplied.

3. Add ice door ways when ice or linens run through.

## NOTES

1. Examine walls at 2.50 m and up to 6.10 m above floor level for vapor barrier conforming to state or local code.

2 - Interior walls 2x4 wood stud @ 16" oc, unless noted

3. Do not use a calculator for number lines. Do not use a ruler.

exterior rated roof sheathing 15/4 roofing felt, ice & water shield at eaves and valleys, aluminum drip edge and

4. Provide a model and/or cell-by-cell illustration. Provide

soil and ridge vents where required for insulation strategy.  
(Verify with code officer - do not use spray foam or do so -

5 - Provide simple deductions when shown where required

by codes and where required by local authorities.


7. Compliance with code requirements for room size and

distances, pathway widths, room sizes, etc.) assume 5:10 drywall on walls.

IBC 2009.


type pci idocvcc is

type pci idobzvov is i type vb

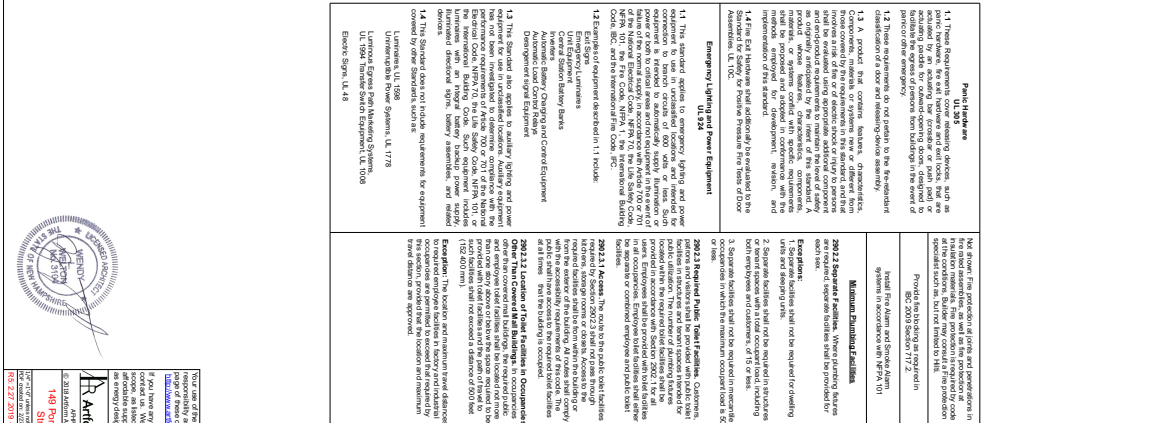

**NOTE: Plans must be printed in color**



 <b>Artform Home Plans</b> AR® Design # 9.26.10.0 2018 Interior Architecture    603.431.9593 <b>1469 Portsmouth Avenue</b> <b>Stratham, NH</b>	1
---	---