


RESTROOM ELEVATIONS KEY NOTES

- 1 CERAMIC TILE FLOORING. PROVIDE SCHLUTER TRANSITION STRIP AT DOORWAY.
- 2 CERAMIC TILE COVE BASE, OR WALL TILE WITH SCHLUTER RADIUS COVED TRIM AT FLOOR TO WALL TRANSITION.
- 3 CERAMIC TILE WALLS, OVER GEMENTICUS BACKERBOARD. PROVIDE SCHLUTER TRIM AT TOP OF MAINCOT TILE.
- 4 PAINTED GYPSUM BOARD WALL.
- 5 PAINTED GYPSUMBOARD CEILING.
- 6 DOOR AS SPECIFIED.
- 7 ADA COMPLIANT WHITE VITREOUS CHINA WALLMOUNT SINK.
- 8 ADA COMPLIANT WHITE VITREOUS CHINA UNDERMOUNT LAVATORY.
- 9 ADA COMPLIANT WHITE VITREOUS CHINA TANK TYPE TOILET FIXTURE.
- 10 ADA COMPLIANT WHITE VITREOUS CHINA FLUSH VALVE URINAL.
- 11 INSULATE ALL EXPOSED PIPES.
- 12 24" W. LIGHT BARS AS SCHEDULED.
- 13 SURFACE MOUNTED CEILING DRUM LIGHT.
- 14 INSTALL MIRROR PRIOR TO CERAMIC TILE.
- 15 ADA COMPLIANT SIGNAGE.
- 16 SOLID SURFACE COUNTER / 5" APRON, / 4" BACK AND SIDE SPLASHES.
- 17 EXISTING CEILING GRID AND ACOUSTICAL CEILING TILES.


RR SINK SIDE ELEV'N

3/8"=1'-0" 13

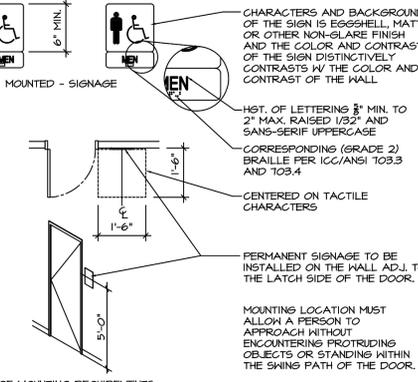


RESTROOM/EXIT SIGNAGE

3/4"=1'-0" -

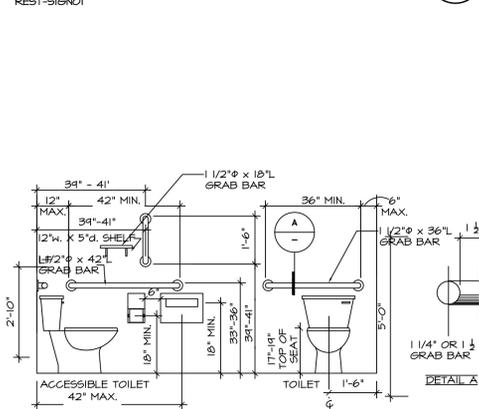


RR MOUNTING HTs

3/8"=1'-0" -

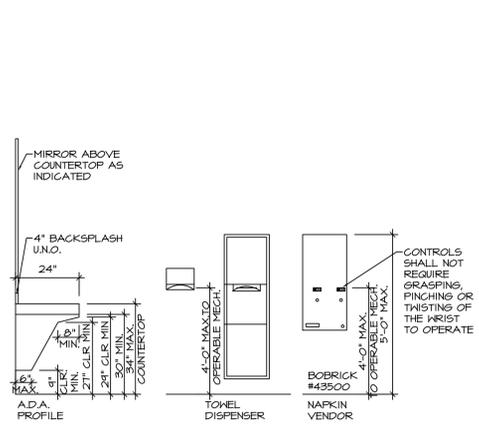


RR #15- ENLARG'D

3/8"=1'-0" 9

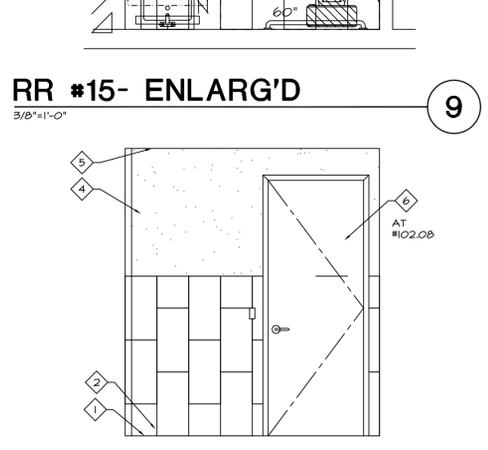


RR #8 - ENLARG'D

3/8"=1'-0" 10

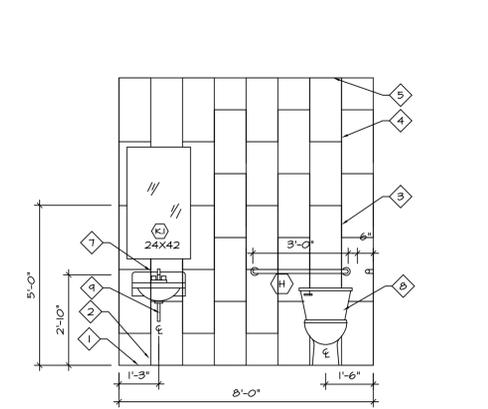


RR HEAD WALL

3/8"=1'-0" 11

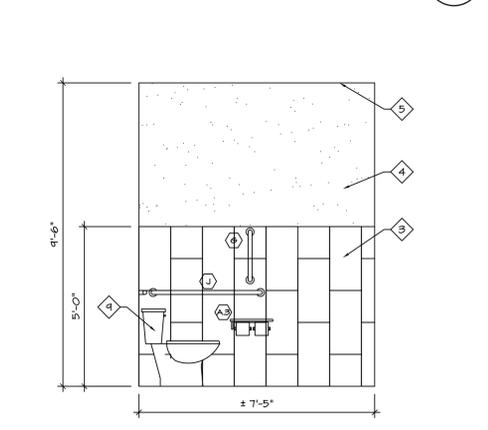


VITALS #102.03

3/8"=1'-0" 5

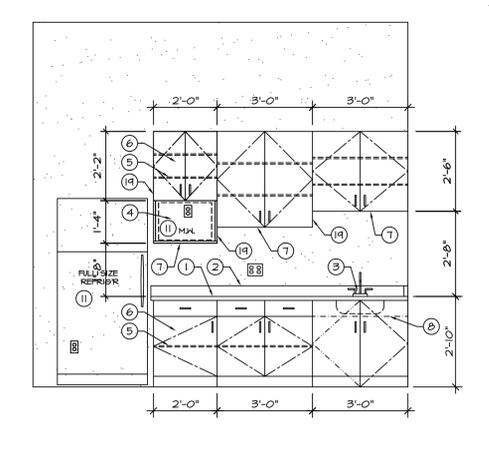


BREAK #102.13

3/8"=1'-0" 6

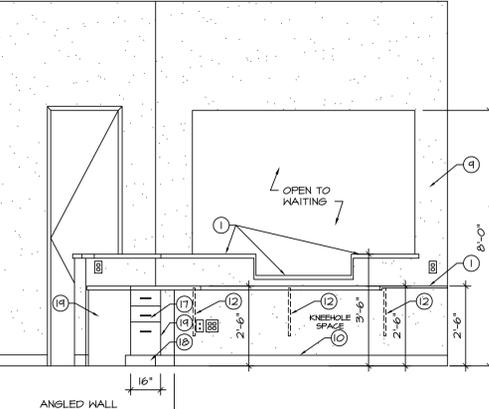

FRONT OFC #102.02

3/8"=1'-0" 7

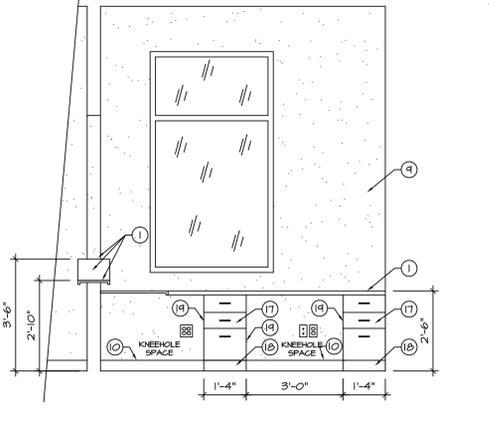


FRONT OFC #10

3/8"=1'-0" 8




INT'R PART'N THRU GRID

1/2"=1'-0" PART-INTOT 1

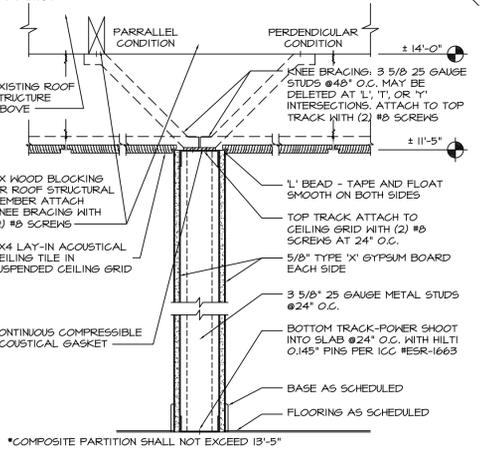


TYP. INTERIOR PARTITION

1/2"=1'-0" PART-INTOT 2

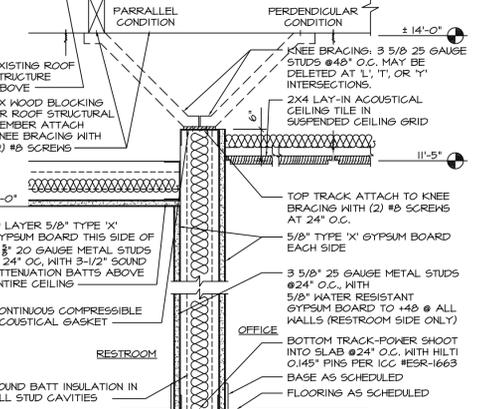

RESTROOM PARTITION

1/2"=1'-0" PART-RRD1 3

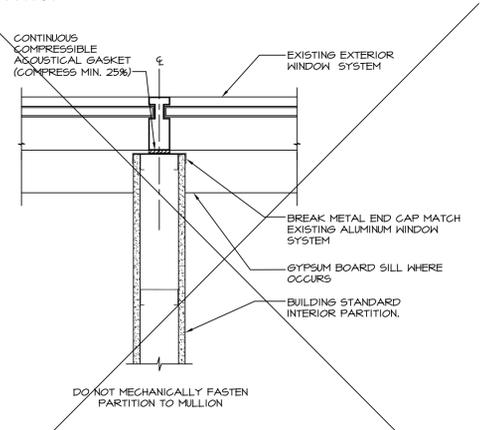

PARTITION AT MULLION

1/2"=1'-0" PART-MUL05 4



RESTROOM ACCESSORIES (NOT ALL USED - THIS PROJECT)


- A SURFACE MOUNTED SHELF WITH DUAL TOILET TISSUE DISPENSER, GAMCO #SPH-2, (STAINLESS STEEL SATIN FINISH), 16" W. X 4" H. X 5" D.
- B SURFACE MOUNTED C-FOLD PAPER TOWEL DISPENSER, GAMCO MODEL#TD-2, (STAINLESS STEEL, SATIN FINISH).
- C RECESSED COMBINATION MINI-PAPER TOWEL DISPENSER & WASTE RECEPTACLE, GAMCO #TH-3, 350/475 TOWELS; 2 gal WASTE; (STAINLESS STEEL, SATIN FINISH), 14" W. X 28" H. X 4" D.
- E BASIN-MOUNTED SOAP DISPENSER, GAMCO # 6-64 LB, (STAINLESS STEEL, SATIN FINISH), 32 oz..
- F 18" W (VERTICAL) STAINLESS STEEL GRAB BAR, CONCEALED FLANGE, GAMCO #150C-1B; (PEENED, NON-SLIP GRIPPING SURFACE).
- G 36" W STAINLESS STEEL GRAB, CONCEALED FLANGE, GAMCO #150C-36, (PEENED NON-SLIP GRIPPING SURFACE).
- H 42" W STAINLESS STEEL GRAB, CONCEALED FLANGE, GAMCO #150C-42, (PEENED NON-SLIP GRIPPING SURFACE).
- I MIRROR - WIDTH OF SINK COUNTER, FROM TOP OF BACKSPLASH TO DOOR HEIGHT, POLISHED EDGE / PLATE GLASS; INSTALL PRIOR TO CERAMIC TILE.
- J MIRROR - 24" W. X 42" H., POLISHED EDGE / PLATE GLASS; INSTALL PRIOR TO CERAMIC TILE.

MILLWORK KEYED NOTES (ALL MAY NOT BE USED - THIS PROJECT)

- NOTE: VERIFY IF ANY LOCKS WITH CLIENT.
- 1 PLASTIC LAMINATE COUNTER.
 - 2 SOLID SURFACE COUNTER.
 - 3 HARD SURFACE (STONE/QUARTZ/GRANITE) COUNTER.
 - 4 4" H BACKSPLASH (AND SIDE SPLASHES, WHERE OCCURS) - TO MATCH COUNTER.
 - 5 STAINLESS STEEL SINK.
 - 6 CABINET WITH 16" D BUILT-IN BOTTOM SHELF FOR MICROWAVE. WITH PLASTIC LAMINATE ON CABINET INTERIORS.
 - 7 ADJUSTABLE SHELVES ON METAL PEG SYSTEM.
 - 8 PLASTIC LAMINATE DOOR / DRAWER FRONTS, WITH LOCKS WHERE SHOWN.
 - 9 PLASTIC LAMINATE FACED BOTTOM PANEL.
 - 10 PLASTIC LAMINATE DOORS WITH INTEGRAL TOE KICK. PROVIDE SCORING LINE ALIGNING WITH ADJACENT DRAWER / DOOR SEAM.
 - 11 PAINTED GYPSUMBOARD.
 - 12 BASE AS SCHEDULED.
 - 13 APPLIANCES PROVIDED BY TENANT, N.J.C.
 - 14 IN-WALL STEEL BRACKET. SEE DETAIL.
 - 15 PLASTIC LAMINATE FACED, 16" W, BOX/BOX/FILE FOLDER PEDESTAL, WITH FRONT TO BACK LETTER WIDTH PENTAFLEX FILE FOLDER RACKS.
 - 16 4" H. PLASTIC LAMINATE FACED TOE KICK.
 - 17 FINISHED END PANEL.
 - 18 BLIND CORNER CABINET.

MILLWORK GENERAL NOTES

1. SUBMIT MILLWORK SHOP DRAWINGS FOR REVIEW AND APPROVAL FOR ALL MILLWORK.
2. ALL EXPOSED SURFACES MILLWORK TO BE PLASTIC LAMINATE (W.N.O.).
3. INTERIOR OF ALL PLAS LAM CABTS AND DRAWERS TO BE WHITE MELAMINE.
4. PROVIDE 1/12" RADIUS CORNERS ON ALL OUTSIDE CORNERS OF ALL COUNTERTOPS OVER MILLWORK. PROVIDE 2" RADIUS CORNERS ON ALL OUTSIDE CORNERS OF OPEN COUNTERTOPS (WHETHER DESK HEIGHT, STANDING HEIGHT, OR TRANSACTION COUNTER HEIGHT.)
5. MILLWORK SHALL HAVE 4" SATIN CHROME WIRE PULLS. PROVIDE MILLWORK LOCKS WHERE NOTED.
6. PROVIDE GROMMETS IN COUNTERTOPS AT KNEEHOLE SPACES. ALL GROMMETS TO BE 2" Ø, BLACK OR WHITE - TO MATCH SOLID SURFACE, UNLESS NOTED OTHERWISE.

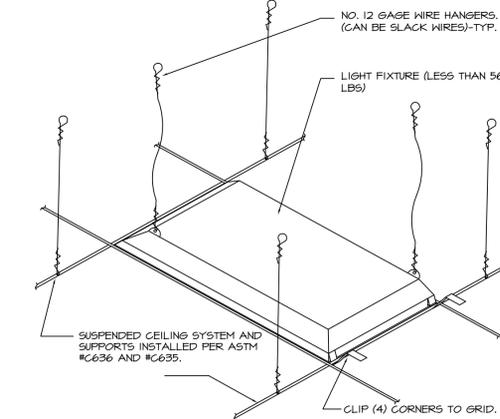

SEISMIC BRACING DETAIL

1/2"=1'-0" -

PIGIGES DESIGN INTERIORS LLC

ARCHITECTURE & INTERIOR DESIGN

SAN TAN VALLEY, AZ 85140

BLVD 16: 36457 N. GRANITZEL RD.

2nd CHANCE TREATMENT CENTER

DETAILS

PROJECT: PROJECT NO: 2125.01
DATE: 10-22-2021
REVISED:
DRAWN BY: JT

SHEET A3.0 OF

ARCHITECT REVIEW DISCLAIMER
I, JAMES P. ZANGRANAN, ARCHITECT, NO. 11313 N. CENTRAL AVENUE, SUITE 200, SAN TAN VALLEY, AZ 85140, AM A LICENSED ARCHITECT IN THE STATE OF ARIZONA. I HAVE REVIEWED THE DRAWINGS AND AFFIRM THAT THEY COMPLY WITH ALL APPLICABLE CODES AND REGULATIONS. I AM NOT PROVIDING ANY CONSULTING OR ENGINEERING SERVICES. MY INFORMATION AND AFFIRMATION WITH THESE DRAWINGS IS LIMITED TO THE INFORMATION PROVIDED TO ME BY THE CLIENT. I AM NOT PROVIDING ANY CONSULTING OR ENGINEERING SERVICES. MY INFORMATION AND AFFIRMATION WITH THESE DRAWINGS IS LIMITED TO THE INFORMATION PROVIDED TO ME BY THE CLIENT.

PH: (602) 595-2925
FAX: (602) 595-2925
PH: (602) 228-6871
PHOENIX, AZ 85032