

ROOM	FLOOR	WALLS	BASE	CEILING	WALL FINISH	COMMENTS
OFFICE	CER. TILE	DRYWALL	VINYL	ACOUSTIC TILE	TWO COATS INTERIOR LATEX	
HCP	CER. TILE	DRYWALL	VINYL	DRYWALL	TWO COATS EPOXY	
PRIVATE	CER. TILE	DRYWALL	VINYL	DRYWALL	TWO COATS EPOXY	
DR'S OFFICE	CER. TILE	DRYWALL	VINYL	ACOUSTIC TILE	TWO COATS INTERIOR LATEX	
EXAM	CER. TILE	DRYWALL	VINYL	ACOUSTIC TILE	TWO COATS INTERIOR LATEX	
TRIAGE	CER. TILE	DRYWALL	VINYL	ACOUSTIC TILE	TWO COATS INTERIOR LATEX	
JANITOR	CER. TILE	DRYWALL	VINYL	ACOUSTIC TILE	TWO COATS INTERIOR LATEX	
CLOSET	CER. TILE	DRYWALL	VINYL	ACOUSTIC TILE	TWO COATS INTERIOR LATEX	
MECHANICAL	CER. TILE	DRYWALL	VINYL	ACOUSTIC TILE	TWO COATS INTERIOR LATEX	
WAITING	CER. TILE	DRYWALL	WOOD	DRYL/AC TILE	TWO COATS INTERIOR LATEX	CHAIR RAIL & CROWN MOLD
HALLWAYS	CER. TILE	DRYWALL	WOOD	DRYL/AC TILE	TWO COATS INTERIOR LATEX	CHAIR RAIL & CROWN MOLD
GATHERING	CER. TILE	DRYWALL	WOOD	DRYL/AC TILE	TWO COATS INTERIOR LATEX	CHAIR RAIL & CROWN MOLD
RECEPTION	CER. TILE	DRYWALL	VINYL	ACOUSTIC TILE	TWO COATS INTERIOR LATEX	
NURSE STA.	CER. TILE	DRYWALL	VINYL	ACOUSTIC TILE	TWO COATS INTERIOR LATEX	




NO.	DESCRIPTION	FRAME	FINISH	QTY	HARDWARE	COMMENTS
101	3070 GLASS	ALUM	MILL	2 EA.	PUSH BAR	W/CLOSER & DEADBOLT
102	3068 SC	STEEL	PAINT	2 EA.	MANUAL	W/CLOSER & DEADBOLT
103	3068 HC	WOOD	PAINT	1 EA.	PRIVACY	
104	3042 HC	WOOD	PAINT	1 EA.	MANUAL	
105	3068 HC	WOOD	PAINT	3 EA.	MANUAL	
106	2068 HC	WOOD	PAINT	2 EA.	MANUAL	20 MIN. RATED W/CLOSER
107	3068 HC	WOOD	PAINT	15 EA.	PRIVACY	20 MIN. RATED W/CLOSER
108	3068 HC	WOOD	PAINT	2 EA.	PRIVACY	20 MIN. RATED W/CLOSER
109	2068 HC	WOOD	PAINT	15 EA.	PRIVACY	20 MIN. RATED W/CLOSER

NO.	DESCRIPTION	FRAME	QTY	COMMENTS
A	36"x60"	ALUM	12 EA.	FIXED GLASS-STORM RESISTANT
B	36"x36"	ALUM	2 EA.	FIXED GLASS-STORM RESISTANT
C	22"x24"	ALUM	2 EA.	FIXED GLASS-STORM RESISTANT
D	10" DIA 1/2" RND	ALUM	1 EA.	FIXED GLASS-STORM RESISTANT
E	48"x36"	ALUM	1 EA.	FIXED GLASS-20 MIN. RATED

NOTE: ALL DOORS TO HAVE LEVER-TYPE HANDLES PER ADA. EXTERIOR DOORS TO REMAIN UNLOCKED DURING HOURS BUILDING IS OCCUPIED. NOTE: ALL RATED DOORS TO HAVE SIGN: "TO REMAIN CLOSED AT ALL TIMES"


NOTE: ATTIC ACCESSSES TO BE 5/8" "X" DRYWALL PANEL W/R-30 INSUL. ABOVE
 *Must be 45-minute rated per Table 7.5.5
 Type III construction requires 2-hour rated block.
 Provide 2-hour block documentation

HANDICAP LUNCH RM SINK
 RATED DOOR LABELS
 RATED DOOR CLOSERS
 LABEL PANEL
 BOTH FAN

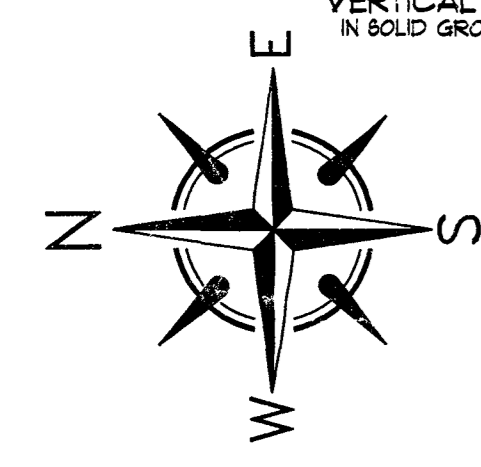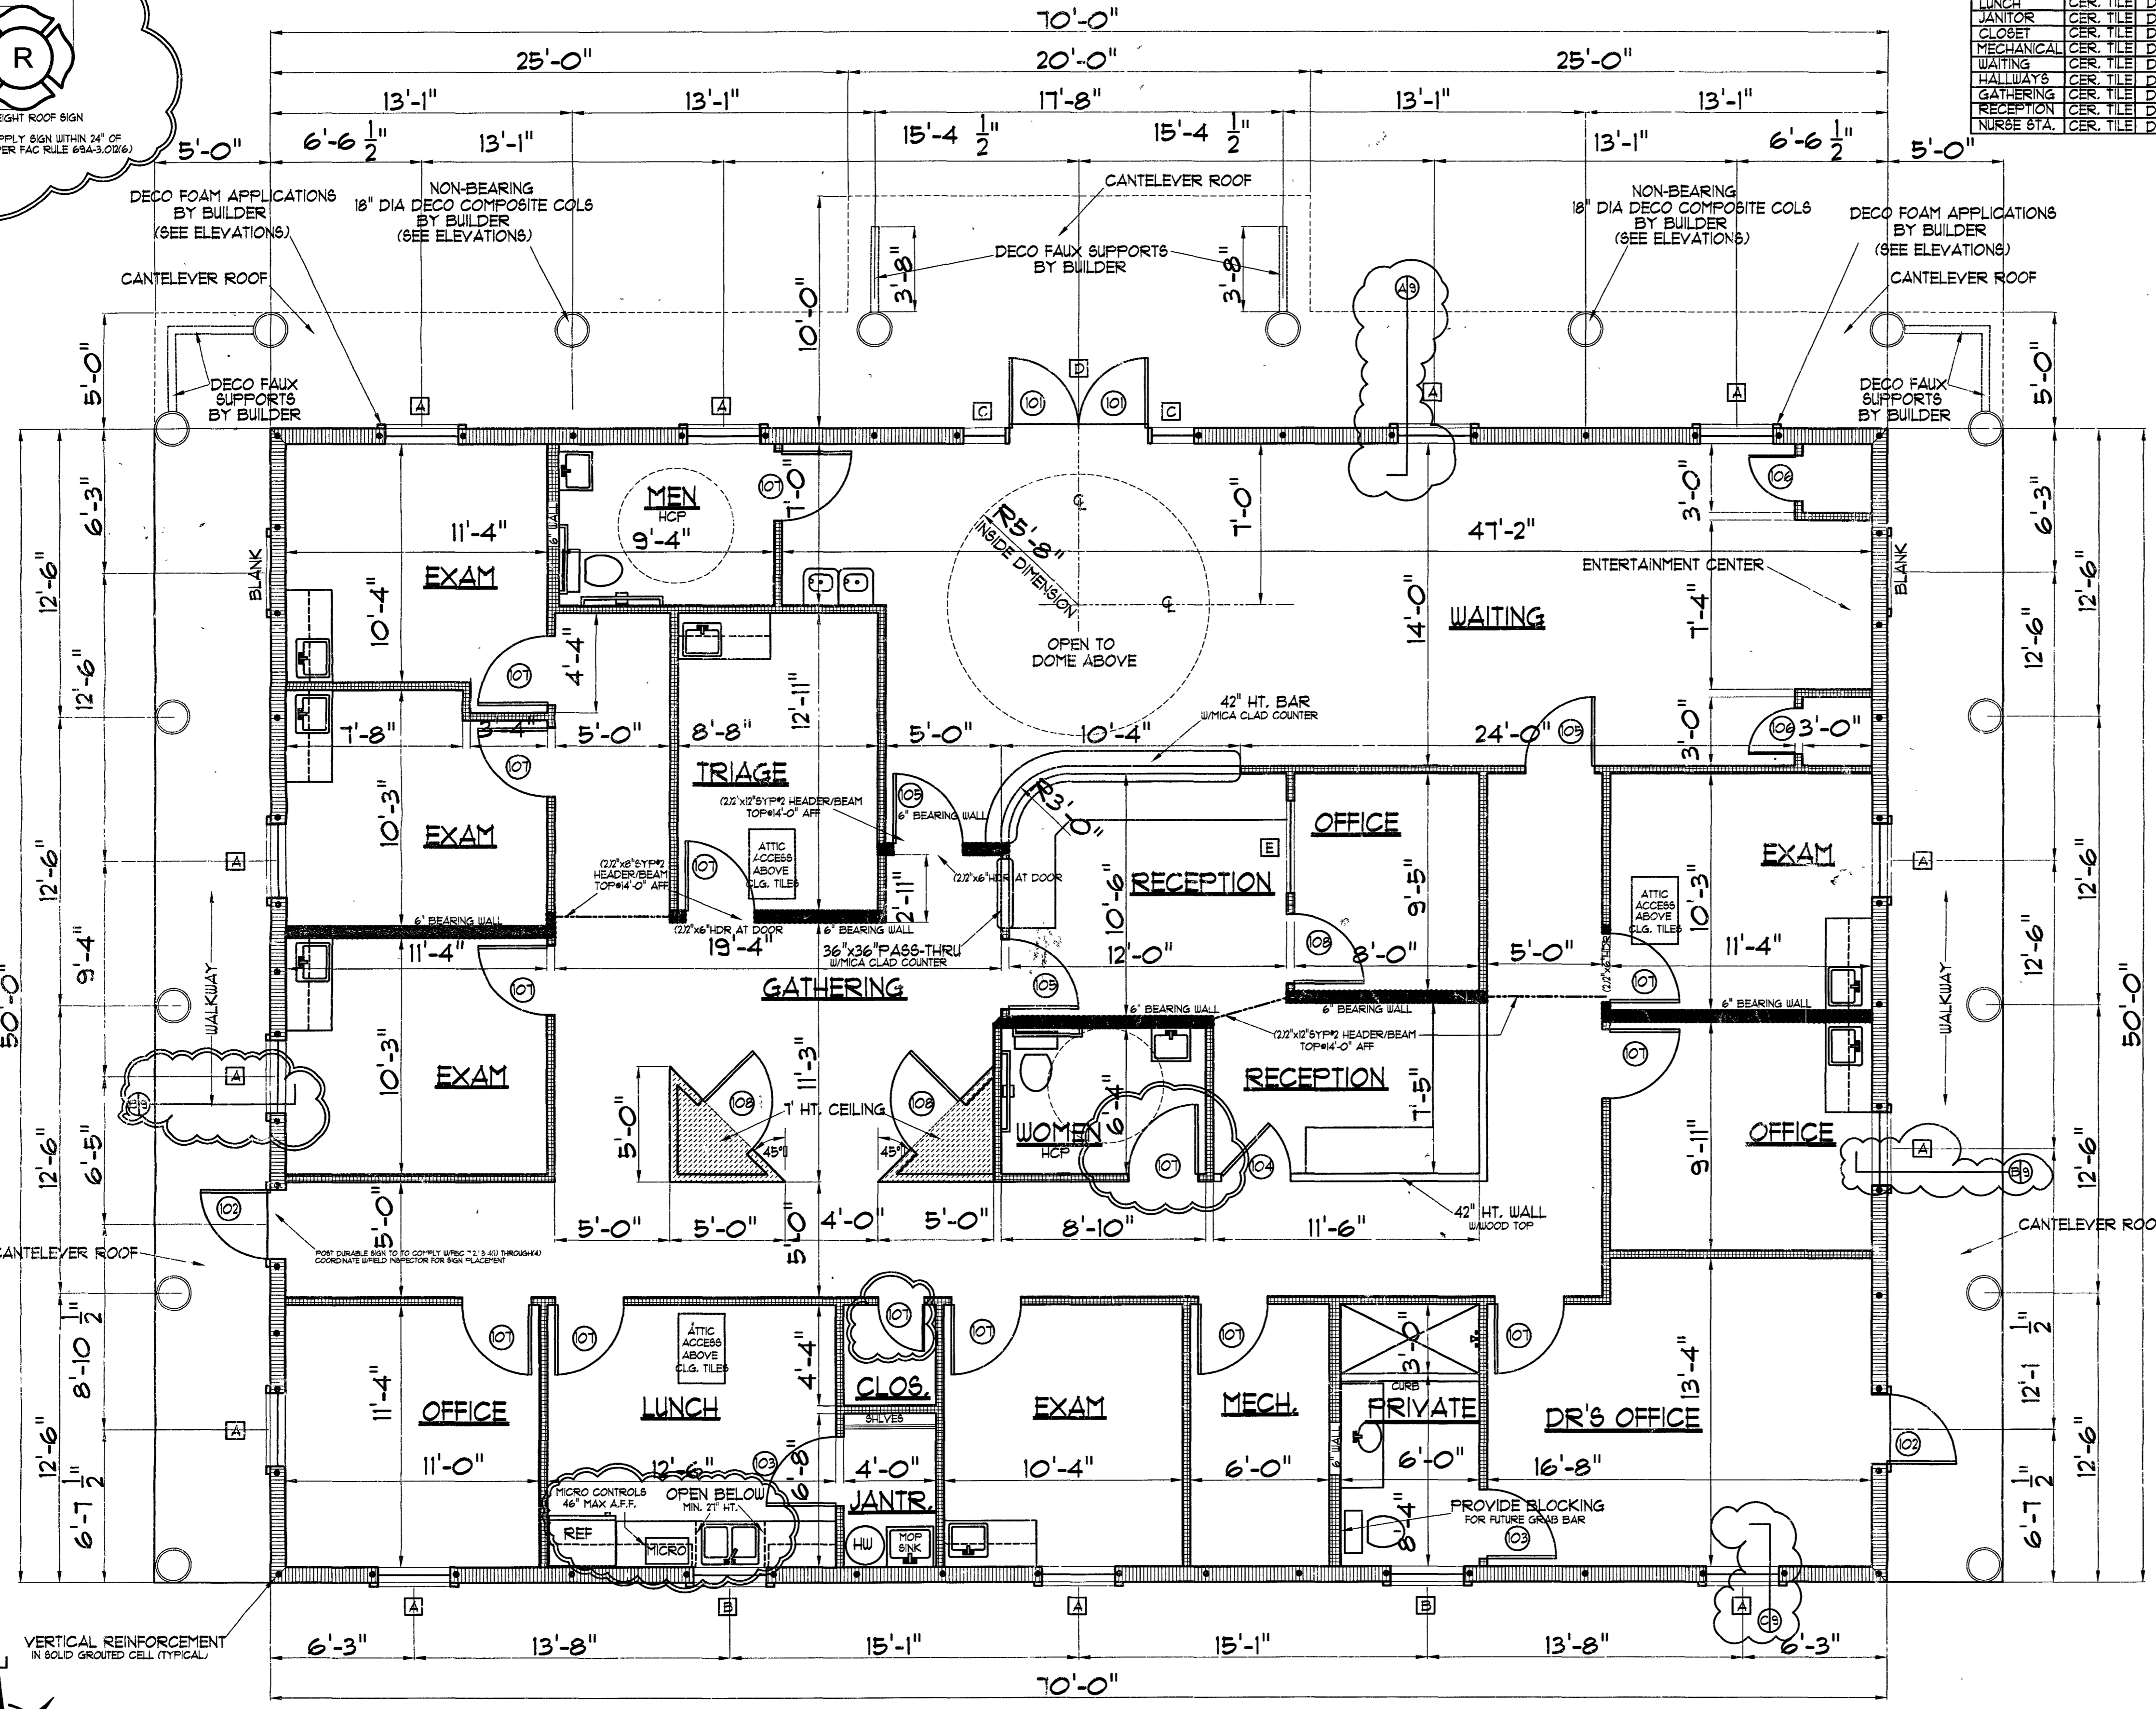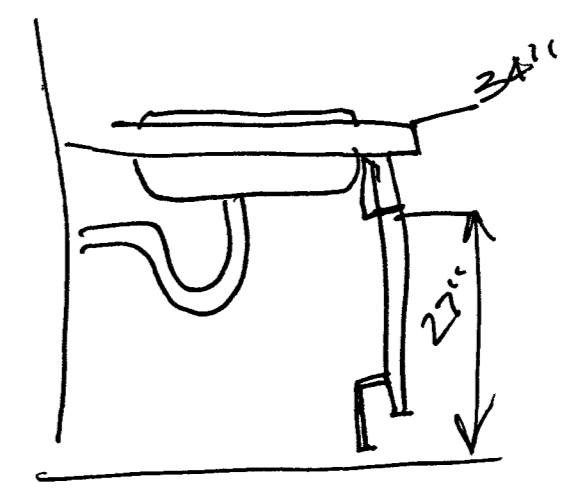

FLOORPLAN SCALE: 1/4"=1'-0"
 NOTE: WALLS 8" EXTERIOR, 4" INTERIOR, EXCEPT AS NOTED

Fire Extinguishers will be Provided by Local Fire Safety Equipment Company and meet requirements of NFPA 10. General Contractor shall coordinate final approval of Class, number, location and spacing with Field Inspector.

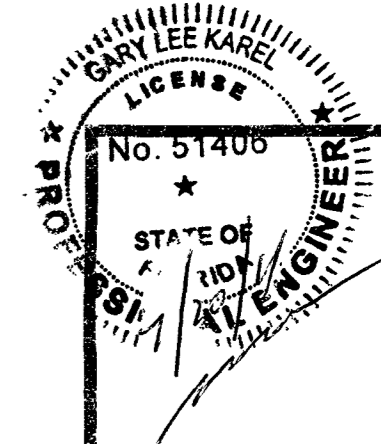

DRAWINGS DESIGNED TO MEET WHERE APPLICABLE
 DESIGN SECTION 1609, FEB 2007
 FOR WIND LOADS OF 130 MPH EXPOSURE 'C' ENCLOSED STRUCTURE
 FLORIDA BUILDING CODE 2007 Edition (FBCR 2007 WHERE APPLICABLE) 2009 'S'
 FLORIDA FIRE PREVENTION CODE 2007
 FLORIDA LIFE SAFETY CODE 2007
 NATIONAL ELECTRIC CODE 2008

DR. KUMAR
 MEDICAL OFFICE BUILDING
 1616 APOLLO BLVD.
 MELBOURNE, FL

G.L. Karel P.E. FL 51406
 8675 Flamingo Road
 Melbourne Village, Florida 32904
 Phone and Fax 321 723-9393
 GLKPE@CFL.RR.COM

SHEET
 1
 of
 14