GENERAL NOTES

1. ALL DIMENSIONS GIVEN TO CENTERLINE OF INTERIOR STUD PARTITION, CENTERLINE OF STEEL, FACE OF MASONRY OR OUTSIDE FACE OF EXTERIOR WALL STUD UNLESS OTHERWISE NOTED

2. ═══ DENOTES TYP. EXTERIOR WALL -⅝" G.W.B. (TO BE INSTALLED AT TIME OF UPFIT IN UNFINISHED SPACES) ON 6" STEEL STUDS (UNLESS OTHERWISE NOTED - SEE WALL SECTIONS) @ 16" O.C., ½" DENGLASSSHEATHING & BRICK WAINSCOT W/ E.I.F.S. ABOVE (3" EXTRUDED POLYSTYRENE, FLAME SPREAD - 5, SMOKE DEVELOPED - 45-175)

7. NOTHING WILL BE STORED ABOVE 12' A.F.F. NO OIL WILL BE CHANGED.

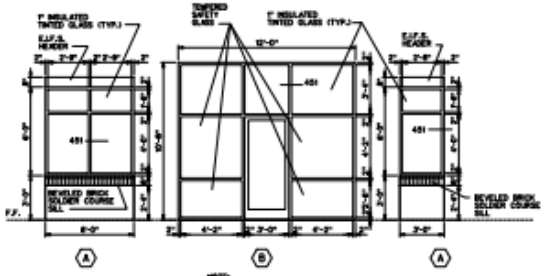

WINDOW TYPES
1/4" = 1'-0"

NOTE:
ALL ALUMINUM STOREFRONT WINDOWS TO BE "KAWNEER" OR EQUIVALENT CLEAR ANODIZED FINISH W/ 1" INSULATED GLASS UNLESS OTHERWISE NOTED. COLOR OF PAINT AND OPAQUE SPANDREL TO BE SELECTED BY ARCHITECT

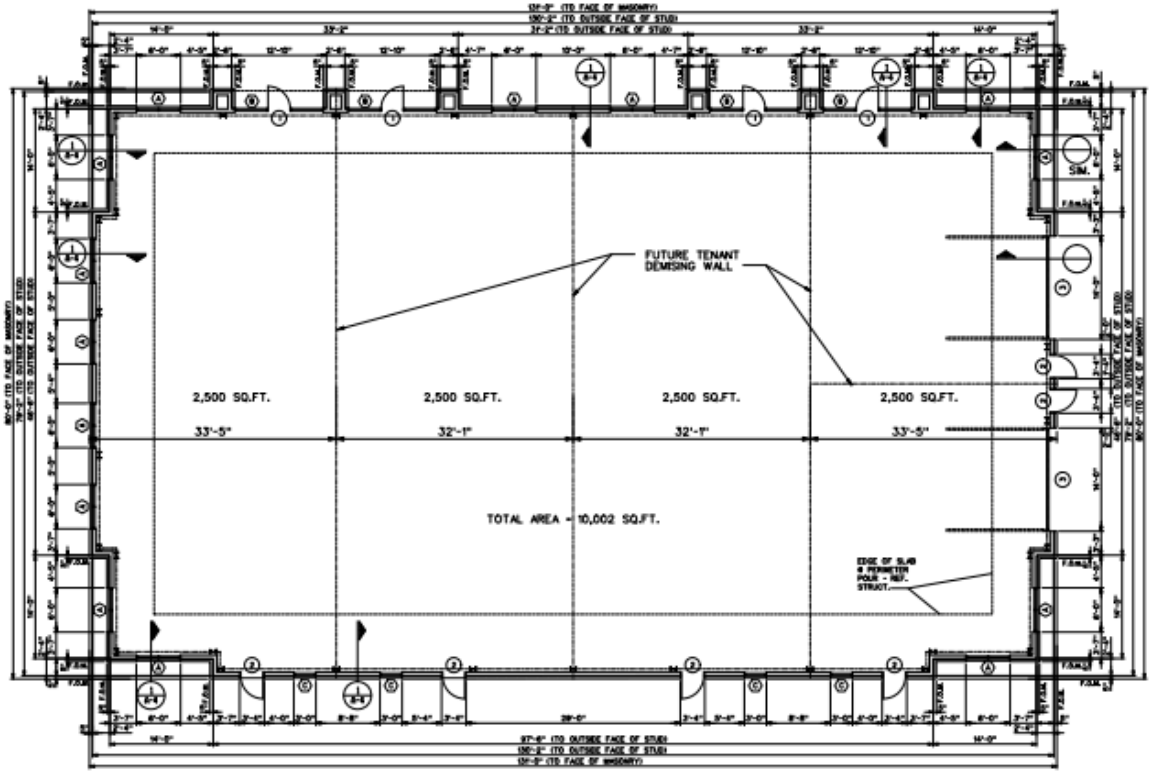

FLOOR PLAN
1/8"=1'-0"

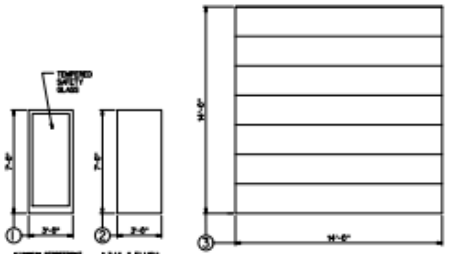

ALUMINUM STOREFRONT DOOR - KAWNEER TYPE 350T MEDIUM STILE W/ ½" TEMPERED GLASS

1 3/4" FLUSH HOLLOW METAL DOOR

INSULATED SECTIONAL METAL OVERHEAD DOOR W/ STANDARD HORIZONTAL LIFT TRACK & HEAVY DUTY COMMERCIAL ELECTRIC DOOR OPENER. DOOR TO MEET 90 MPH WIND LOAD. DOOR TO BE OVERHEAD DOOR COMPANY 5500 SERIES THERMACORE INSULATED STEEL DOOR W/ R-VALUE-R-17.5 & U-VALUE-0.057

DOOR TYPES
1/4"=1'-0"



ALUM. STOREFRONT FRAME - KAWNEER TRI-FAB 451 SERIES

SF-1

F-2

FRAME TYPES
1/4"=1'-0"



HOLLOW METAL FRAME DIMENSIONS
3"=1'-0"

KAWNEER TRI-FAB 451 ALUMINUM STOREFRONT WINDOW FRAMES W/ 1" INSULATED GLASS

451

STOREFRONT TYPES
3"=1'-0"

THRESHOLD TYPES
3"=1'-0"

Wilbur Associates
Architecture / Planning
PA Box 451 - 20547 N.Main St.
Cornelius, NC 28031
704-895-5455

NOTE
This drawing is property of the firm, Wilbur Associates. Reproduction or reuse in part or in whole without written permission is forbidden.

SEAL

TITLE

A NEW OFFICE BUILDING
NORTHCROSS III
917 NORTHCROSS CENTER CT.
HUNTERSVILLE, NORTH CAROLINA

CONS. NO. 1578
DATE 11/9/16
REVISIONS

SHEET
A-1
OF
5