

REVISIONS:

LEGEND

- PLUMBING WASTE NOTES**
- CONNECT TO EXISTING SS & VENT LINE.
 - LOCATE AND CONNECT TO EXISTING VENT LINE.
 - LOCATE AND CONNECT TO EXISTING SS LINE.
 - LOCATE AND CONNECT TO EXISTING SS LINE.

PLUMBING SPECIFICATION NOTES

- ALL WORK SHALL CONFORM TO LOCAL CODES.
- WATER LINES INSIDE BUILDING: TO 10' OUTSIDE COPPER TYPE "L" WITH LEAD FREE SOLDER OR SCHEDULE 40 GALVANIZED STEEL WITH WALLEABLE RISK SOLDERED FITTINGS.
- WATER LINES, WATER METER TO 10' OUTSIDE BUILDING: SCHEDULE 40 PVC WITH SWEAT JOINTS.
- WASTE AND VENT: SCHEDULE 40 PVC WITH DRAINAGE PATTERN FITTINGS AND SWEAT JOINTS. USE METAL WASTE & VENT PIPING WITH AIR RETURN AIR PLUMBING.
- PROVIDE SHUT-OFF VALVES AT FIXTURES.
- CAULK/SEAL ALL FIXTURE MOUNTING AT COUNTER, WALL AND FLOOR AS APPLICABLE.
- ALL FIXTURES AND EQUIPMENT SHALL BE PACKAGED WITH A UNION TYPE CONNECTION TO FACILITATE REMOVAL/SERVICE.
- INSTALL HOT WATER LINES FROM WATER METER THROUGHOUT SYSTEM WITH 3/4" THERMOPLASTIC FIBERGLASS FIBER OR 1/2" TYPE RUBBER OR POLYURETHAN FLEXIBLE FROM.
- COORDINATE WITH UTILITY COMPANIES AS REQUIRED FOR SERVICE AND METER LOCATIONS.
- NOTIFY THE UTILITIES PROTECTION CENTER AT LEAST THREE BUSINESS DAYS BEFORE ANY WORK.
- NOTIFY THE UTILITIES COMPANY(S) WHOSE LINES ARE ROUTED THROUGH, CONNECTED TO, OR ARE IN 10' PROXIMITY OF CONSTRUCTION SITE.

PLUMBING FIXTURE SCHEDULE


| SYM | DESCRIPTION | MANUFACTURER MODEL | COLD | HOT | WASTE | NOTES |
|-----|---|--------------------|------|------|--------|---------------|
| WC1 | WATER CLOSET, ADA RATED, FLOOR MTD, ELONGATED BOWL, TANK TYPE, 1.6GPF | KOHLER K-3544 | 1/2" | 1/2" | 3" | 4,6,9 |
| LI | LAUNDRY, ADA RATED, WALL MTD, VITREOUS CHINA, 4" CENTERS, SINGLE LEVER FAUCET | KOHLER K-2032 | 1/2" | 1/2" | 1 1/2" | 1,2,5,6,7,8,9 |
| SI | SINK, COUNTER MTD, SELF-RIMMING, SINGLE LEVER FAUCET, 4" CENTERS, 18 GA STAINLESS STEEL | JUST SE-2133-4-GR | 1/2" | 1/2" | 1 1/2" | 3,6,7,9 |
| MS | EXISTING - RELOCATED | | | | | |
| WH | WATER HEATER, 40 GALLON, PWT VALVE | STATE SPS-60-20RS | 1/2" | 1/2" | 1/2" | |

NOTES:

- TRAILERY #103
- WASH FAUCET 1/2"
4. SINK: HEAVY DUTY SOLID PLASTIC, OPEN FRONT WITH STAINLESS STEEL SELF-SUSPENDING HINSE.
5. SINK: HEAVY DUTY SOLID PLASTIC, OPEN FRONT WITH STAINLESS STEEL SELF-SUSPENDING HINSE.
6. SINK: HEAVY DUTY SOLID PLASTIC, OPEN FRONT WITH STAINLESS STEEL SELF-SUSPENDING HINSE.
7. TRAP: 1 1/2" DIA. CHROME PLATED BRASS.
8. TRAP: 1 1/2" DIA. CHROME PLATED BRASS.
9. TRAP: 1 1/2" DIA. CHROME PLATED BRASS.
10. UNDER-LAY PIPING INSULATION.

PLUMBING LEGEND

| | |
|-----|--------------------------------------|
| SW | SHOCK STOP, PISTON TYPE |
| WC | WATER CLOSET |
| L | LAUNDRY |
| EW | ELECTRIC WATER COOLER |
| VTR | VENT THRU ROOF |
| S | SINK |
| WH | WATER HEATER |
| CO | CLEAN OUT (F=FLOOR-LEVEL, W=WALL) |
| MS | MISC SINK |
| SW | SWITCH |
| W | WATER |
| C | COLD |
| H | HOT |
| E | ELECTRIC |
| V | VENT |
| R | ROOF |
| P | PRESSURE/TEMPERATURE |
| R | RELIEF VALVE |

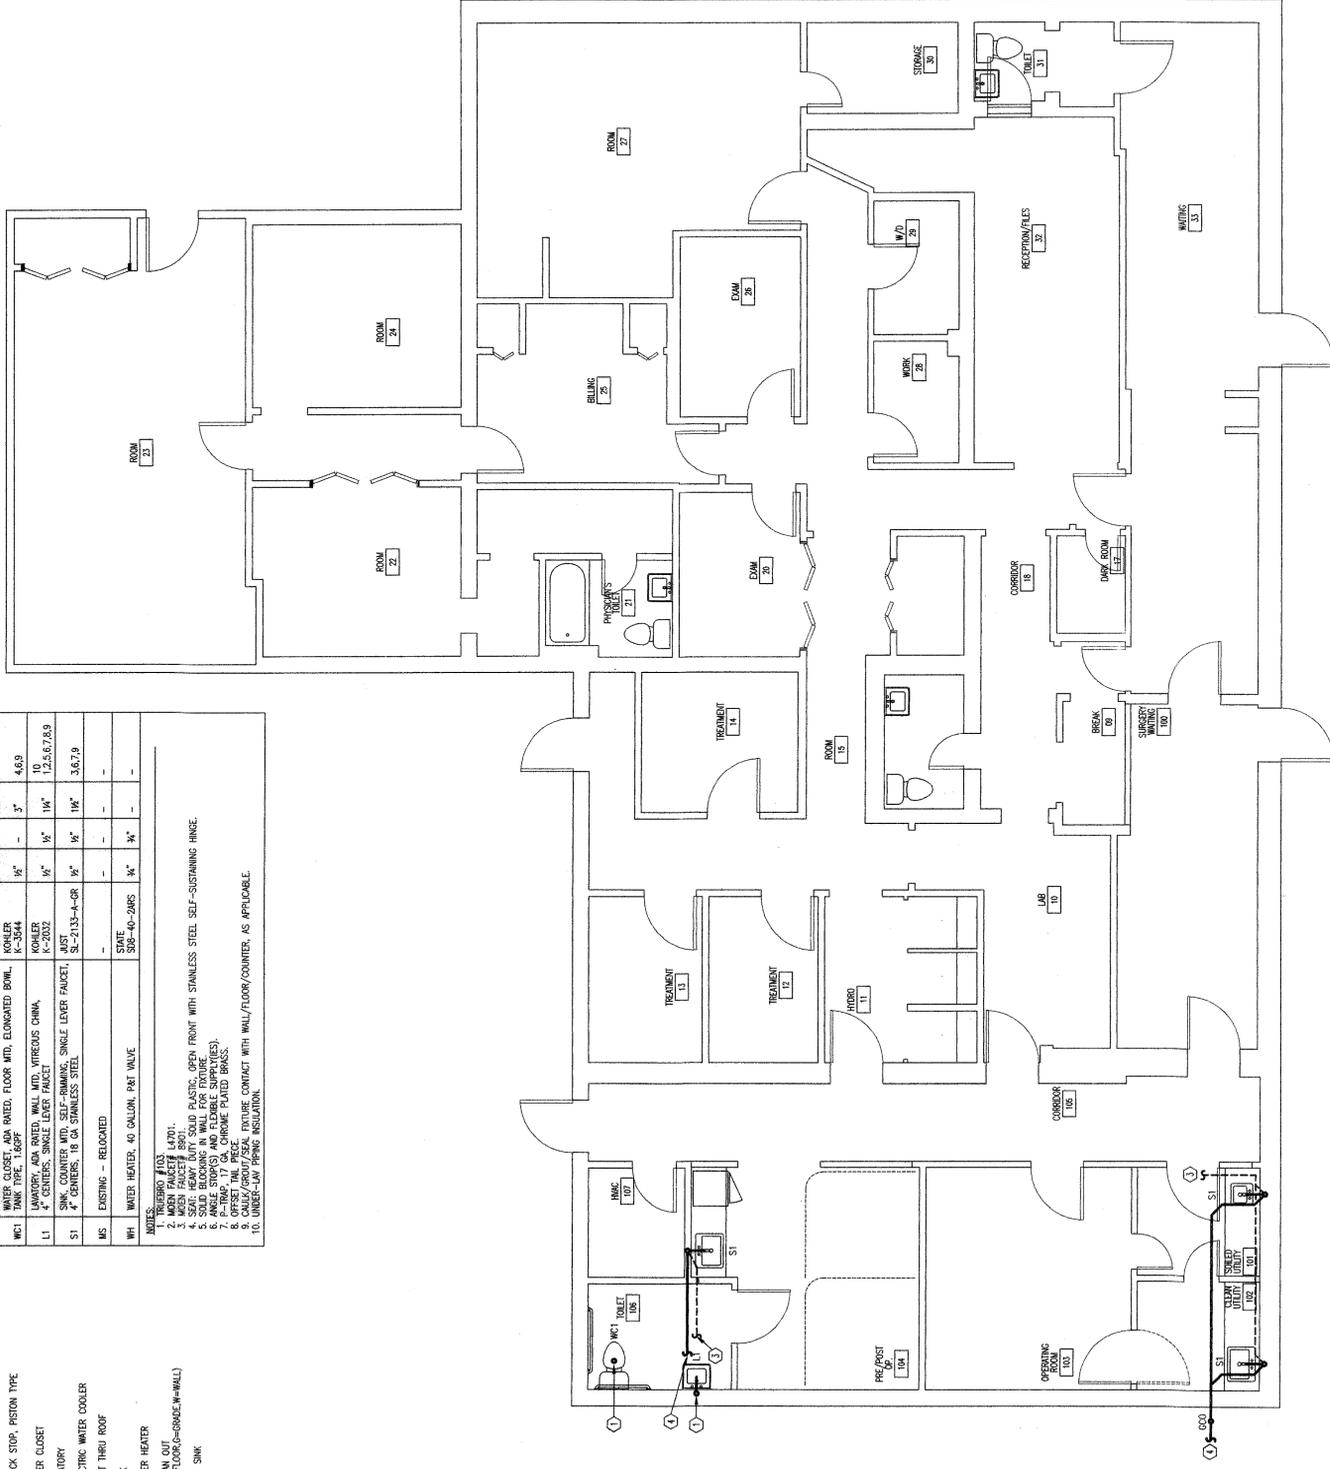

1 NEW FLOOR PLAN - PLUMBING WASTE
SCALE: 1/4" = 1'-0"

PROJECT #2008-040

DESIGNED BY

ENGINEER

ARCHITECTURE

100 E. PALM BLVD. SUITE 300
SAVANNAH, GEORGIA 31401
PHONE 912-355-8400 FAX 912-355-8409

GENERAL NOTE:

DRAWINGS ARE SCHEMATIC. CONTRACTOR IS RESPONSIBLE FOR COORDINATION OF ALL DEVICE LOCATIONS AND INTERCONNECT ROUTING WITH ARCHITECTURAL AND STRUCTURAL CONFIGURATIONS AND REQUIREMENTS.



UNLICENSED ARCHITECTS
This drawing is the property of Lott Barber Architects, Inc. It is to be used only for the project and location specified hereon. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of Lott Barber Architects, Inc.