

ASSUMPTIONS

1. ACCESSIBLE WATER CLOSET IS FLOOR MOUNTED
2. CONTROLS FOR FLUSH VALVES SHALL BE MOUNTED ON THE OPEN SIDE OF THE TOILET AREA
3. TOILET ROOM DOOR OPENING WIDTH TO BE MIN. OF 32"
4. TOILET ACCESSORIES TO BE PROVIDED
5. GRAB BARS SHALL COMPLY WITH FCC ACCESSIBILITY 6TH EDITION SECTION 604.5
6. CLEAR FLOOR SPACE @ LAVATORY SHALL TO COMPLY WITH FCC ACCESSIBILITY 6TH EDITION SECTION 606
7. CLEAR FLOOR SPACE @ WATER CLOSET COMPLY WITH FCC ACCESSIBILITY 6TH EDITION SECTION 604
8. PROVIDE 2X6 BLOCKING AS REQUIRED FOR ALL GRAB BARS WITH SUPPORT MINIMUM 250 P.S.F. LOAD PER SECTION 603.8.

WAREHOUSE UNIT D
FUTURE TENANT BUILD OUT

WAREHOUSE UNIT E
FUTURE TENANT BUILD OUT

WAREHOUSE UNIT F
FUTURE TENANT BUILD OUT


TOILET
ROUGH IN ONLY

STORGE


TOILET
ROUGH IN ONLY

STORGE

FLOOR PLAN
SCALE: 3/16" = 1'-0"

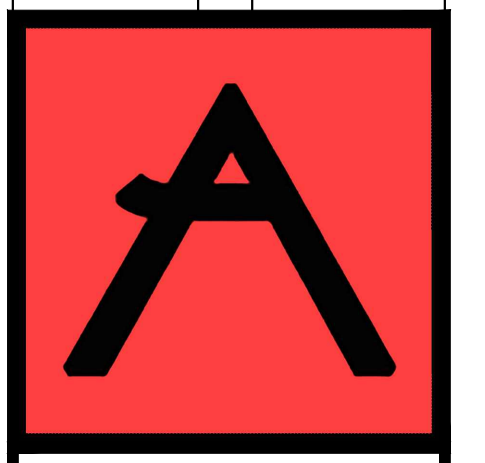

ATELIER
DESIGN GROUP
ARCHITECTS
P.O. BOX 353217
PALM COAST, FL 32135
DAVID@ATELIER-DESIGNGROUP.COM
386.503.5103
COPYRIGHT © 2023

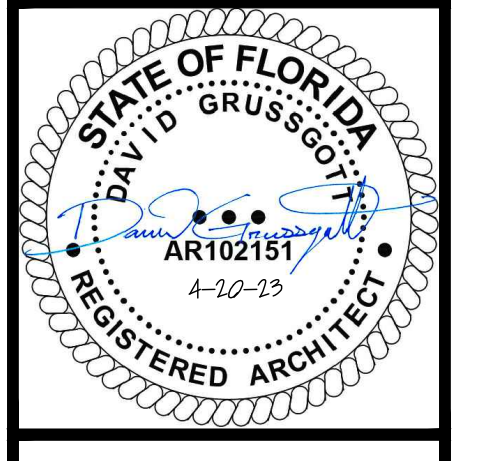

DAVID
GRUSSGOTT
ARCHITECT
AIA - NCARB
LIC: AR102151
P.O. BOX 353217
PALM COAST, FL 32164

A METAL BUILDING FOR:
V3 LLC ADDITION
25 RAILSIDE WAY, PALM COAST, FL 32137
FLOOR PLAN

DATE: 12.5.22	JOB NO: 2020015	
REV #	DATE	ISSUE
	2.10.23	PERMIT SET
	2.23.23	PERMIT SET
	4.20.23	BUILD DEP

