



5002 BUSINESS PARK DRIVE, STE 190



5002 BUSINESS PARK DRIVE, STE 190



AMPLE NATURAL LIGHTING



SHOWROOM / OPEN OFFICE LAYOUT



BREAK AREA - ROOM FOR FULL SIZE FRIDGE



MODERN GLASS FRONT ENTRANCE



PRIVATE REAR CORNER OF DEVELOPMENT



VIEW FROM SW CORNER OF WAREHOUSE



WEST SIDE OF WAREHOUSE



GRADE LEVEL & DOCK HIGH OVERHEAD DOORS



VIEW FROM NW CORNER OF WAREHOUSE

Refer To Listing On Rear Of Deadfront Cover
Assembly For Information Regarding Field
Installable Device Kits.

Suitable for use as service equipment when:
a) Not more than six disconnecting means are provided,
and
b) When not used as a lighting and appliance
branch-circuit panelboard, and
c) When main bonding jumper Type PRLMB is
installed in the panelboard if the panelboard is equipped
with an insulated grounded circuit conductor (neutral),
and
d) When service barrier Type PRLSIB is installed on a
circuit breaker being used as a single service disconnect
within the panelboard.

Pnl Type	PRL1A	Pnl Amps	225
Volts	208Y/120V	Phase 3	Wire
Neut Cat	1C96649G02	Neut. Amps	225
Date	02/02/2021	Neut. Volts	120
Box Cat	EZB2048R	Box Type	1
Job No	PRL1A3225X42CS	Mfg At	JRZ



HAZARDOUS VOLTAGE
May cause severe injury, death or
property damage.

Connect only 240V rated breakers to
the "High Leg" or "Wild Leg" Phase.

* Maximum - See Main Circuit
Breaker Rating
TERMINALS ARE SUITABLE FOR CU OR
AL - Use 75°C Conductors.

Through Feed And Subfeed Panelboards
Are Limited For Use On A System Capable
Of Delivering Not More Than 10,000A,
rms Symmetrical, Unless Panelboard Has
An Integral Main Or Is Connected
Downstream From An Overcurrent
Protective Device As Stated In The
Attached "Series Rating Information
Manual".
Automatic Trip Of Circuit Breaker Is
Indicated By Handle Position Midway
Between "On" And "Off". Restore Service
By Moving Handle To "Off" Then "On".

Horizontally Mounted Breakers
To Be 100A Maximum.

900P051H01 R7

Pnl Type	PRL2a	Pnl Amps	225
Volts	480Y/277V	Phase 3	Wire 4
Neut Cat	1C96649G02	Neut. Amps	225
Date	10/12/2020	Neut. Volts	277
Box Cat	EZB2048R	Box Type	1
Job No	PRL2A3225X42CS	Mfg At	JRZ



HAZARDOUS VOLTAGE
May cause severe injury, death or
property damage.

Connect only 240V rated breakers to
the "High Leg" or "Wild Leg" Phase.

* Maximum - See Main Circuit
Breaker Rating
TERMINALS ARE SUITABLE FOR CU OR
AL - Use 75°C Conductors.

Through Feed And Subfeed Panelboards
Are Limited For Use On A System Capable
Of Delivering Not More Than 10,000A,
rms Symmetrical, Unless Panelboard Has
An Integral Main Or Is Connected
Downstream From An Overcurrent
Protective Device As Stated In The
Attached "Series Rating Information
Manual".
Automatic Trip Of Circuit Breaker Is
Indicated By Handle Position Midway
Between "On" And "Off". Restore Service
By Moving Handle To "Off" Then "On".

Horizontally Mounted Breakers
To Be 100A Maximum.

900P051H01 R7




480/277V 225AMP AND 208/120V 100AMP





LOUVERS HELP FACILITATE VENTILATION

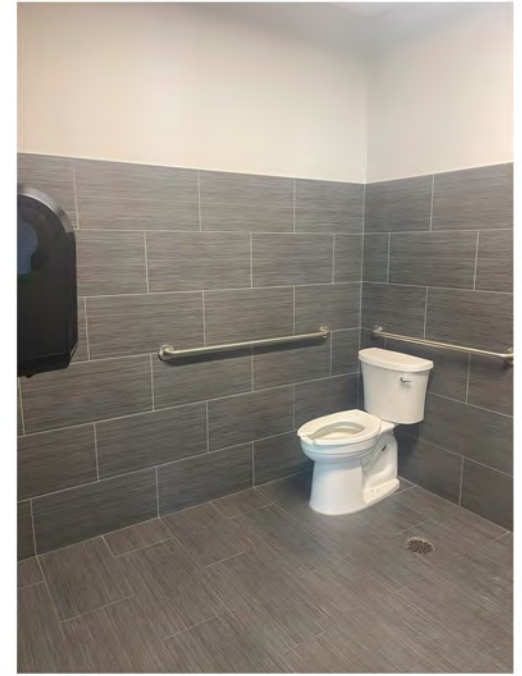

MODERN SPACIOUS MEN'S AND WOMEN'S ADA RESTROOMS