

Septic System Permit

Flathead City-County Health Department

Environmental Health Services

1035 1st Avenue West, Kalispell, MT 59901

Phone: (406) 751-8130 / Fax: (406) 751-8131

Permit Number:

13-6440-N

Site Eval Receipt

12-0826

Date Issued:

9-26-13

Zone:

2

Date Recorded:

1. Legal Description: Co. Assess. Tr.#

Subdiv. Name: SUBDIVISION 147 AMD L1 & 2

COS #:

Name/EQ:

Property Address: 380 HASKILL BASIN RD WHITEFISH MT 59937

Sec 28

Twp 31

Rng 21

Lot: 2A

Block:

Parcel Size: 20

acres

2. Legal Property Owner Coffin Family Partnership Ltd. (Philip Coffin)

Address and Phone 2155 Ronal Reagan Blvd., Georgetown, Texas 78628

3. Authorized for: New

Existing Structure:

4. Structure: Proposed Structure Conv. Single Family

Specify:

5. System Use: Individual

6. Occupancy Type: No. of Bedrooms #: 3

Other Permits:

7. Water Supply: Individual

Public:

8. Nitrates:

Source: WELL

9. Soil Type: Gravelly Cobbly Loamy Till

How Determined: Submittal

10. Depth to Groundwater Table/Bedrock: 72 inches How Determined: Submittal

11. Classification: 1 Septic Tank Size (gal- min): 1000/500 Absorption Area (sq ft): 700

Permit Fee: \$ 235.00

12. Drainfield Description:

SYSTEM DESCRIPTION:

This system shall be installed in accordance with applicable Flathead City/County Health Department, (FCCHD), regulations and the design prepared by D. Holst, which was approved by FCCHD on 9/9/2013. Any changes from the approved design must be approved by the designer and FCCHD prior to modification of the project. Use the approved drainfield site oriented E-W with minimum drainfield trench lengths of 60 feet, as indicated in the subdivision approval or nondegradation review.

SPECIAL NOTES:

The installer and a representative from FCCHD must be present for the inspection and clear-water pump test. If the system was designed by a professional engineer, a representative of that office must also be present. Minimum well separations = 50 feet to solid lines and septic tank and 100 feet to drainfield.

Pump and alarm must be on separate electrical circuits.

The first five feet of force main out of the pump chamber must be schedule 80 pipe.

Maximum trench depth 24 inches. Maximum length of any single distribution lateral is 100 ft (200' with center manifold).

System shall not be covered or backfilled until specifically authorized by FCCHD.

Use at least 0233 lineal feet of Standard Rock & Pipe in 3 foot wide trenches. Approved design report and layout sketch are

09/10/2013

Wendee Jacobs, R.S.


Date

Signature Authorizing Approval of Permit

* These requirements establish the MINIMUM STANDARDS for this septic system installation. The permit will be voided and declared invalid if the system is not installed within 12 months. The issuance of this permit authorizes construction of the septic system and requires the installation comply with the FLATHEAD COUNTY REGULATIONS FOR SEWAGE TREATMENT SYSTEMS (FCRSTS). The permit will be void if the system is not utilized as intended within three (3) years of installation. The property owner is responsible for operating and maintaining the system in accordance with FCRSTS. Failure to comply with these regulations may result in revocation of this permit. This permit does not constitute a design and does not bind or obligate this office to guarantee the performance of the system. This permit shall be given to the installer prior to construction. The owner shall give 48 hours advance notice for the required inspection of the system. Please call 751-8130.

1N

LAYOUT

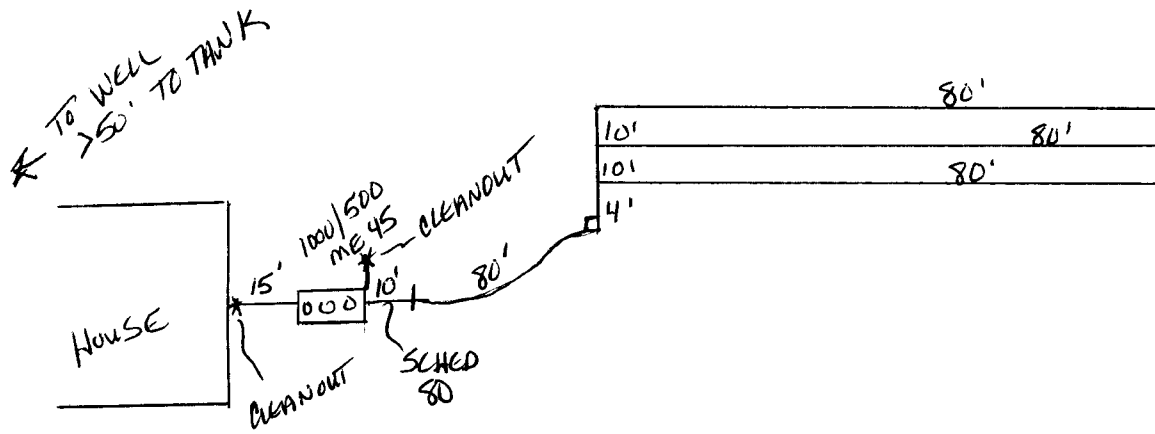

GPS Location: North 48 Deg. 25 ' 27.6" West 114 Deg. 17 ' 6.6"

Water source developed at time of inspection? YES ☒ NO ☐ Distribution YES ☐ NO ☒

Disapproved/Date _____ Comments _____

Approved/Date 9/27/2013 Comments Rock & PIPE TRENCH CONSTRUCTION; SQUIRT TEST = 4'

Inspectors Signature Wanda Jacobs RS. Name of Installer/Phone Chad Roth 249-61164