

Building / Racking Plan Notes and Specifications

Pick modules


- Approximately 20,000 item/facings in four (4) double-level pick modules
- Carton flow allowable load: 25 PSF / shelf
- Catwalk allowable live load: 60 PSF

Rack supported conveyor

- 114" wide bays with 3.5" high beams; allowable load per level 3,000 lbs
- 96" wide bays with 4" high beams; allowable load per level 5,000 lbs

Reserve pallet rack

- Approximately 25,000 pallet positions in reserve locations
 - 60% at 3,000 lbs / beam level
 - 30% at 4,900 lbs / beam level
 - 10% varies 2,500-5,300 lbs / beam level

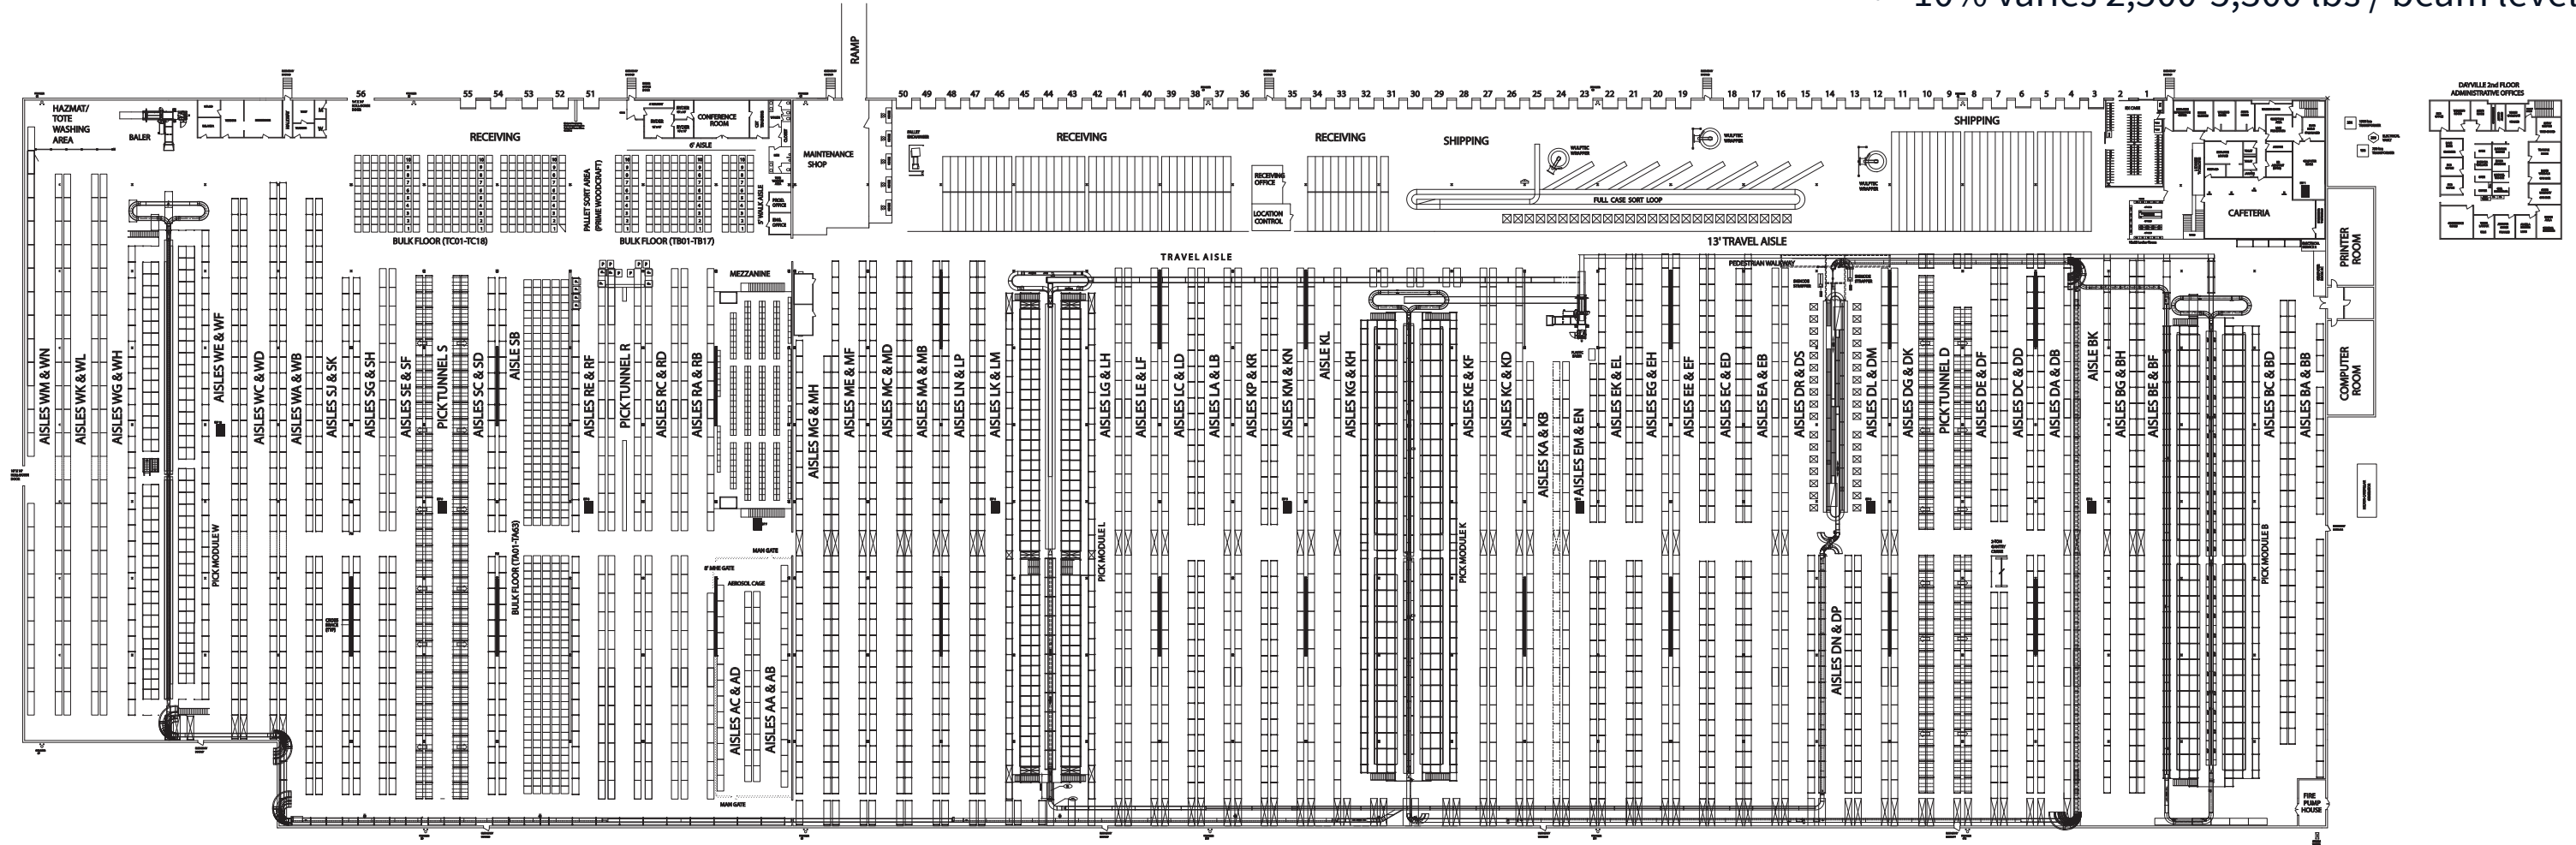



JLL

SEE A BRIGHTER WAY