

FINISH SCHEDULE

X

CODE	DESCRIPTION	MANUFACTURER	STYLE / PATTERN / COLOR	NOTES
FRP	FIBER REINFORCED PLASTIC	CRANE COMPOSITES	WHITE (GLASSBOND WITH SUBSTRATE)	
B-1	VINYL WALL BASE	JOHNSONITE	48 BLACK B (4" X .87" THICK)	PROVIDE SCHEDULE B-1 FINISH TO ALL WALLS AND PARTITIONS.
F-1	SEALED CONCRETE	ASHFORD FORMULA	LEVEL 2 FINISH	SEE ALSO SCHEDULE B-1 HEALTH DEPARTMENT APPROVED INTERIOR DOOR AND INSIDE DOOR.
P-1	PAINT	SHERMAN WILLIAMS	SITEN WHITE #1070	OUTSIDE OF EXTERIOR DOOR.
P-2	PAINT	SHERMAN WILLIAMS	INKWEL #892	EXTERIOR DOOR.

NOTE: NO ALTERATIONS ON FINISHES WITHOUT CORPORATE APPROVAL.

GENERAL NOTES

- REFER TO WALL SECTIONS AND ELEVATIONS FOR ADDITIONAL INFORMATION AND REQUIREMENTS.
- INTERIOR WALL AND CEILING FINISH MATERIALS SHALL BE INSTALLED IN ACCORDANCE WITH ALL APPLICABLE CODES.
- ALL FINISHES SHALL MEET FLAME SPREAD AND SMOKE DEVELOPMENT RATINGS FOR THEIR USE, AS REQUIRED BY LOCAL CODES.
- 5/8" CHILL CALK JOINT BETWEEN CEILING GRID & FRP WALL FINISH IN ALL KITCHEN, JANITOR AND OFFICE AREAS.
- ALL HOLLOW METAL DOORS AND FRAMES (UN.O.) SHALL BE PRIMED & PAINTED.
- INSTALL MATERIAL OF THE LONGEST PRACTICAL LENGTH & SIZE TO MINIMIZE THE NUMBER OF JOINTS.
- PAINTS SHALL BE A.C.C. AND MUST BE DAMP PROOF AND WAX TO ALL CHERRY TILE & COVE BASE. VERIFY WITH ARCHITECT FOR SPECIFIC REQUIREMENTS.
- THE ARCHITECT ASSUMES THE GENERAL CONTRACTOR HAS INCLUDED IN HIS BID THE HIGHEST QUALITY AND CHEAPEST MATERIALS AVAILABLE. THE ARCHITECT ASSUMES THE GENERAL CONTRACTOR HAS INCLUDED IN HIS BID THE HIGHEST QUALITY AND CHEAPEST MATERIALS AVAILABLE.
- INTERCONNECTIONS USED SHALL BE NON-COMBUSTIBLE OR FLAME PROTECTED IN AN APPROVED MANNER.
- THE CONTRACTOR SHALL PROTECT ALL ADJACENT MATERIALS AND EQUIPMENT AGAINST DAMAGE FROM SPLASH, OVERSPILL, OR OVERFLOW OF COCAINE WASH SOLUTIONS. ALL ADJACENT MATERIALS AND EQUIPMENT SHALL BE PROTECTED AND INDICATE WITH PAINTED SURFACES.
- ALL GROUT TO CONTAIN KRYTOL COGNITIVE SEALER.
- ALL FINISHES SHALL BE CLASS 'C' WITH FLAME SPROG INDEX OF 78/300 AND SMOKE DEVELOPMENT INDEX OF 6/460.




STORE #1619
3375 E. SHEA BLVD.
PHOENIX, AZ 85028

REVISIONS:
△ BUILDING COMMENTS 6.27.23

TITLE:
FLOOR FINISH
AND FINISH
SCHEDULE

DATE:
4.05.2023
PROJECT NO.
22-200
SHEET NO.


A2.2

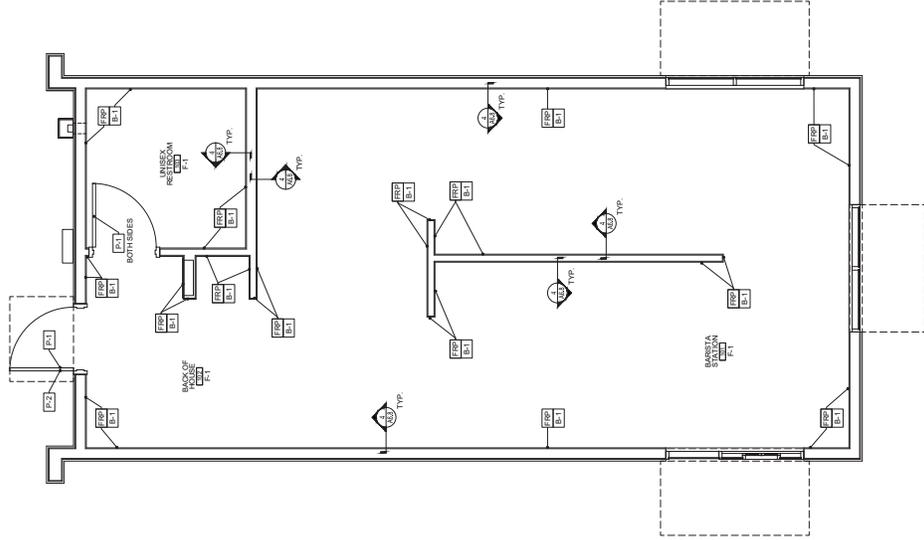

1 FINISH FLOOR PLAN
SCALE: 3/8" = 1'-0"

ROOF DRAIN CALCULATIONS

ROOF AREA 597.50 FT.²
 TOTAL AREA 758.50 FT.²
 REQUIRED: 0.75 GPM/100 SF
 PROVIDED: (1) 4" PWS 5" MAIN MAN SCUPPER OPENINGS WITH (1) 1/2" CONDUCTOR HEAD OPENINGS FOR OVERFLOW & (1) 1" PWS 5" MIN. OVERFLOW SCUPPER PROVIDED VERTICAL 1" DOWNPOUTS (100 GPM)
 NOTE: ROOF IS DESIGNED TO HOLD ANY POTENTIAL PONDING WATER IF ONE ROOF SCUPPER SHOULD BECOME CLOGGED

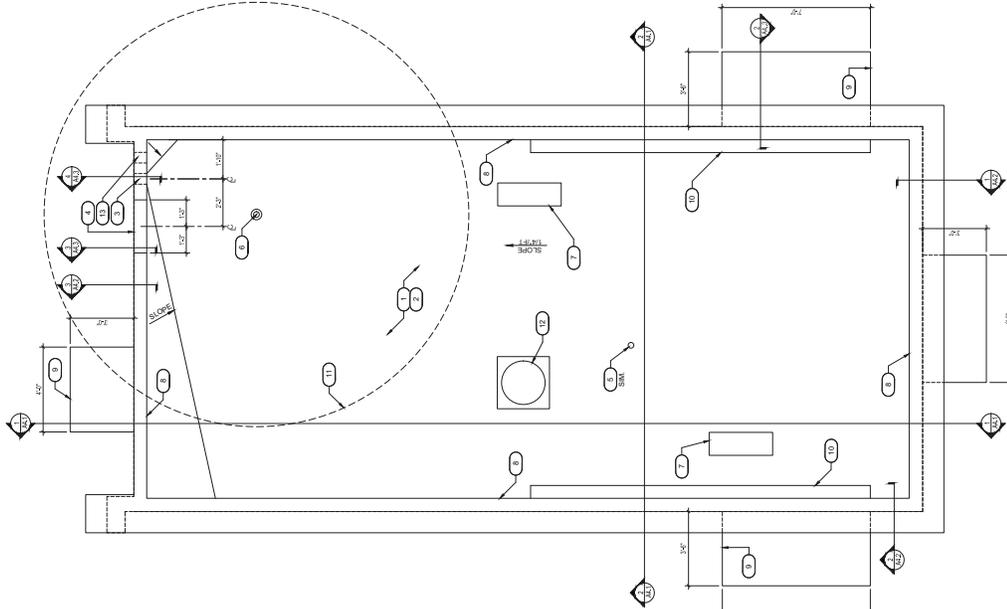

2 ROOF PLAN
 SCALE: 3/8" = 1'-0"

SYMBOL	FIXTURE	INCHES
[Symbol]	2x4 SURFACE MOUNTED LIGHT FIXTURE WITH PRISMATICS	MOUNTING - LAY-IN GRID
[Symbol]	SUPPLY AIR GRILLE	MOUNTING - LAY-IN GRID
[Symbol]	RETURN AIR	MOUNTING - LAY-IN GRID
[Symbol]	RETURN AIR	MOUNTING - RECESSED
[Symbol]	TOILET ROOM EXHAUST FAN	
[Symbol]	EXTERIOR WALL SOUNE	
[Symbol]	EXTERIOR EMERGENCY WALL SOUNE	
[Symbol]	LED EXIT SIGN	
[Symbol]	EMERGENCY LIGHT (W/LED EYE)	
[Symbol]	PERIMETER LED STRIP LIGHT	

NOTE: ALL LIGHT FIXTURES, RETURN AIR GRILLES, EXHAUST FANS, AND EMERGENCY WALL SOUNES TO BE INSTALLED BY GENERAL CONTRACTOR.

ITEM	TYPE 'X'	MFR (OR EQUAL)	MODEL NUMBER
[Symbol]	ARMSTRONG		24" x 48" HANTRONS KITCHEN ZONE OR EQUAL TILES TO BE SMOOTH AND WASHABLE

GENERAL NOTES

- WHERE LIGHT FIXTURES ARE INDICATED IN LAY-IN CEILINGS PROVIDE A MINIMUM OF 2" SUPPORT WIRE. SUPPORT WIRES SHALL BE A MINIMUM OF 1/2" GAUGE GALVANIZED STEEL WIRE, SOFT ANNEALED.
- FIXTURES ARE REQUIRED AT ALL LIGHTING OUTLETS SHOWN ON THE DRAWINGS. APPROVED WIRING IS REQUIRED FOR EXTERIOR FIXTURES. ALL WIRING OF FIXTURES AND WIRING SHALL BE IN ACCORDANCE WITH NECESSARY REQUIREMENTS.
- ALL FIXTURES SHALL CARRY 'UL' AND 'ETL' LABELS. ALL FLUORESCENT FIXTURE BALLASTS SHALL BE 20% OVER THE NUMBER OF LAMPS CONNECTED TO EACH BALLAST AND SHALL HAVE ALL FLUORESCENT BALLASTS SHALL HAVE AN INHERENT INUSE RATING OF CLASS 'A' OR BETTER. PRIMARY WIRING SHALL HAVE A POWER FACTOR GREATER THAN 0.9 WHEN USED WITH FLUORESCENT BALLASTS.
- REFER TO SPECIFICATIONS FOR ROOF ASSEMBLY.

CEILING SPECIFICATION
 ADDITIONAL CEILING SYSTEM SHALL INCLUDE: A. 1/2" EXPOSED TIE GRID SYSTEM OR EQUIVALENT AND INSTALL PER ICC 1000 ANCHORAGE
 HANGER WIRE, MINIMUM 1/2" GA. AVG GALVANIZED SOFT ANNEALED, MILD STEEL WIRE.
 HANGER CLIPS, PREFABRICATED METAL CLIPS, EYELET SCREWING FOR FASTENING TO STRUCTURAL WOOD MEMBERS.
 ADDITIONAL CEILING TILE:
 200X200X1/2" TO BE SMOOTH AND WASHABLE

KEYNOTES - REFLECTED CEILING

- NEW 2x4 WASHABLE LAY-IN CEILING TILES (FIRE RATING - CLASS A)
- RED CANVAS AWNING FURNISHED AND INSTALLED BY OTHERS
- PERIMETER LED AT EXTERIOR SOFFIT
- BROOK METAL SPLIT & CORNER
- 24" x 36" GRATING FOR HOT WATER HEATER
- EXTERIOR LIGHTING SEE ELEVATIONS. SEE ALSO ELECTRICAL DRAWINGS.
- ART HANDLING UNIT ABOVE CEILING. SEE MECHANICAL DRAWINGS

KEYNOTES - ROOF

- 60#B, TPO FULLY ADHERED OVER 1/2" INSULATION OVER PWS. VIBROCHARMURE INSULATION PER BUILDING SECTION OVER SHEATHING. SEE DETAIL A4.1
- CONTRACTOR ALTERNATIVE AS ALLOWED BY CODE SHALL BE TPO FULLY ADHERED OVER 1/2" INSULATION OVER SHEATHING. SEE DETAIL A4.2
- 4" x 6" FIN FIBER WALL ROOF SCUPPER. SEE DETAIL B4.3
- OPENING IN PARAPET FOR ROOF ACCESS
- VENT. SEE PLUMBING DRAWINGS. SEE ALSO DETAIL Z4.4
- 6" GOOSENECK FOR EXHAUST. SEE DETAIL Z4.4 S.M.
- CONDENSING UNIT ATTACHED TO RED WOOD SLEEPER. SEE MECHANICAL DRAWINGS
- PREF FINISHED METAL PAMPET CAP
- RED CANVAS AWNING BELOW. FURNISHED AND INSTALLED BY OTHERS
- CONDENSING UNIT ATTACHED TO RED WOOD SLEEPER FOR SOUNE ON SIDE OF PARAPET WALL - SOUNE UNDER SEPARATE PERMIT
- PER CODE - NO AIR INTAKES MAY BE WITHIN A 10' RADIUS OF A VENT OR EXHAUST.
- REMOTE CONDENSER FOR ICE MAKER. SEE KITCHEN DRAWINGS.
- 4" x 6" FIN OVERFLOW SCUPPER, BOTTOM OF SCUPPER 2" ABOVE BOTTOM OF MAIN SCUPPER



1 REFLECTED CEILING PLAN
 SCALE: 3/8" = 1'-0"



1974 N. 77th ST., STE 100
 SCOTTSDALE, AZ 85260



STORE #1619
 3375 E. SHEA BLVD.
 PHOENIX, AZ 85028

REVISIONS:
 BUILDING COMMENTS 6.27.23

TITLE:
 REFLECTED CEILING PLAN & ROOF PLAN

DATE:
 4.05.2023
 PROJECT NO.
 22-200
 SHEET NO.

A2.4