

Neighborhood Center

The table below summarizes the Neighborhood Center in the Bells Ferry LCI Study Area.


SUMMARY TABLE NC

BUILDING FUNCTION (see Tables 10 & 11)	
a. Residential	open use
b. Lodging	open use
c. Office	open use
d. Retail	open use
BUILDING HEIGHT (see Table 8)	
a. Principal Building	6 stories max. 2 min.
b. Outbuilding	2 stories max.
LOT OCCUPATION	
a. Lot Width	18 ft min 180 ft max
b. Lot Coverage	80% max
BUILDING TYPE (see Table 9)	
a. Edgeyard	prohibited
b. Sideyard	permitted
c. Rearyard	permitted
d. Courtyard	permitted
BUILDING DISPOSITION	
a. Front Setback	0 ft. min. 12 ft. max.
b. Side Setback	0 ft. min. 24 ft. max.
c. Rear Setback	3 ft. min.*
d. Frontage Buildout	70% min at setback
OUTBUILDING DISPOSITION	
a. Front Setback	40 ft. max. from rear prop.
b. Side Setback	0 ft. min.*
c. Rear Setback	3 ft. max.
PRIVATE FRONTAGES (see Table 7)	
a. Common Lawn	prohibited
b. Porch & Fence	prohibited
c. Terrace or L.C.	permitted
d. Forecourt	permitted
e. Sloop	permitted
f. Shopfront & Awning	permitted
g. Gallery	permitted
h. Arcade	permitted
Refer to Summary Table 14	
PARKING PROVISIONS	
See Tables 11 & 12	

* or 15 ft. from center line of alley


BUILDING HEIGHT

1. Building height shall be measured in number of stories, excluding a raised basement, or inhabited attic.
2. Each story shall not exceed 14 ft. clear, floor to ceiling.
3. Maximum height shall be measured to the eave or roof deck.




BUILDING DISPOSITION

1. The facades and elevations of a building shall be distanced from the frontage and lot lines as shown.
2. Buildings shall have facades along the principal frontage lines and elevations along lot lines (see Table 16E).

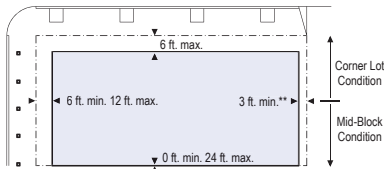

OUTBUILDING DISPOSITION

1. The elevations of the out buildings shall be distances from the lot lines as shown.

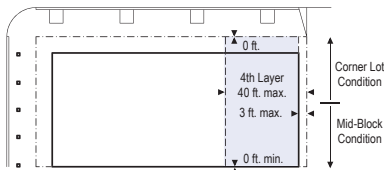

PARKING PROVISIONS

1. Uncovered parking spaces may be provided within the 3rd Layer as shown in the diagram (see Table 16D).
2. Covered parking shall be provided within the 3rd Layer as shown in the diagram (see Table 16D).
3. Trash containers shall be stored within the 3rd Layer as shown in the diagram (see Table 16D).

