


THE OWNER HAS CONTROL OF ALL OPERATIONS AND SHALL ACCEPT OR REJECT THE WORK. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONSTRUCTION QUALITY, SAFETY, AND PERFORMANCE OF THE PROJECT. THE CONTRACTOR SHALL PROTECT ALL EXISTING UTILITIES AND STRUCTURES ON THE SITE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE LOCAL AND STATE AUTHORITIES.

**INTERIOR WALL TYPE KEY**

(Symbol)	EXISTING INTERIOR WALL CONSTRUCTION
(Symbol)	NEW INTERIOR WALL CONSTRUCTION
(Symbol)	EXISTING WALL TO BE DEMOLISHED

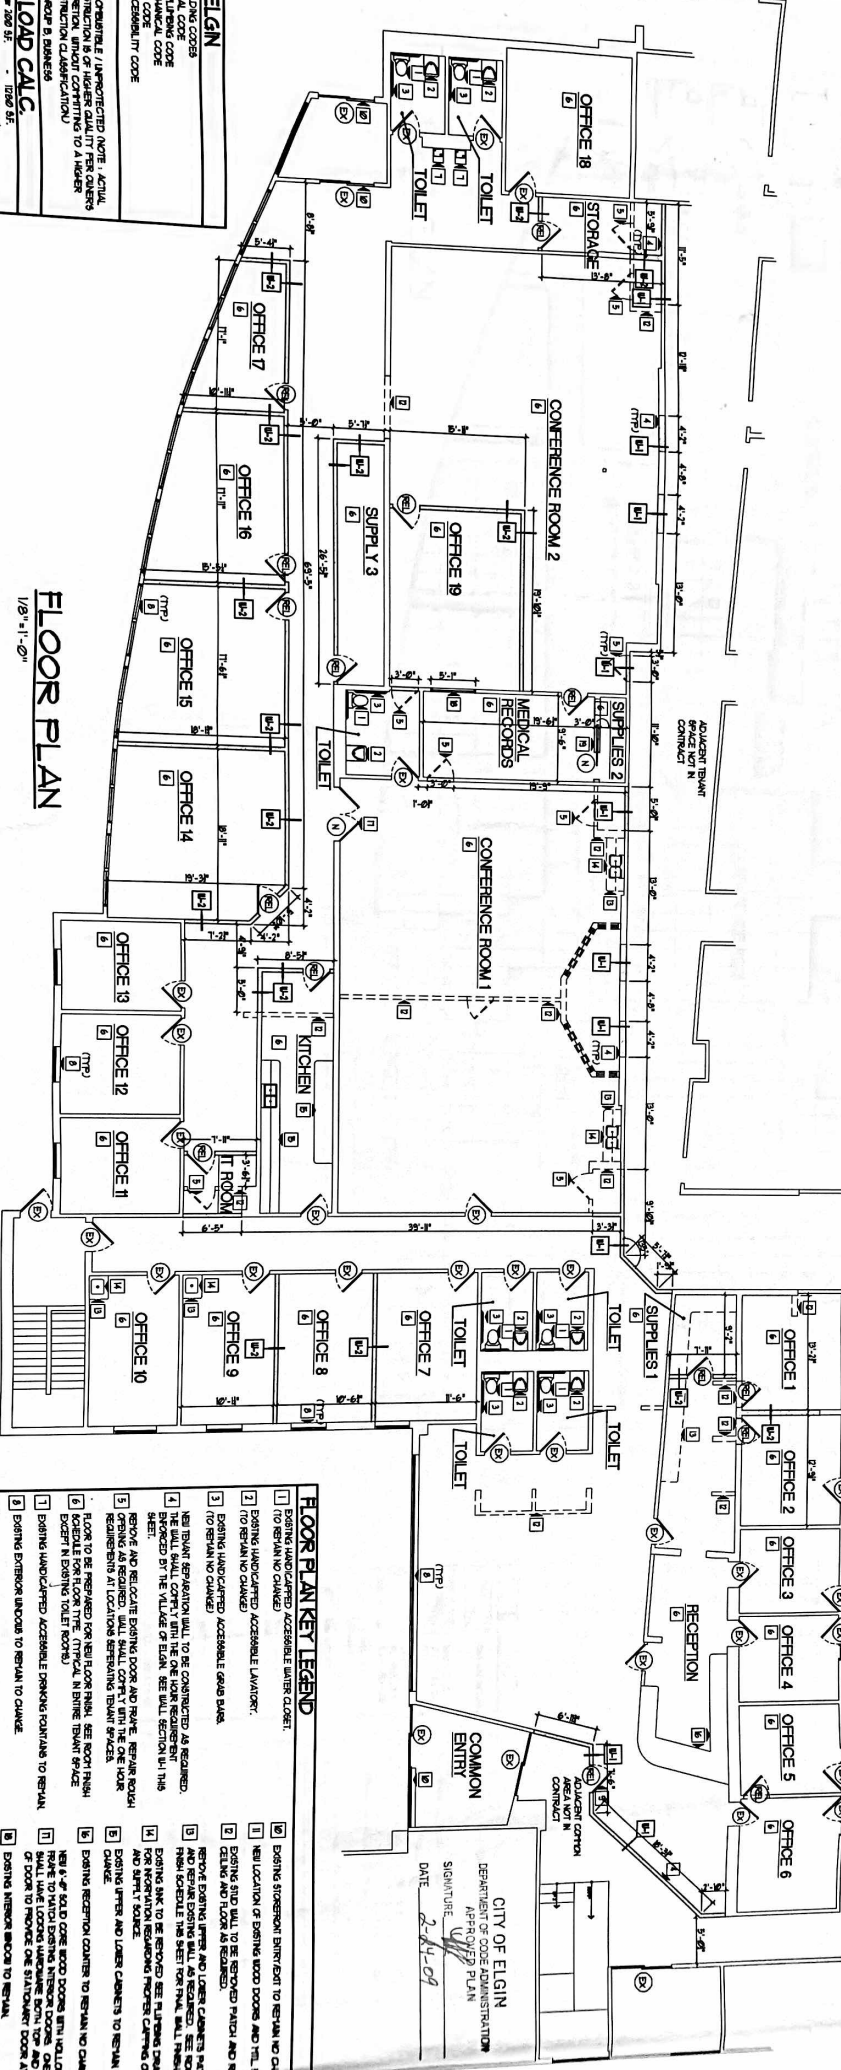

- FLOOR PLAN KEY LEGEND**
- EXISTING UNDOORCRAFTED ACCESSIBLE ENTRY CLOSET: (TO REMAIN UNCHANGED)
  - EXISTING UNDOORCRAFTED ACCESSIBLE LAVATORY: (TO REMAIN UNCHANGED)
  - EXISTING UNDOORCRAFTED ACCESSIBLE SINGLE SINK: (TO REMAIN UNCHANGED)
  - NEW UNDOORCRAFTED WALL TO BE CONSTRUCTED AS REQUIRED. REMOVE AND RELOCATE EXISTING DOOR AND FRAME. REPAIR ROUGH OPENING AS REQUIRED. WALL SHALL COVER UP TO THE ONE HOUR RESISTANCE AT LOCATIONS SEPARATING FROM OTHER SHEET.
  - REMOVE AND RELOCATE EXISTING DOOR AND FRAME. REPAIR ROUGH OPENING AS REQUIRED. WALL SHALL COVER UP TO THE ONE HOUR RESISTANCE AT LOCATIONS SEPARATING FROM OTHER SHEET.
  - REMOVE DOOR FRAME AND LOWER CABINET'S MATCH FRAME FOR SETBACK THE SHEET FOR FINAL WALL. SEE ROOF SHEET FOR INFORMATION REGARDING ROOFING CARROLLING OF DOOR TO REMOVE ONE STAIRWAY DOOR AT A CHANGE.
  - EXISTING RECEPTION COUNTER TO REMAIN UNCHANGED.
  - NEW 4'-0" WIDE CORNER BOSS DOORS WITH HOLD UP FRAME TO MATCH EXISTING INTERIOR CORNER TOP AND BOTTOM DOOR TO REMOVE ONE STAIRWAY DOOR AT A CHANGE.
  - EXISTING INTERIOR DOOR TO REMAIN.
  - NEW 3'-0" x 4'-0" BOSS PROJECT DOOR.
  - EXISTING EXTERIOR UNDOORCRAFTED ACCESSIBLE ENTRY CLOSET: (TO REMAIN UNCHANGED)
  - EXISTING UNDOORCRAFTED ACCESSIBLE LAVATORY: (TO REMAIN UNCHANGED)
  - EXISTING UNDOORCRAFTED ACCESSIBLE SINGLE SINK: (TO REMAIN UNCHANGED)
  - NEW UNDOORCRAFTED WALL TO BE CONSTRUCTED AS REQUIRED. REMOVE AND RELOCATE EXISTING DOOR AND FRAME. REPAIR ROUGH OPENING AS REQUIRED. WALL SHALL COVER UP TO THE ONE HOUR RESISTANCE AT LOCATIONS SEPARATING FROM OTHER SHEET.
  - REMOVE DOOR FRAME AND LOWER CABINET'S MATCH FRAME FOR SETBACK THE SHEET FOR FINAL WALL. SEE ROOF SHEET FOR INFORMATION REGARDING ROOFING CARROLLING OF DOOR TO REMOVE ONE STAIRWAY DOOR AT A CHANGE.
  - EXISTING RECEPTION COUNTER TO REMAIN UNCHANGED.
  - NEW 4'-0" WIDE CORNER BOSS DOORS WITH HOLD UP FRAME TO MATCH EXISTING INTERIOR CORNER TOP AND BOTTOM DOOR TO REMOVE ONE STAIRWAY DOOR AT A CHANGE.
  - EXISTING INTERIOR DOOR TO REMAIN.
  - NEW 3'-0" x 4'-0" BOSS PROJECT DOOR.

CITY OF ELGIN  
 DEPARTMENT OF CODE ADMINISTRATION  
 APPROVED PLAN  
 SIGNATURE: [Signature]  
 DATE: 2-24-09

**ELGIN**

1. CONTINUABLE / UNPROTECTED NOTE: ACTUAL CONSTRUCTION IS OF HIGHER QUALITY PER OWNER'S INTENTION. UNDOORCRAFTED ACCESSIBLE ENTRY CLOSET AND LAVATORY.
2. EXISTING UNDOORCRAFTED ACCESSIBLE ENTRY CLOSET AND LAVATORY.
3. EXISTING UNDOORCRAFTED ACCESSIBLE SINGLE SINK.
4. NEW UNDOORCRAFTED WALL TO BE CONSTRUCTED AS REQUIRED. REMOVE AND RELOCATE EXISTING DOOR AND FRAME. REPAIR ROUGH OPENING AS REQUIRED. WALL SHALL COVER UP TO THE ONE HOUR RESISTANCE AT LOCATIONS SEPARATING FROM OTHER SHEET.
5. REMOVE AND RELOCATE EXISTING DOOR AND FRAME. REPAIR ROUGH OPENING AS REQUIRED. WALL SHALL COVER UP TO THE ONE HOUR RESISTANCE AT LOCATIONS SEPARATING FROM OTHER SHEET.
6. REMOVE DOOR FRAME AND LOWER CABINET'S MATCH FRAME FOR SETBACK THE SHEET FOR FINAL WALL. SEE ROOF SHEET FOR INFORMATION REGARDING ROOFING CARROLLING OF DOOR TO REMOVE ONE STAIRWAY DOOR AT A CHANGE.
7. EXISTING RECEPTION COUNTER TO REMAIN UNCHANGED.
8. NEW 4'-0" WIDE CORNER BOSS DOORS WITH HOLD UP FRAME TO MATCH EXISTING INTERIOR CORNER TOP AND BOTTOM DOOR TO REMOVE ONE STAIRWAY DOOR AT A CHANGE.
9. EXISTING INTERIOR DOOR TO REMAIN.
10. NEW 3'-0" x 4'-0" BOSS PROJECT DOOR.

**LOAD CALC.**

1/8" = 1'-0"

**FLOOR PLAN**