




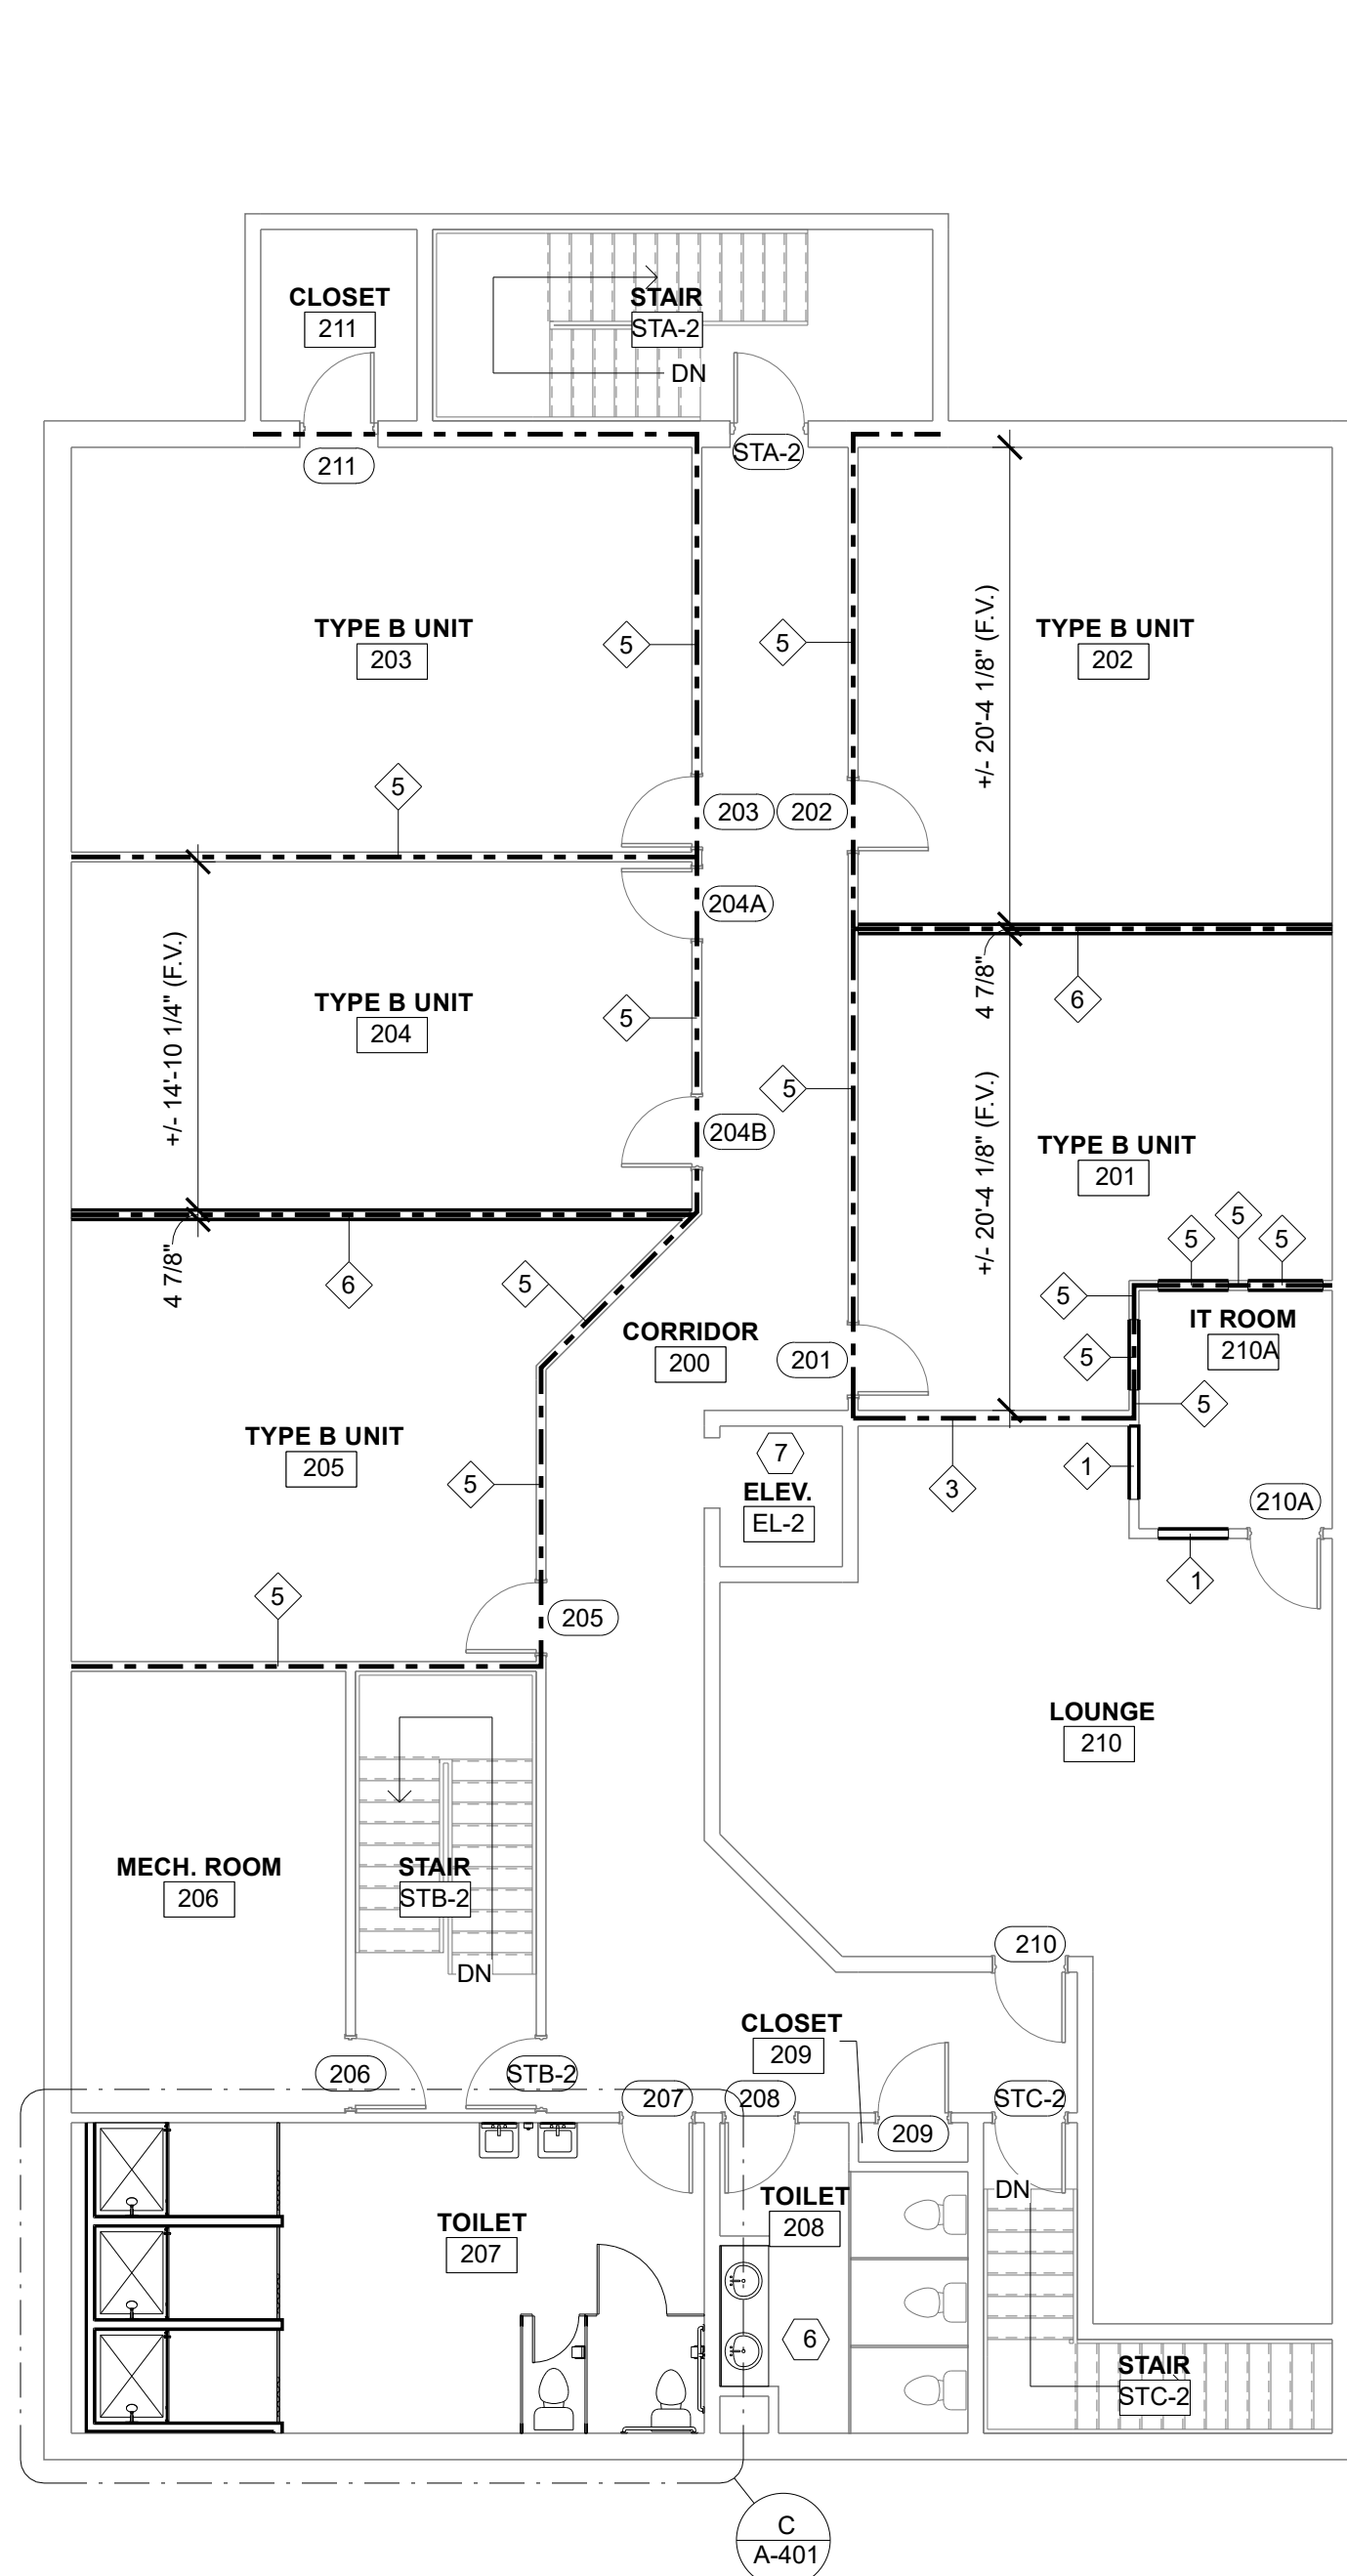

A SECOND FLOOR PLAN - RECOVERY BUILDING
1/8" = 1'-0"

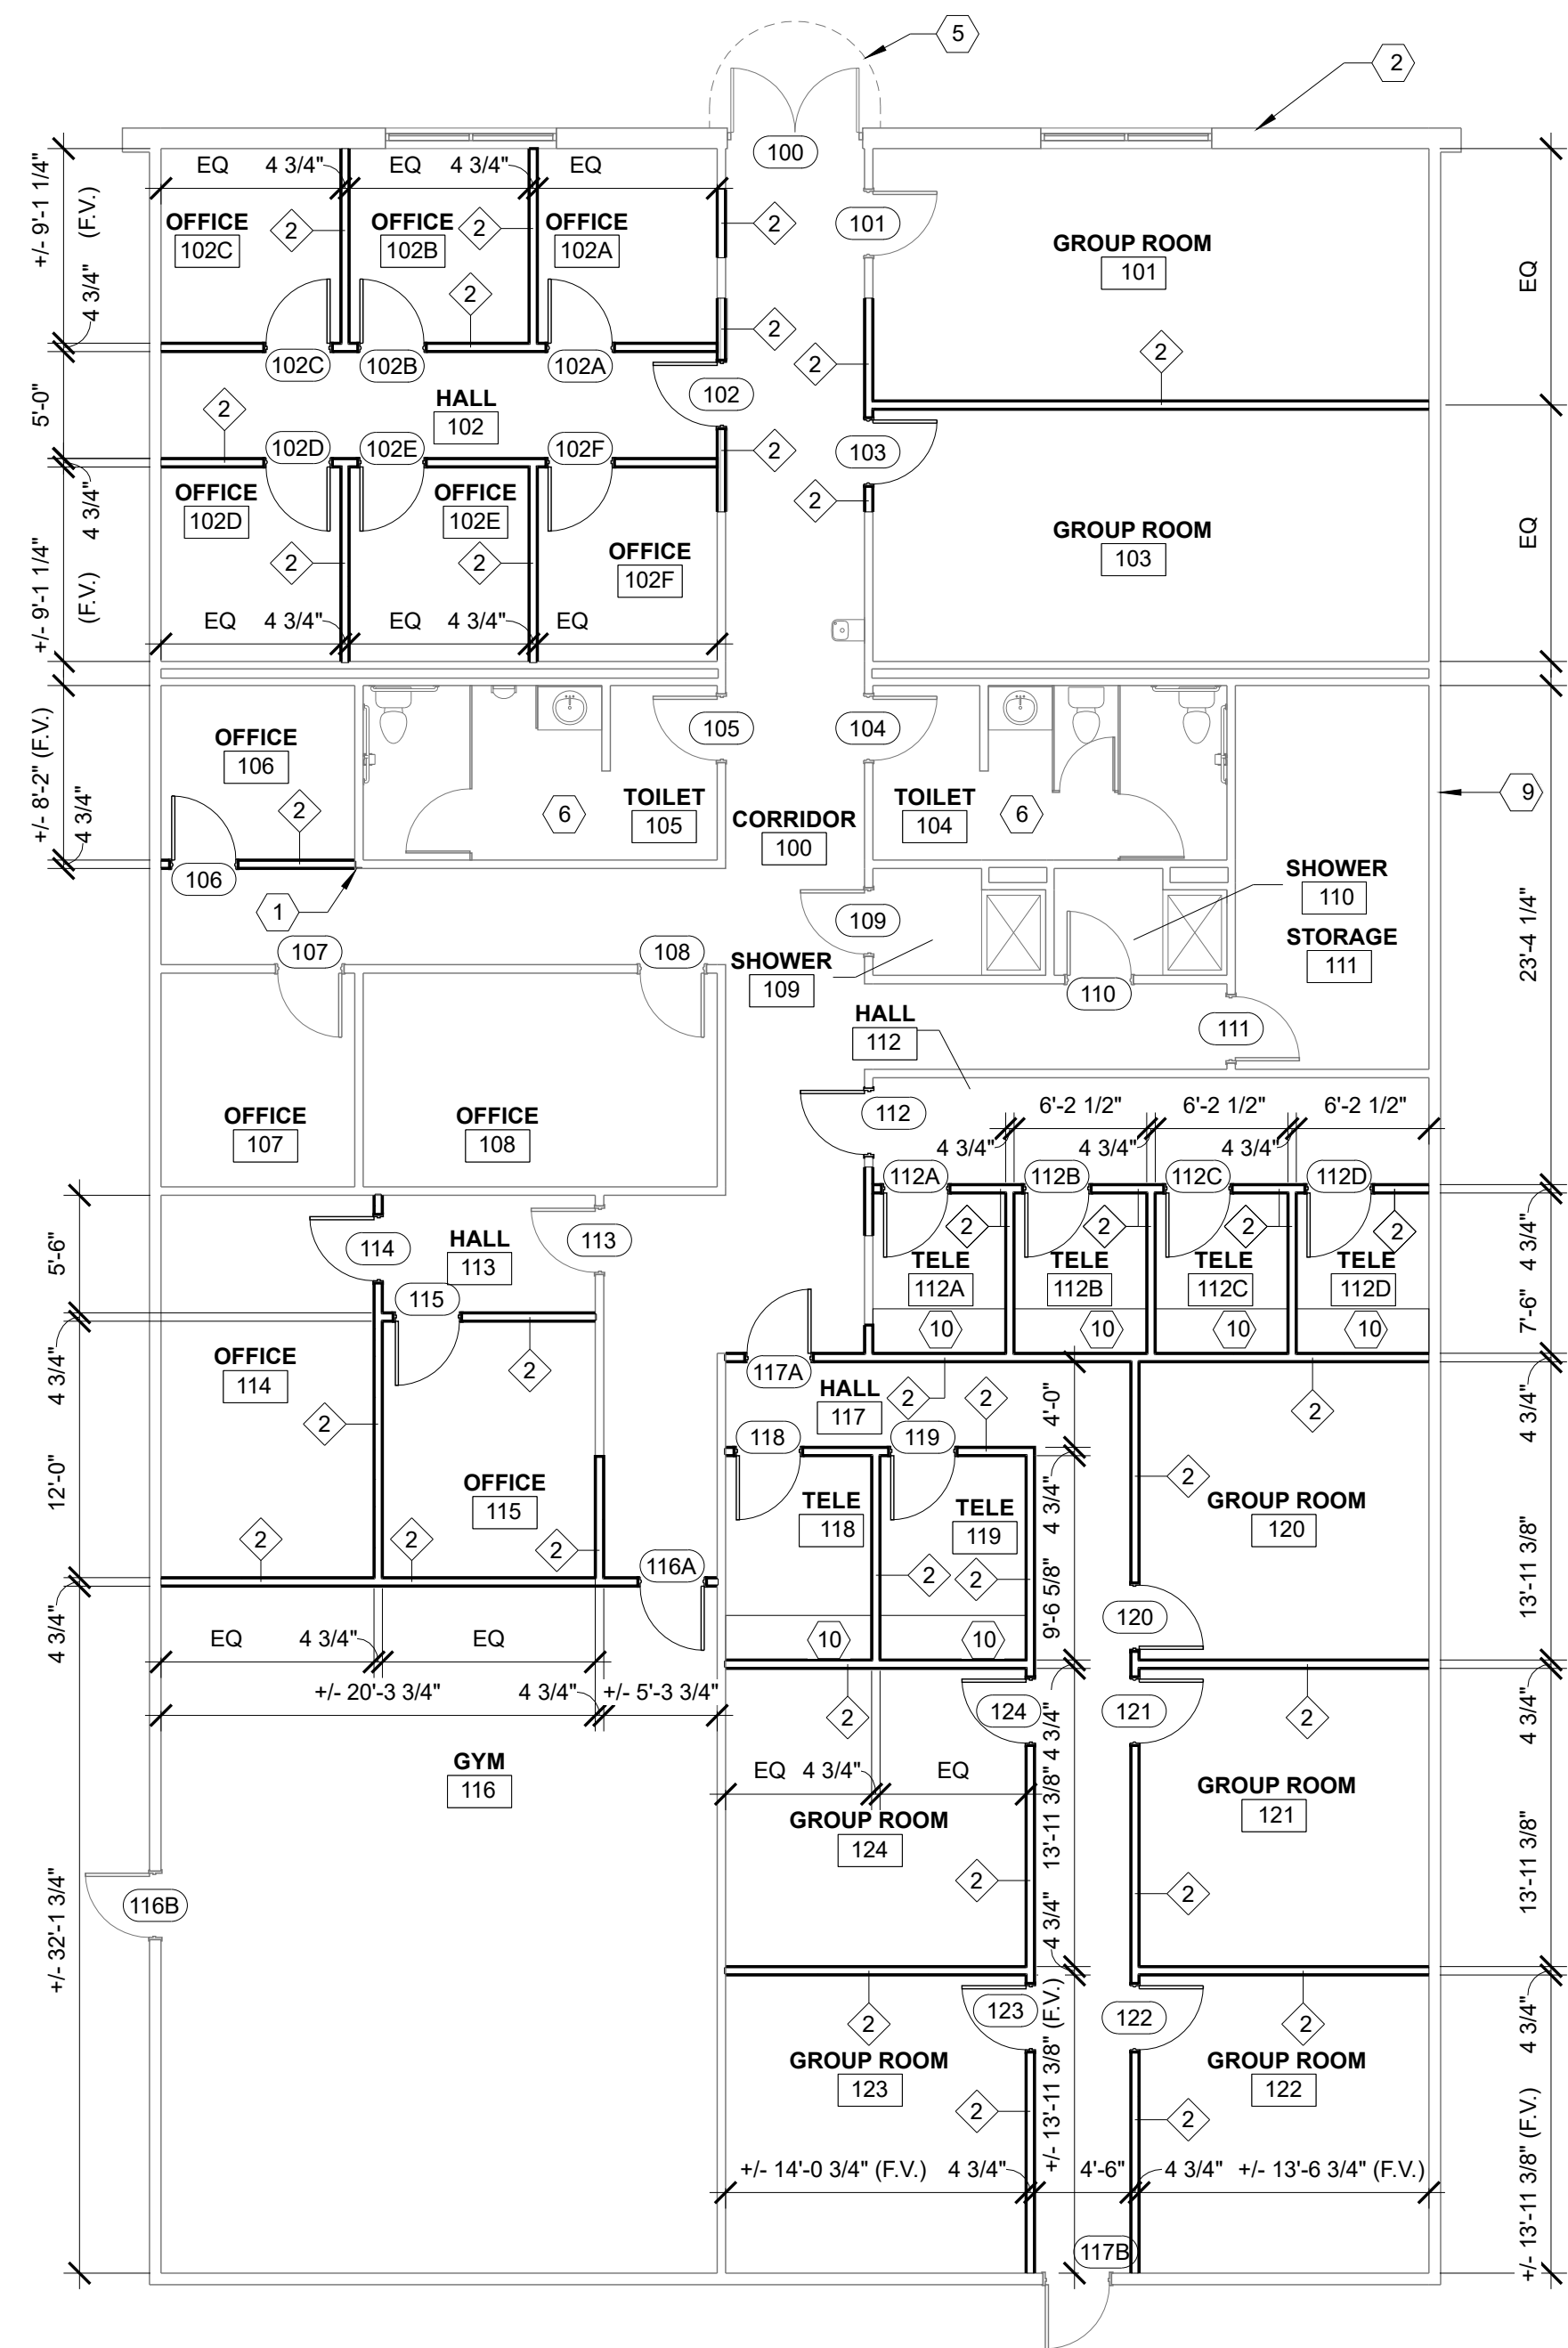

B FIRST FLOOR PLAN - SERVICES BUILDING
1/8" = 1'-0"

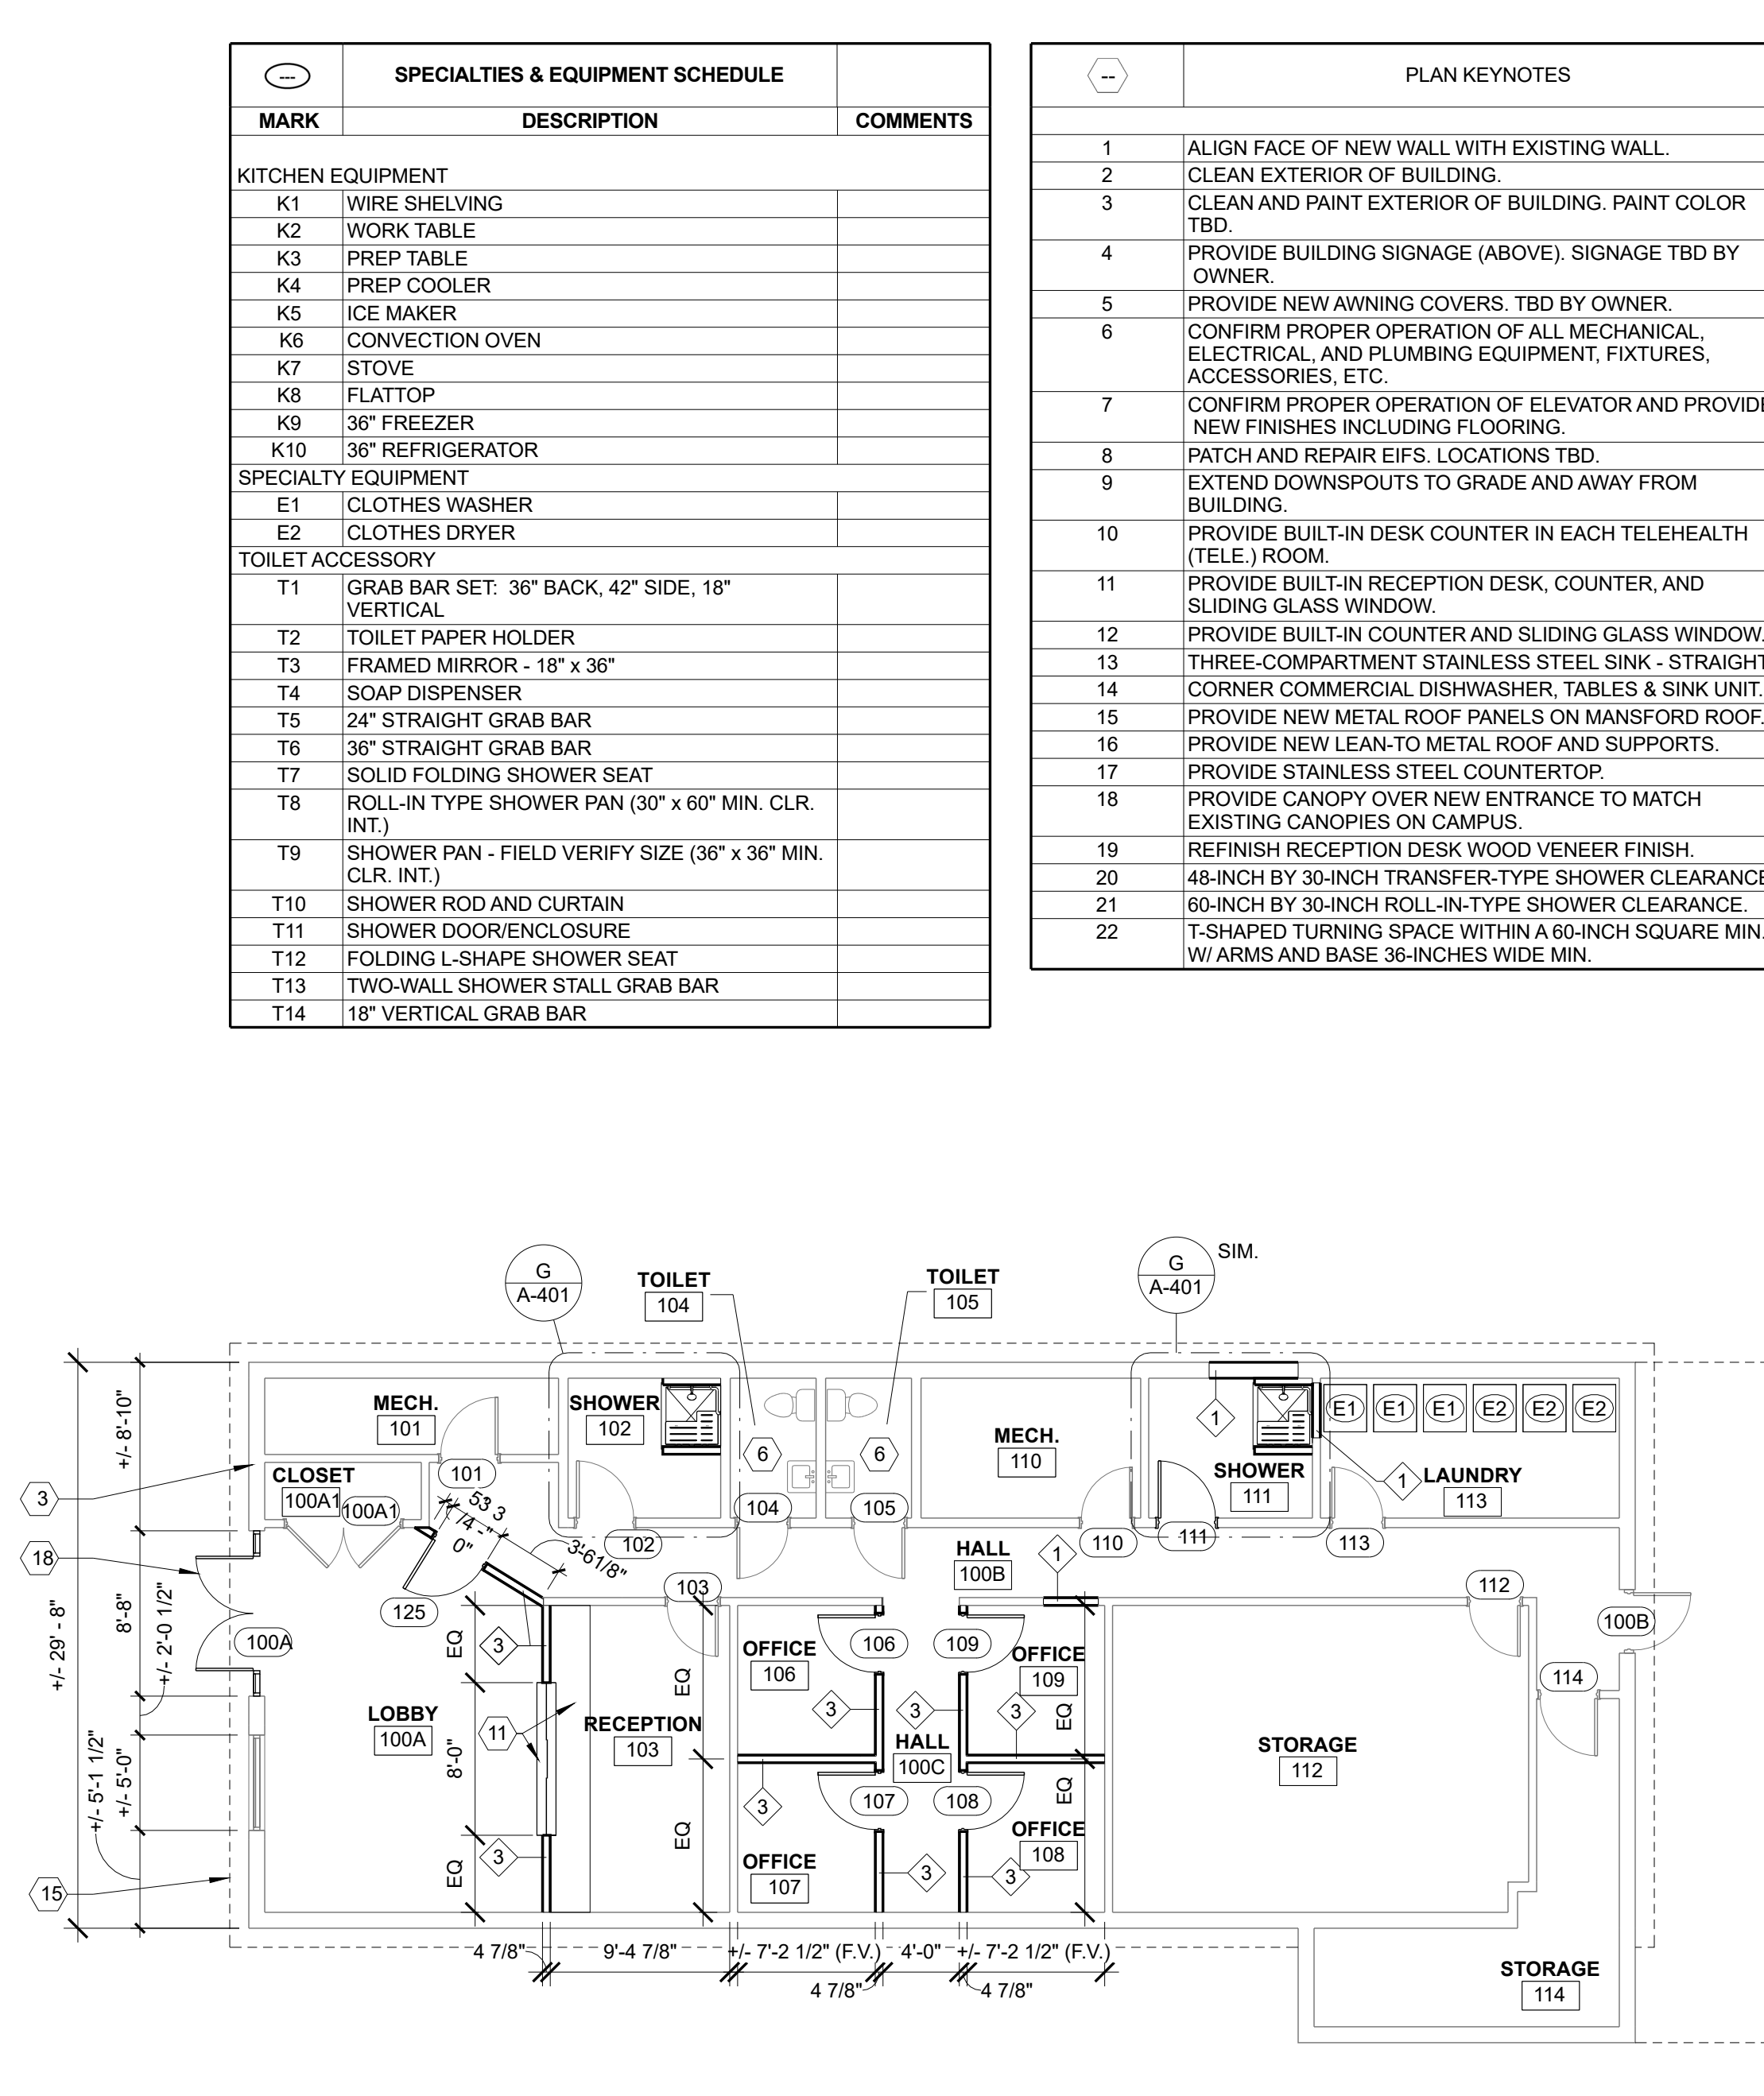


C FIRST FLOOR PLAN - INTAKE BUILDING
1/8" = 1'-0"

MARK	SPECIALTIES & EQUIPMENT SCHEDULE	DESCRIPTION	COMMENTS
K1	KITCHEN EQUIPMENT	WIRE SHELVING	
K2		WORK TABLE	
K3		PREP TABLE	
K4		PREP COOLER	
K5		ICE MAKER	
K6		CONVECTION OVEN	
K7		STOVE	
K8		FLATTOP	
K9		36" FREEZER	
K10		36" REFRIGERATOR	
E1	SPECIALTY EQUIPMENT	CLOTHES WASHER	
E2		CLOTHES DRYER	
T1	TOILET ACCESSORY	GRAB BAR SET, 36" BACK, 42" SIDE, 18" VERTICAL	
T2		TOILET PAPER HOLDER	
T3		FRAMED MIRROR - 18" x 36"	
T4		SOAP DISPENSER	
T5		24" STRAIGHT GRAB BAR	
T6		36" STRAIGHT GRAB BAR	
T7		SOLID FOLDING SHOWER SEAT	
T8		ROLL-IN TYPE SHOWER PAN (30" x 60" MIN. CLR. INT.)	
T9		SHOWER PAN - FIELD VERIFY SIZE (36" x 36" MIN. CLR. INT.)	
T10		SHOWER ROD AND CURTAIN	
T11		SHOWER DOOR/ENCLOSURE	
T12		FOLDING L-SHAPE SHOWER SEAT	
T13		TWO-WALL SHOWER STALL GRAB BAR	
T14		18" VERTICAL GRAB BAR	

PLAN KEYNOTES
1. ALIGN FACE OF NEW WALL WITH EXISTING WALL.
2. CLEAN EXTERIOR OF BUILDING.
3. CLEAN AND PAINT EXTERIOR OF BUILDING. PAINT COLOR TBD.
4. PROVIDE BUILDING SIGNAGE (ABOVE). SIGNAGE TBD BY OWNER.
5. PROVIDE NEW AWNING COVERS. TBD BY OWNER.
6. CONFIRM PROPER OPERATION OF ALL MECHANICAL, ELECTRICAL, AND PLUMBING EQUIPMENT, FIXTURES, ACCESSORIES, ETC.
7. CONFIRM PROPER OPERATION OF ELEVATOR AND PROVIDE NEW FINISHES INCLUDING FLOORING.
8. PATCH AND REPAIR EIFS LOCATIONS TBD.
9. EXTEND DOWNSPOUTS TO GRADE AND AWAY FROM BUILDING.
10. PROVIDE BUILT-IN DESK COUNTER IN EACH TELEHEALTH (TELE) ROOM.
11. PROVIDE BUILT-IN RECEPTION DESK, COUNTER, AND SLIDING GLASS WINDOW.
12. PROVIDE BUILT-IN COUNTER AND SLIDING GLASS WINDOW.
13. THREE-COMPARTMENT STAINLESS STEEL SINK - STRAIGHT.
14. CORNER COMMERCIAL DISHWASHER, TABLES & SINK UNIT.
15. PROVIDE NEW METAL ROOF PANELS ON MANSFORD ROOF.
16. PROVIDE NEW LEAN-TO METAL ROOF AND SUPPORTS.
17. PROVIDE STAINLESS STEEL COUNTERTOP.
18. PROVIDE CANOPY OVER NEW ENTRANCE TO MATCH EXISTING CANOPIES ON CAMPUS.
19. REFINISH RECEPTION DESK WOOD VENEER FINISH.
20. 46-INCH BY 30-INCH TRANSFER-TYPE SHOWER CLEARANCE.
21. 60-INCH BY 30-INCH ROLL-IN-TYPE SHOWER CLEARANCE.
22. T-SHAPED TURNING SPACE WITHIN A 60-INCH SQUARE MIN. W/ ARMS AND BASE 36-INCHES WIDE MIN.

- GENERAL NOTES - ARCHITECTURAL
- DIMENSIONS TO EXISTING CONSTRUCTION ARE TO FINISHED SURFACE. DIMENSIONS TO NEW CONSTRUCTION ARE TO STRUCTURAL CENTERLINE. FACE OF CONCRETE OR MASONRY CONSTRUCTION, OR TO FINISH FACE OF FRAMED MEMBERS UNLESS NOTED OTHERWISE. FIELD VERIFY ALL CONDITIONS AND DIMENSIONS PRIOR TO STARTING WORK AND NOTIFY ARCHITECT IMMEDIATELY IF DISCREPANCIES ARE FOUND BETWEEN CONTRACT DOCUMENTS AND ACTUAL FIELD CONDITIONS.
 - WHERE A FIXED DIMENSION IS SHOWN ON AN ACCESSIBLE FIXTURE OR ACCESSORY, THAT ITEM SHALL BE INSTALLED EXACTLY AS DIMENSIONED. REFER TO THE ACCESSORY MOUNTING LEGEND FOR MOUNTING HEIGHTS.
 - LOCATE INSIDE FACE OF DOOR FRAME JAMBS 6 INCHES FROM FINISH FACE OF ADJACENT WALLS UNLESS NOTED OTHERWISE.
 - COORDINATE EQUIPMENT WORK WITH MANUFACTURERS AND SUPPLIERS TO INSURE PROPER ROUGH-IN CLEARANCES FOR INSTALLATION, USE AND MAINTENANCE.
 - PROTECT EXISTING SURFACES TO REMAIN THAT ARE NOT INCLUDED IN SCOPE OF WORK BUT THAT ARE WITHIN AREAS OF CONSTRUCTION ACTIVITY.
 - PATCH, REPAIR AND RESTORE EXISTING FINISHES AND SURFACES TO "AS NEW CONDITION" AS REQUIRED TO MATCH SURROUNDING MATERIALS OR TO PROVIDE APPROPRIATE SUBSTRATE PRIOR TO INSTALLING NEW FINISHES. AREAS NOTED TO BE PATCHED OR REPAIRED ON THE DRAWINGS ARE GIVEN FOR REFERENCE AND SHALL NOT BE INTERPRETED TO LIMIT THE SCOPE OF WORK.
 - VERTICAL COURSING FOR NEW MASONRY WALL CONSTRUCTION SHALL EQUAL EIGHT INCHES (8") FOR ONE CONCRETE MASONRY UNIT PLUS ONE MORTAR JOINT AND THREE BRICK COURSES PLUS THREE MORTAR JOINTS, UNLESS NOTED OTHERWISE.
 - TOOTH NEW MASONRY INTO EVERY OTHER COURSE OF EXISTING MASONRY UNLESS OTHERWISE INDICATED. PROVIDE HORIZONTAL ANCHORS BETWEEN NEW AND EXISTING MASONRY AT CONDITIONS THAT PROHIBIT TOOTHED-TYPE CONSTRUCTION. HORIZONTAL JOINTS OF NEW MASONRY SHALL MATCH EXISTING UNLESS OTHERWISE INDICATED. NEW MASONRY BOND SHALL MATCH EXISTING UNLESS OTHERWISE INDICATED.
 - PROVIDE CONTROL JOINTS (C.J.) IN GYPSUM BOARD WALL CONSTRUCTION AS INDICATED. WHERE NOT SHOWN, PROVIDE MAXIMUM SPACING BETWEEN JOINTS OF 30'-0". VERIFY FINAL CONTROL JOINT LOCATIONS WHETHER OR NOT INDICATED ON THE DRAWINGS WITH ARCHITECT PRIOR TO STARTING WORK.
 - INTERIOR STUD SPACING SHALL BE MAXIMUM 16" ON CENTER UNLESS NOTED OTHERWISE.
 - PROVIDE MOLD AND MOISTURE RESISTANT GYPSUM BOARD ON ALL INTERIOR FACE OF EXTERIOR WALLS, WALLS WITH OPERABLE PLUMBING FIXTURES, AND WALLS WITHIN 4'-0" OF DRINKING FOUNTAINS OR WATER COOLERS.
 - VERIFY MOUNTING HEIGHTS OF ACCESSORIES, EQUIPMENT, DOOR HARDWARE, CASEWORK, ETC., AND PROVIDE SOLID 2X SUPPORT WOOD BLOCKING FASTENED TO FRAMING MEMBERS AS REQUIRED TO SUPPORT WEIGHT AND USE OF ITEMS. WHERE MOUNTING HEIGHTS ARE NOT INDICATED, MOUNT ITEMS IN ACCORDANCE WITH RECOGNIZED INDUSTRY STANDARDS. COORDINATE LOCATIONS WITH MANUFACTURER OR SUPPLIER AND REFER MOUNTING HEIGHT QUESTIONS TO ARCHITECT FOR INTERPRETATION.
 - PROVIDE SEALANT BETWEEN HOLLOW METAL FRAME PERIMETERS AND SURROUNDING WALL CONSTRUCTION UNLESS OTHERWISE INDICATED.
 - PROVIDE SEALANT BETWEEN INTERIOR AND EXTERIOR WINDOW AND STOREFRONT FRAME PERIMETERS AND SURROUNDING CONSTRUCTION UNLESS OTHERWISE INDICATED.
 - PROVIDE SEALANT BETWEEN DISSIMILAR MATERIALS SUCH AS GYPSUM BOARD AND MASONRY, MASONRY AND CONCRETE, COUNTERTOPS AND WALLS, ETC.
 - REPAIR AND PATCH SPRAYED FIRE-RESISTIVE AND FIRESTOP MATERIALS WHERE DAMAGED DUE TO INSTALLATION OF NEW MATERIALS TO RESTORE SPECIFIED FIRE RATING.
 - DO NOT BEGIN WORK THAT MAY REQUIRE COORDINATION, SUCH AS CEILING INSTALLATION, PRIOR TO FINAL SUBMITTAL OF MECHANICAL AND ELECTRICAL COORDINATION DRAWINGS TO ARCHITECT NOR PRIOR TO RESOLUTION AND APPROVAL OF COORDINATION ISSUES.
 - PRESSURE WASH EXTERIOR OF ALL BUILDINGS.
 - EVALUATE EXISTING CONDITION OF EIFS COLUMNS. DETERMINE CONDITION WITH PROPERTY OWNER AND TENANT IF REPAIRS ARE REQUIRED.
 - ENSURE FUNCTIONALITY OF ALL EXTERIOR LIGHTS.
 - ENSURE PROPER OPERATION OF ALL PLUMBING AND MECHANICAL SYSTEMS.
 - COORDINATE CLEANING WITH PROPERTY OWNER.

RATED WALL LEGEND
1-HOUR FIRE BARRIER UL DESIGN NO. U419 OR EQUIVALENT FOR WALL ASSEMBLY TYPE
2-HOUR FIRE BARRIER UL DESIGN NO. U419 OR EQUIVALENT FOR WALL ASSEMBLY TYPE

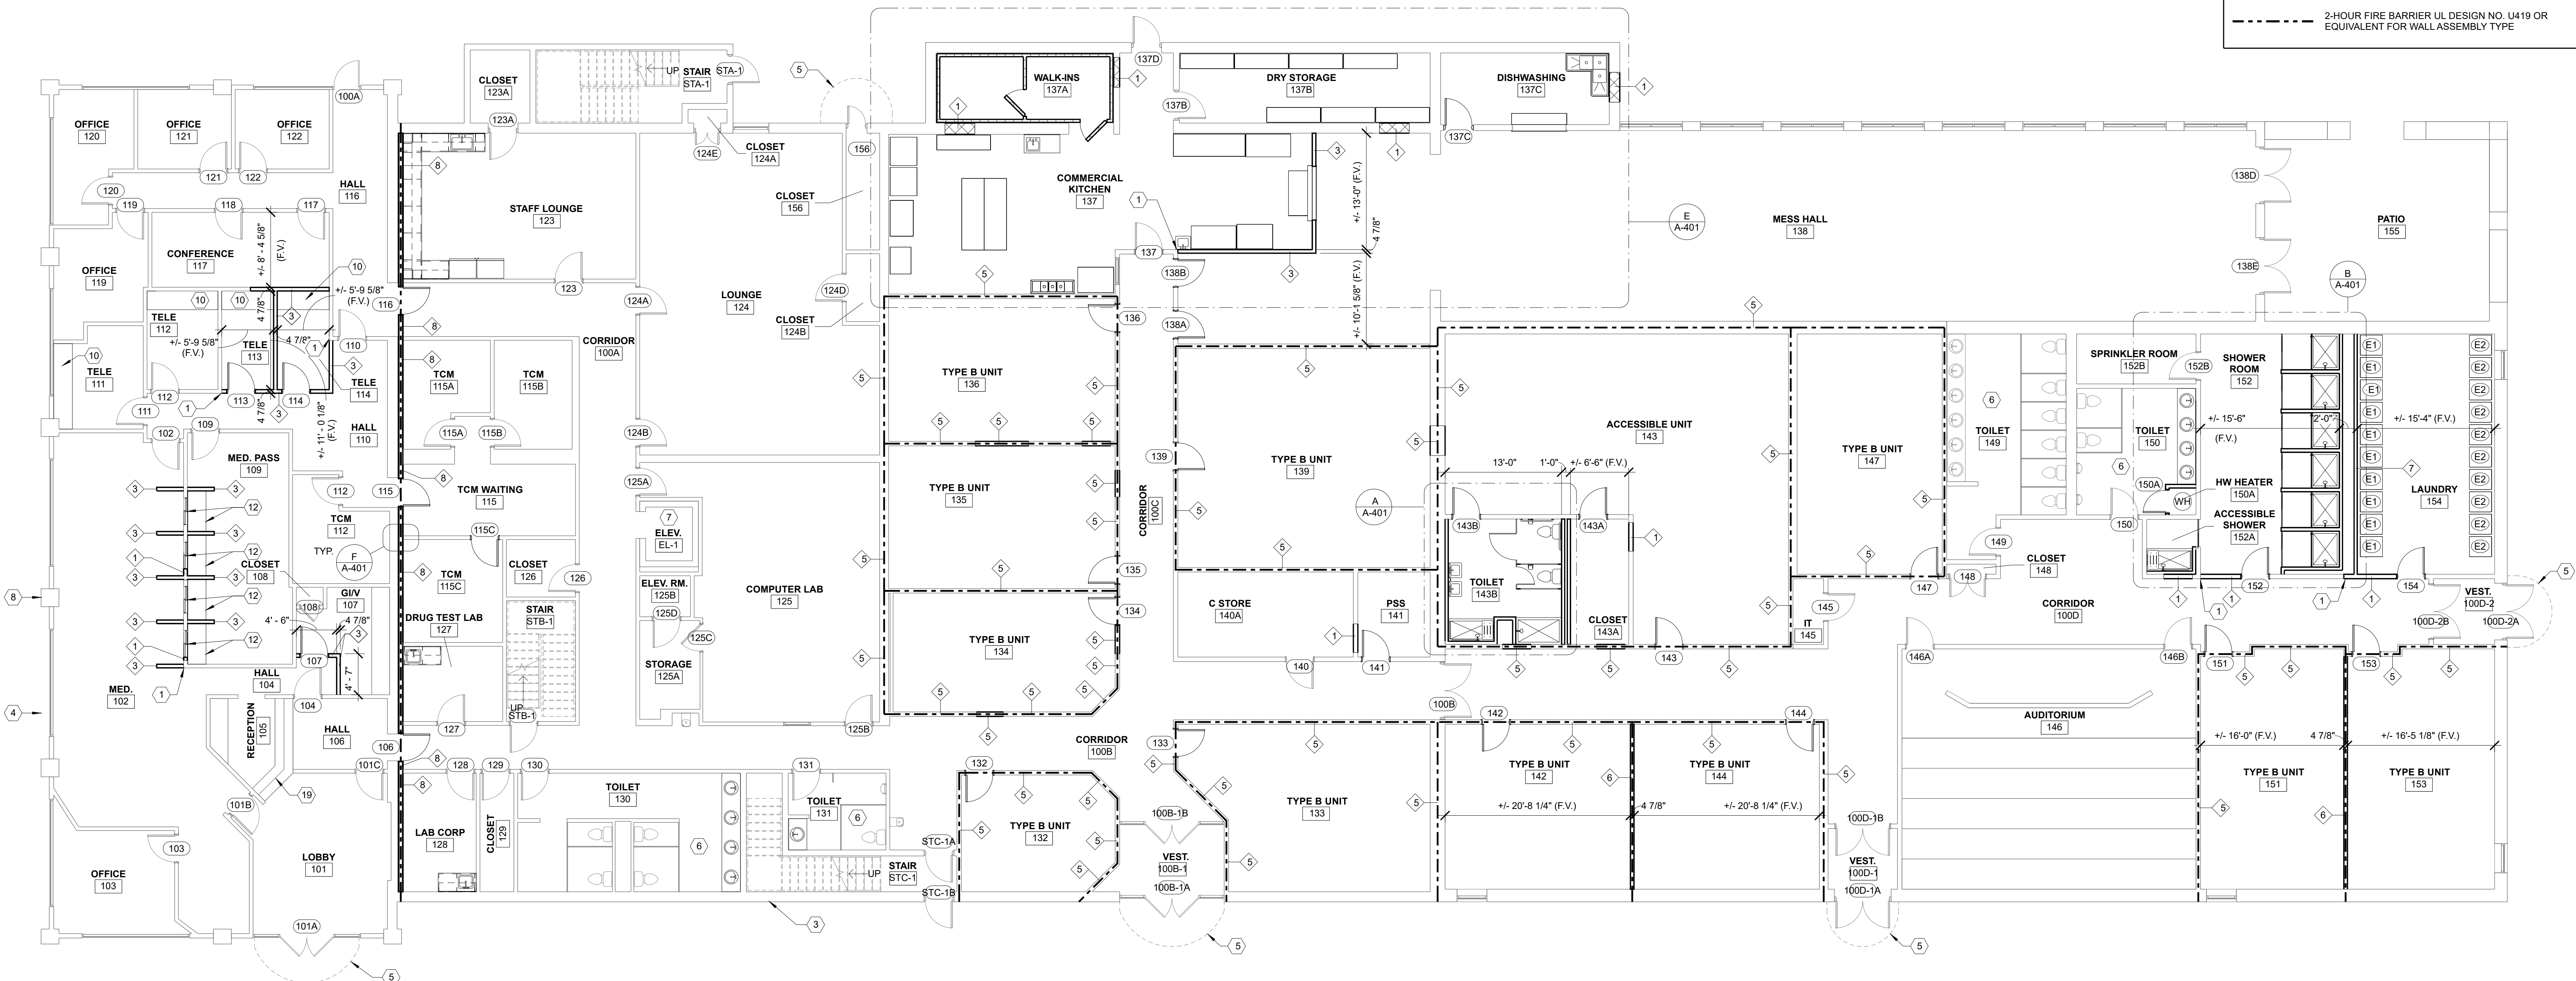

D FIRST FLOOR PLAN - RECOVERY BUILDING
1/8" = 1'-0"

PROSPECTIVE
STUDIO

ARCHITECTURE | PLANNING | DESIGN



CONSTRUCTION DOCUMENTS

ARC 1

LE. KENTUCKY

ARCHITECTURAL

PROJECT 2022014
DATE 05.04.2023

FLOOR PLANS

A PECTIVE
STUDIO WILL RETAIN AN ELECTRONIC VERSION

REU...VER
THAN FOR THE INTENDED PROJECT, THE USER