


1997

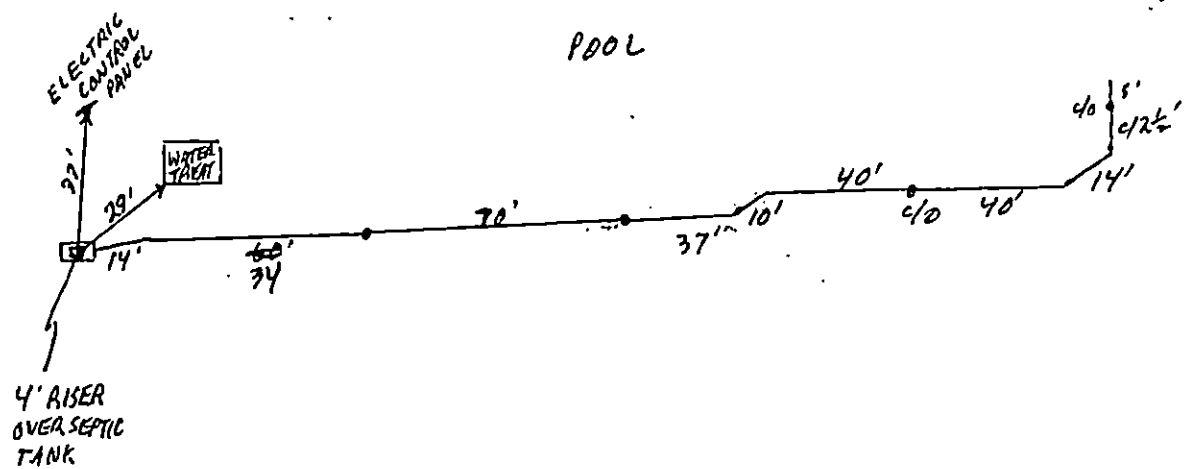

LINE TO OLD BATHHOUSE DISCONNECTED

PART III


Plan for sewage disposal system for premises described in Part I.

VOID
AFTER THIS DATE
3/31/92

NOT DRAWN TO SCALE

NOTICE - READ CAREFULLY

The applicant for this permit is herewith advised that the property to be served by this system is in an area shown to be in the Frederick County Comprehensive Water and Sewerage Plan. The system for which this permit is issued is of a temporary nature and the applicant is herewith advised that it must be disconnected and connected to any future community system if and when it becomes available to serve the property.

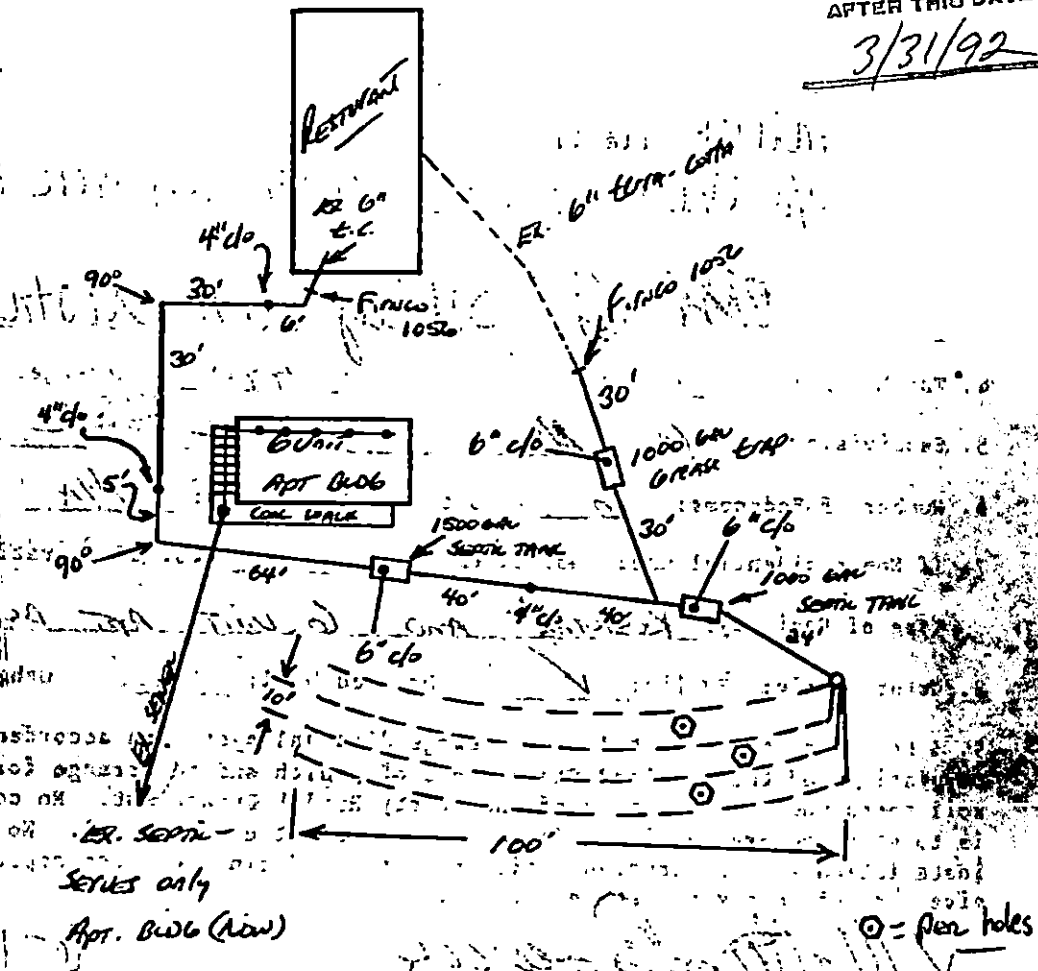

* Max Daily Flow = 3,075 gal/day.

NOTE: Notify the County Health Department at least FORTY EIGHT (48) HOURS before you are ready to cover installation so that inspection can be made for final approval.

FINAL INSPECTIONS

REMARKS:

- (1) ALL NEW PIPE 4" PVC SCH. 40
- (2) GREASE TRAP HAS OUTLET "TEE" 24" FROM TANK BOTTOM.
- (3) APPROVED FOR DESIGN 9/9/91.

GUL

1991

1. County Health Department Should Be Contacted 24 Hours Before You Are Ready To Cover Installation So That Inspection Can Be Made For Final Approval. Please Call Between 8-10 A.M. Monday-Friday.
2. Inspection Holes Of Septic Tank And Sump Pits Must Be Partially Open For Inspection.
3. A Distribution Box Is Required, Sufficient Water Must Be Provided To Verify All Lines Are Level.

Patrick - file with
Schley Inn file!

FREDERICK COUNTY HEALTH DEPARTMENT
Winchester Hall

12 East Church Street Frederick, Maryland
694-1726 or 694-1719

Property I.D. No. App for down 9/5/91 Application No. 91-137

APPLICATION TO BEGIN REPAIR CONSTRUCTION OF ⁶⁰⁶PRIVATE SEWAGE DISPOSAL SYSTEM

Part I

1. Owner: Patrick Weed Telephone No.: _____
Address: c/o Walter Bouers - 5644 Jefferson Pike Frederick, MD 21701
3. Exact location of building site: Schley Inn - restaurant
4. Tax Map Page No.: 66 Blk 19 Parcel No.: 440 Acreage: 3.20 Ac ±
5. Subdivision: N/A Lot: _____ Blk.: _____ Sec.: _____
6. Number of Bedrooms: 6 Bathroom in Basement: N/A
7. If Non-residential use: No. of employees: _____ Hrs. of operation: _____
Type of Facility: Restaurant and 6 unit apt Bldg. install:
8. Water Supply: Public: ☒ Drilled Well: _____ Other: Hm
9. I hereby agree to install this sewage disposal system in accordance with regulations of the Maryland State Board of Health and to arrange for necessary soil tests under supervision of the County Health Department. No construction is to start before receiving County Health Department approval. No part of the installation will be covered until inspected and final written approval is given by the County Health Department. Hildebrand
Walter Bouers Signature of Applicant 6-17-91 Date R+N
ERCA

PART II (To be completed by Health Department)

Results of Soil Test: 4' perc: 60 min/in; 8' perc: 60 min/in / 12' 05' hole
Septic tank capacity: 1000 + 1500 gal. ALSO: 1000 gal. 60 min temp.
Tile Lines: No. of lines N/A Length of each line 1000 Total Length _____
Width of each line N/A Total depth _____ max.
Deep Trenches: No. of lines 4 Length of each line 100' Total Length 400'
Width of each line 2' Liquid depth 0' Total depth 8' max.
Seepage Pits: No. of pits N/A Size _____ x _____ liquid depth _____
Total depth _____ max.
Distance of water supply to nearest part of sewage disposal system 75'
Sewage disposal system to be installed by R+N ERCA

After an inspection of the premises, described in Part I, the plan for the sewage disposal system shown in the sketch below is approved and permission granted to begin construction. This permit is NOT VALID, if the plan, outlined herein, is changed in ANY manner without approval of the Health Department clearly indicated on this application and each such change initialed by the inspecting official.

Bern van Buren
Sanitarian

9/10/91
Date