


ALL USDC, PERMITS, APPROVED AND PLANS INDICATED BY THIS DRAWING ARE APPROVED BY THE ARCHITECTURAL BOARD OF ARCHITECTS WITH THE ARCHITECTS' REGISTRATION BOARD OF ARCHITECTS. THE ARCHITECTS' REGISTRATION BOARD OF ARCHITECTS IS NOT RESPONSIBLE FOR THE DESIGN OR CONSTRUCTION OF THE PROJECT. THE ARCHITECTS' REGISTRATION BOARD OF ARCHITECTS IS NOT RESPONSIBLE FOR THE DESIGN OR CONSTRUCTION OF THE PROJECT. THE ARCHITECTS' REGISTRATION BOARD OF ARCHITECTS IS NOT RESPONSIBLE FOR THE DESIGN OR CONSTRUCTION OF THE PROJECT.

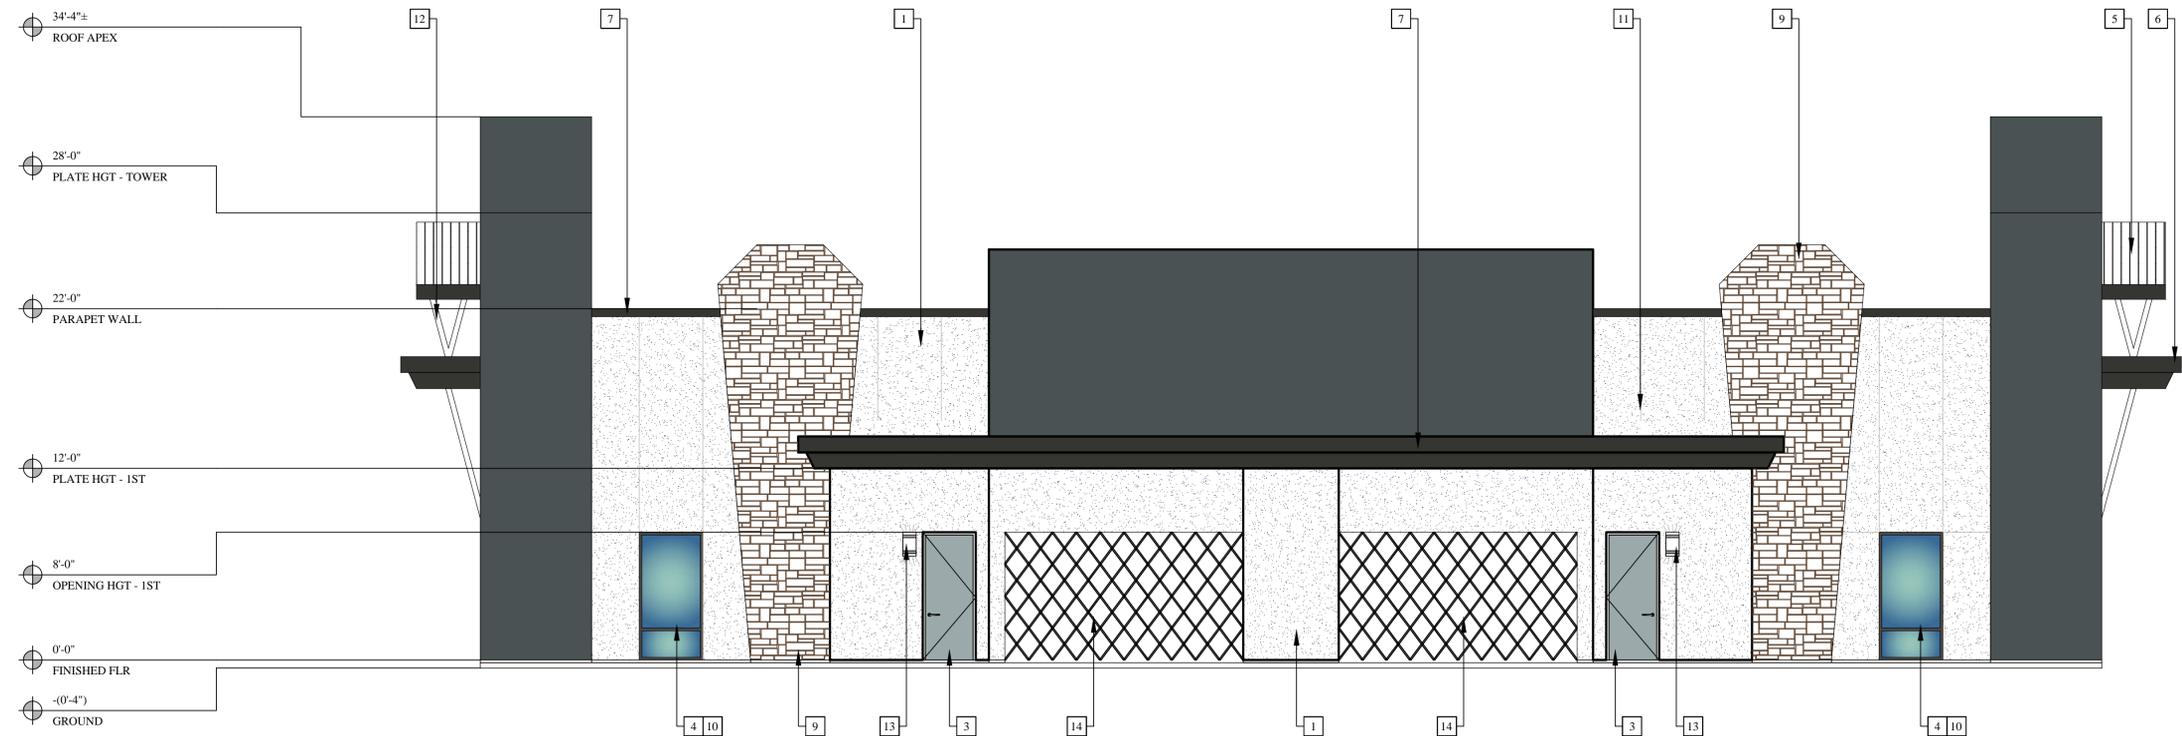

EAST ELEVATION 1

SCALE: 3/16" = 1'-0"

ELEVATION KEYED NOTES

- 1 3 COAT STUCCO SMOOTH FINISH #1:
1/8" MIN. THICKNESS OVER 17 GA. X 1-1/2" HEXAGONAL PAPER BACKED WIRE LATH OVER 2-LAYERS OF TYPE "D" PAPER UNDER-LAYMENT OVER PLYWOOD.
- 2 REFER TO WEEP SCREED DETAIL 1/D1 FOR EXTERIOR WALLS. REFER TO WEEP SCREED DETAIL 2/D1 FOR STEM WALLS. REFER TO WEEP SCREED DETAILS 3/D1 FOR BOX COLUMN(S).
- 3 3 COAT STUCCO SMOOTH FINISH:
1/8" MIN. THICKNESS OVER HI-RIB LATH OVER 2-LAYERS OF TYPE "D" PAPER UNDER-LAYMENT OVER PLYWOOD.
- 4 DOOR OPENING - REFER TO DOOR SCHEDULE ON SHEET A2.1 AND DETAIL(S) ON SHEET D2.
- 5 WINDOW OPENING - REFER TO WINDOW SCHEDULE ON SHEET A2.1 AND DETAIL(S) ON SHEET D2.
- 6 ROOF MATERIAL - STANDING SEAM METAL - INSTALL PER MANUFACTURER'S SPECS AND INSTRUCTIONS. REFER TO DETAILS ON SHEET D10.
- 7 METAL AWNING.
- 8 FOAM CORNICE - REFER TO DETAIL X/D5.
- 9 BOX COLUMN. REFER TO DETAIL 3/D1.
- 10 STONE VENEER - PAGOSA SPRINGS
- 11 PRE-FINISHED ALUMINUM STOREFRONT SYSTEM.
- 12 REGLETS. REFER TO DETAIL X/D4.
- 13 DECORATIVE ELEMENT.
- 14 WALL SCONGE LIGHT FIXTURE. REFER TO ELECTRICAL.
- 15 SLIDING SCISSORS GATE.

PROJECT

PROPOSED
CARWASH FACILITY AND RETAIL BLDG
 1201 N. WEST ST.
 TULARE, CA 93274
 APN: 168-240-068 AND 69




DATE SIGNED: 1/28/2022

Revisions	Date
△ -	-
△ -	-
△ -	-
△ -	-

ELEVATIONS
CAR WASH

CVEAS JOB #:	21131
DATE:	1/28/2022
PLANNING SUBMITTAL #:	XX-XXXX
PLAN CHECK SUBMITTAL #:	XX-XXXX
DRAWN BY:	CVEAS INC
CHECKED BY:	RL
SCALE:	NOTE ON PLANS

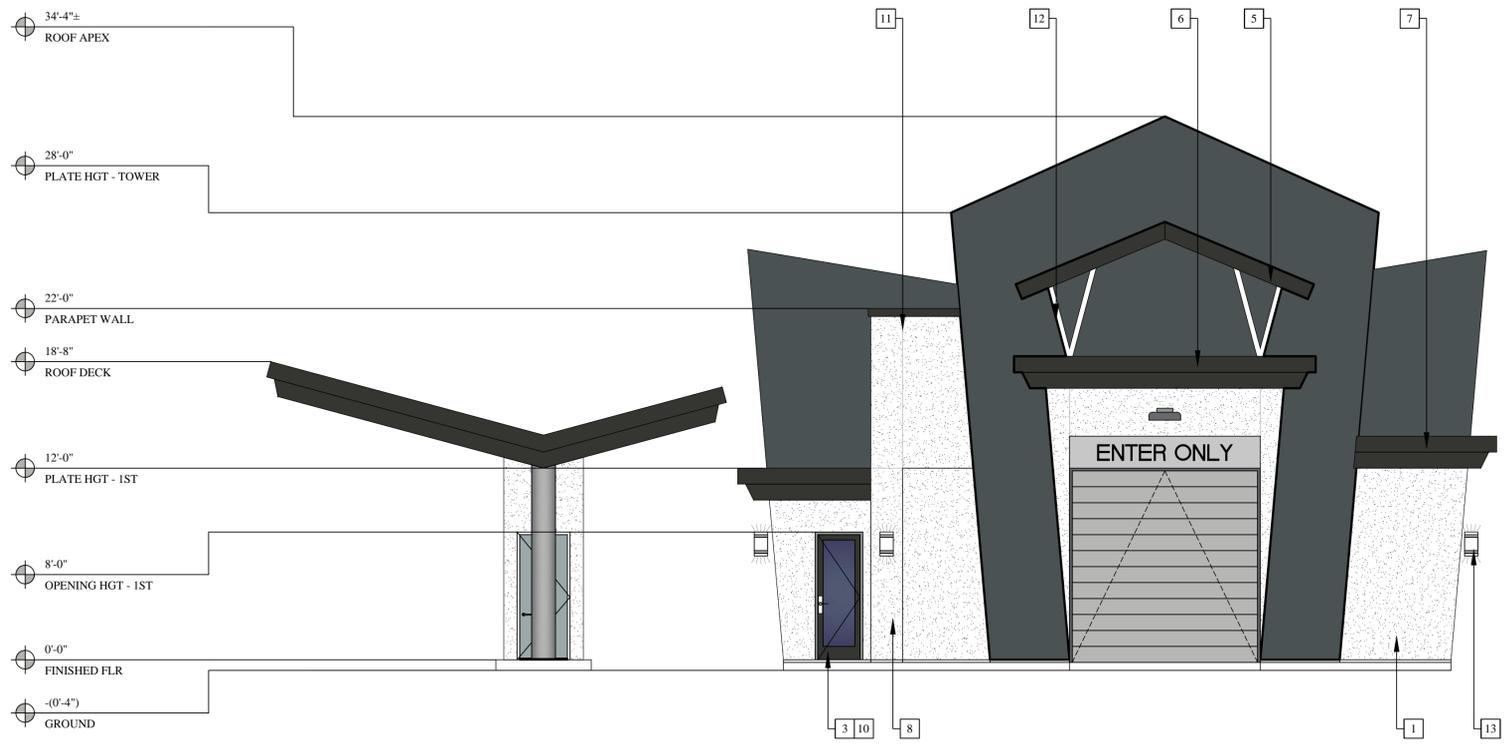

SOUTH ELEVATION 2

SCALE: 3/16" = 1'-0"

A1.6

CIVIL ENGINEERING • LAND SURVEYING • CONSULTING • STRUCTURAL DESIGN • ARCHITECTURAL DRAFTING • COMMERCIAL & RESIDENTIAL BUILDING DESIGN • PLANNING & PROJECT MANAGEMENT