


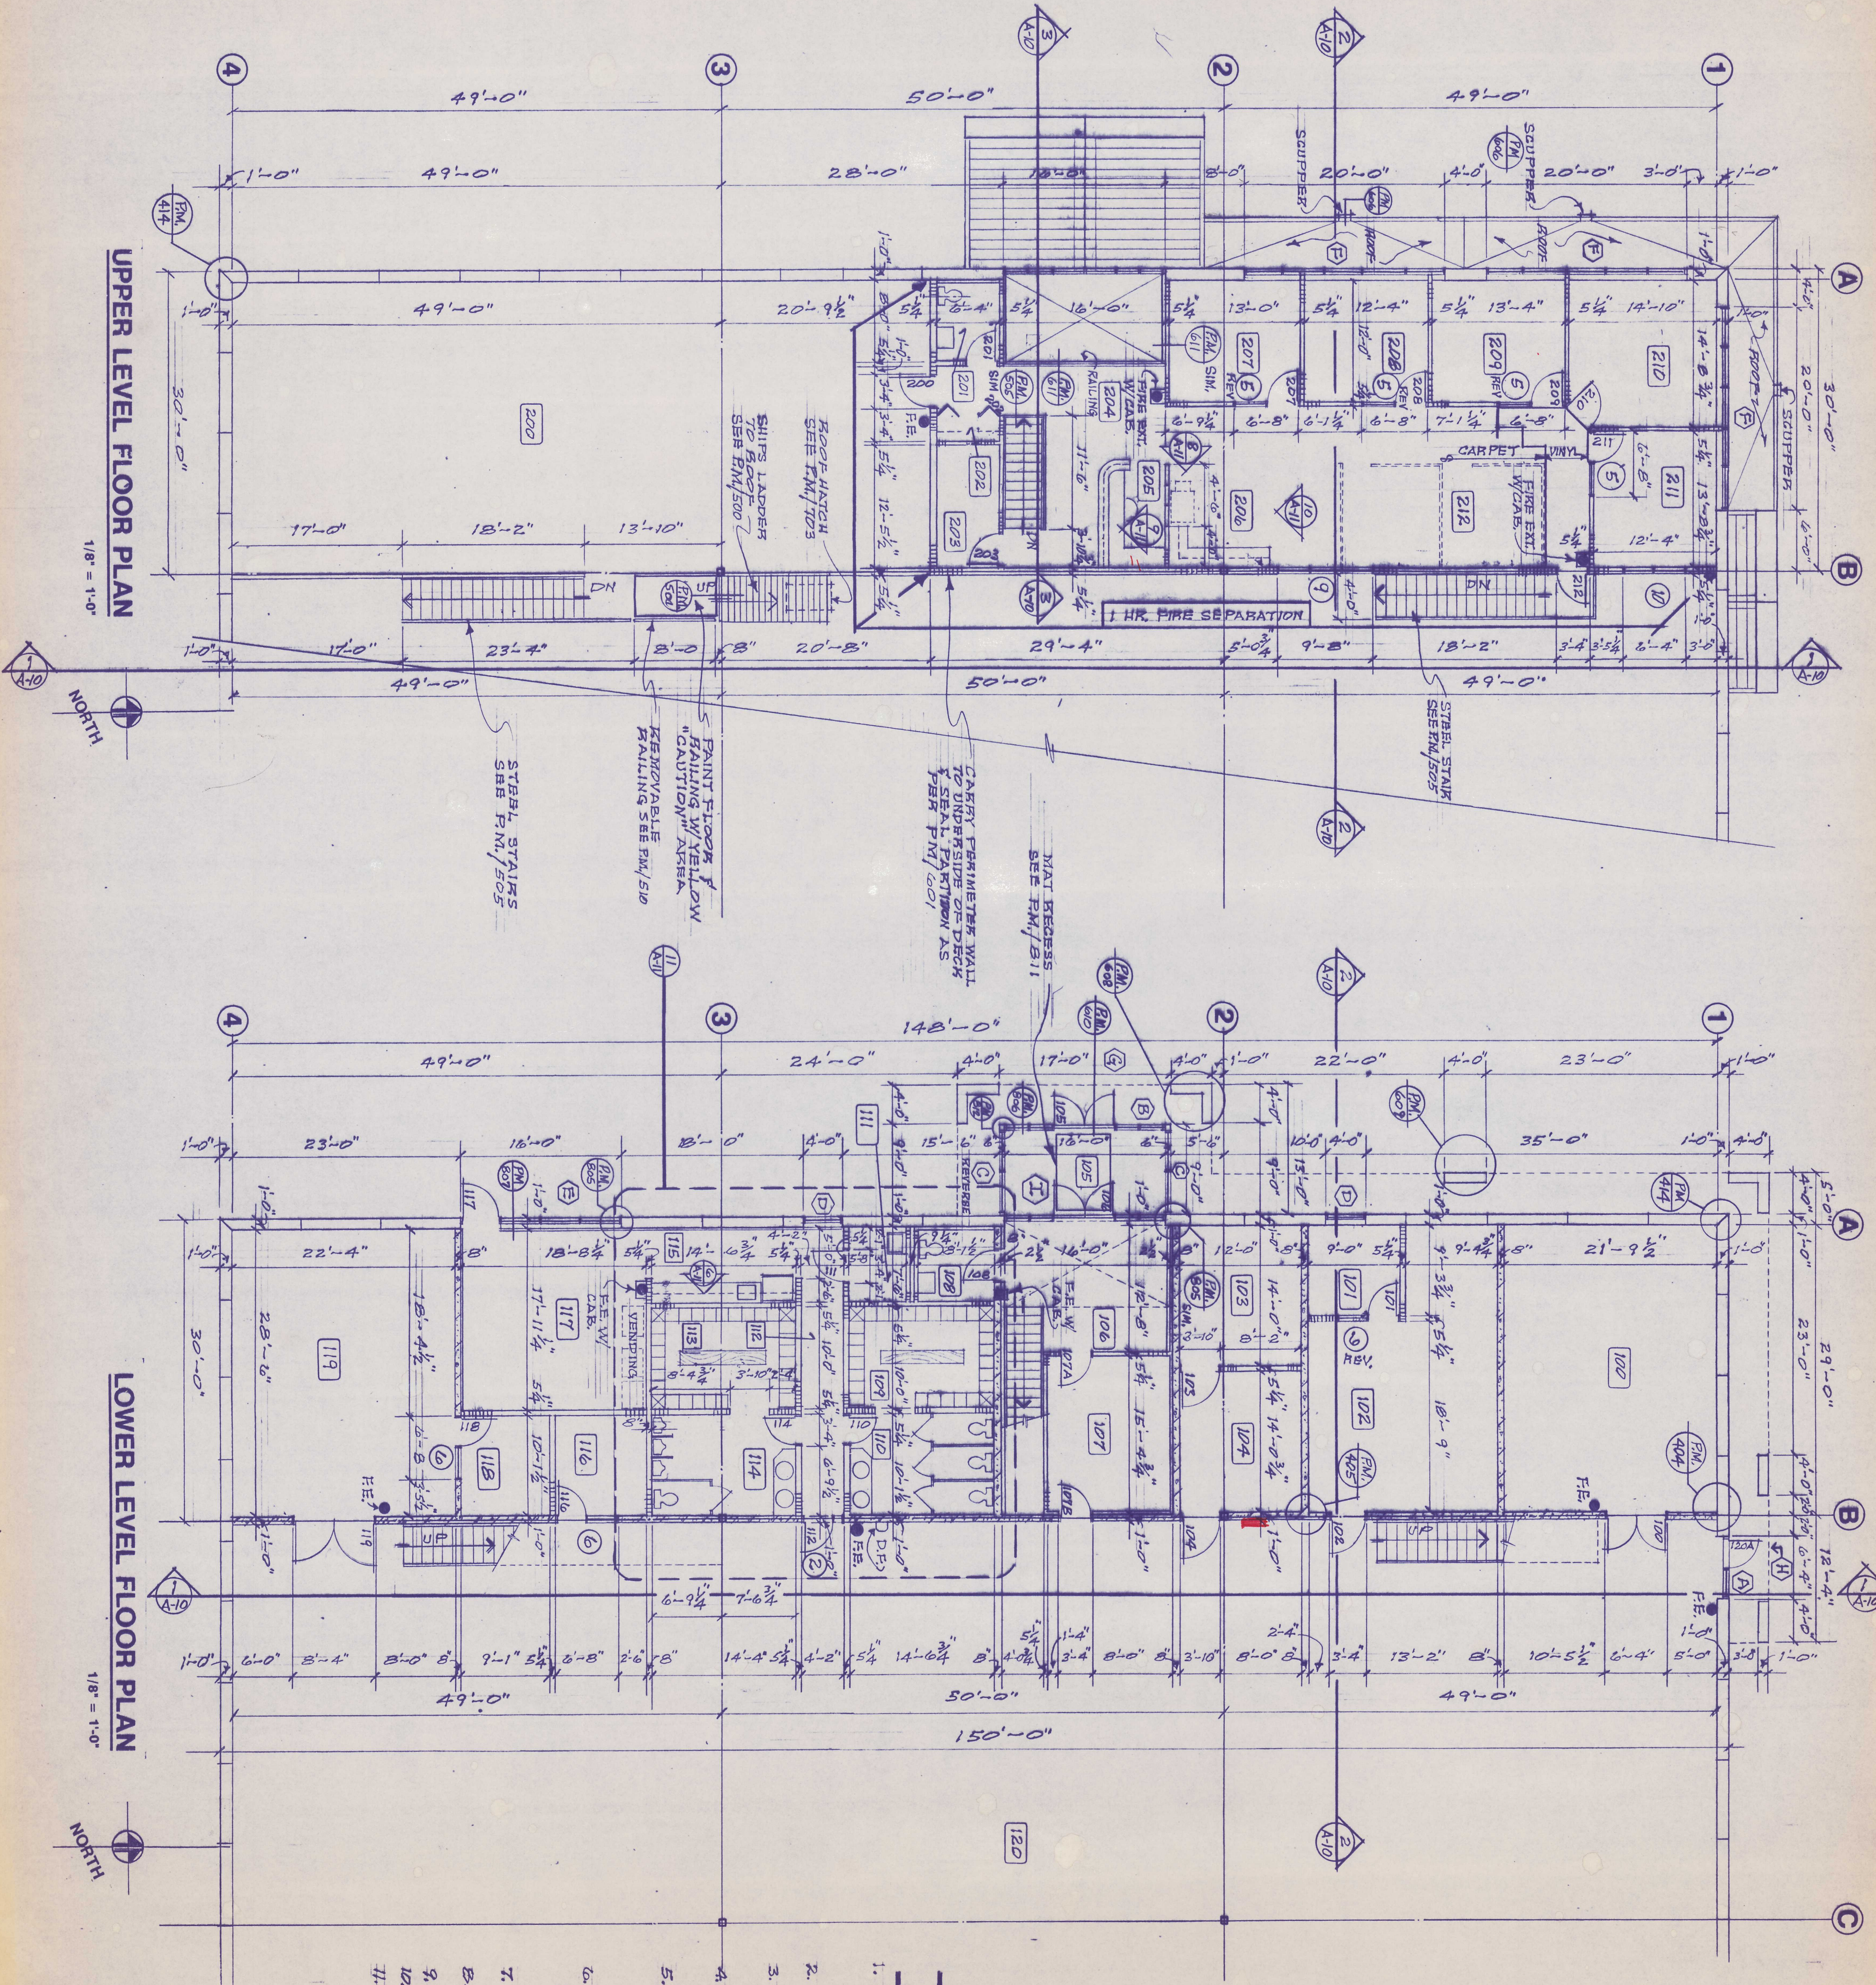

- GENERAL NOTES:**
1. VERIFY LOCATION OF FIRE EXTINGUISHERS WITH LOCAL FIRE MARSHALL. F.E.'S TO BE "ABC" TYPE - PROVIDE CABINETS WHERE INDICATED.
 2. SEE "PROJECT MANUAL" FOR DETAILS WHICH ARE REFERENCED (20).
 3. PROVIDE CHAIN LINK SECURITY & GATES HARDWARE.
 4. ROOM # 108 - TOILET TO MEET ALL STATE HANDICAP CODES & FEDERAL ADA STANDARDS.
 5. SEE PROJECT MANUAL FOR: DOORS & FRAME TYPES, WINDOW TYPES, DOOR & FRAME FINISH SCHEDULES, MATERIAL INDICATIONS, DRAFTING STANDARDS & SYMBOLS.
 6. INTERIOR PARTITION CONTRACTOR SHALL MAINTAIN OVER ALL CEILING OR ROOMS AS INDICATED ON THE ROOM FINISH SCHEDULE.
 7. PROVIDE 2'-0" Ø AROUND E.D. IN TOILET & MECHANICAL ROOMS.
 8. SEE SHEET NOS. S-1 & A-B FOR C.U. TYPES & LOCATIONS.
 9. MAIN LEVEL FIN. FLR. BL. 919.76 ± EEL 100'-0".
 10. MEZZ. LEVEL FIN. FLR. BL. 930.26 ± EEL 110'-6".
 11. PROVIDE ALUMINUM BALAILNG W/ WALL BRACKETS EACH SIDE @ MAIN ENTRY STAIRS.

J. D. PRODUCTS, INC.
OFFICE/MANUFACTURING FACILITY
VADNAIS HEIGHTS, MN.

I hereby certify that this plan was prepared by me or under my direct supervision and that I am a duly Registered under the laws of the State of

Date: _____ Reg. No. _____

Jamb architects
4925 white bear parkway, white bear lake, mn 55110
(612) 653-1696

Project No. 9405
Date: 24 JUN 94
Revisions:
Sheet No. A-7