MATERIALS LEGEND

ADH	ADHESIVE	MFB INS	BATT INSULATION
AWN	AWNING	MT FR	METAL FRAMING
BEM	BEAM	MTL	METAL
BRK	BRICK	MWK	MILLWORK
BRS	BRASS	ORN	ORNAMENTAL
BS FL	BASE FLASHING	PC/MT BD	FIBERGLASS REINFORCED PORTLAND CEMENT BOARD
BUR	BUILT UP ROOF		
CK	CAULK (ING)		
CLG	CEILING	PFN PNL	PREFINISHED PANEL
CMU	CONCRETE MASONRY UNIT	PLA	PLASTIC
CONC	CONCRETE	PLAM	PLASTIC LAMINATE
CT	CERAMIC TILE	PLX	PLEXIGLASS
DCP	DROP CEILING PANEL	PNL	PANEL (ING)
DK	DECK (ING)	PNT	PAINTING
DR	DOOR	PVR	PAVER
FAB	FABRIC	PWD	PLYWOOD
FGL	FIBERGLASS	QT	QUARRY TILE
FL	FLASHING	RL	RAILING
FLR	FLOORING	SIDG	SIDING
FRP	FIBERGLASS REINF. PANEL	SKL	SKYLIGHT
GALV	GALVANIZED	SLNT	SEALANT
GL	GLASS, GLAZING	SND BD	SOUND BOARD
GLB	GLASS BLOCK	ST	STEEL
GLZT	GLAZED TILE	STCO	STUCCO
GT	GROUT	TL	TILE
GYP SHT	GYPSUM SHEATHING	TPTN	TOILET PARTITION
GYP WB	GYPSUM WALL BOARD	VB	VAPOR BARRIER
HDW	HARDWARE	VCB	VINYL COVE BASE
INS BD	INSULATION BOARD	VCT	VINYL COMPO. TILE
IR	IRON	VPLAS	VENEER PLASTER
J	JOIST	WCOV	WALL COVERING
JF	JOINT FILLER	WD FR	WOOD FRAMING
LVR	LOUVER	WD TRM	WOOD TRIM
MAT	MATERIAL	WIR	WROUGHT IRON
MB	MEMBRANE	WN	WINDOW

GENERAL NOTES

- ALL FRAMING IS METAL STUD UNLESS OTHERWISE NOTED.
- ALL FRAMING 16" O.C., EXTERIOR FRAMING TO BE 18 GA., INTERIOR FRAMING TO BE 22 GA., UNLESS OTHERWISE NOTED.
- ALL DIMENSIONS ARE TO FACE OF STUD UNLESS OTHERWISE SHOWN TO BE A FINISH DIMENSION.
- CARPENTER SHALL PROVIDE BLOCKING FOR SUPPORTING AT FOLLOWING AREAS:
  1. SHELVING 2. LAVATORIES 3. URINALS
  4. TOILET ACCESSORIES 5. HAND SINK
  6. BOOTH TABLES 7. BABY CHANGING STATIONS
- REF. ELEVS. FOR ADD. INFO.
- INSTALL FURRING WHERE INDICATED @ 24" O.C.
- ALL WOOD PLATES IN CONTACT WITH CONCRETE SHALL BE PRESSURE TREATED AND SET IN MASTIC.
- ALL WALLS IN THE EMPLOYEE'S RESTROOMS SHALL BE WATER RESIST. GYP. BD. W/FRP FINISH. ALL WALLS IN THE STORAGE AREAS & MECH. RM. SHALL BE WATER RESIST. GYP. BD. PAINTED PB.

IMPORTANT NOTE:

CARPENTER CONTRACTOR SHALL PROVIDE PWD. AS INDICATED BEHIND GYP. WB. (EXCLUDING BEAD BD.-COVERED AREAS) FOR SUPPORT OF ARTIFACT INSTALLATION (TYPICAL).

BOOTHS AND DIVIDERS ARE SUPPLIED BY OTHERS-INSTALLED BY GENERAL CONTRACTOR.

GENERAL CONTRACTOR TO QUOTE HOURLY RATE FOR ADDITIONAL WORK.

INTERIOR FINISH FIRE RATINGS

MATERIAL	FLAME SPREAD	SMOKE DEVL.
WOOD @ PANEL & TRIM (UL RATING W/ FIRE RETARDANT COATING TYPE 129,130,166,416?)	25	50
GYPSUM BOARD PANELS @ WALLS & CEILINGS	15	0
W/R GYPSUM BOARD PANELS @ WALLS & CEILINGS (TYPE X)	20	0
FIBERGLASS REINFORCED PANELS @ WALLS (UL CLASS A)	20	200
ACOUSTIC LAY IN CEILING TILE	25	10
GYPSUM LAY IN PANEL VINYL FACED (2 MIL)	10	0

MATERIAL THICKNESS

EXTERIOR		INTERIOR	
GYP. BD. SHEATHING	5/8"	GYP. BD. (REG. & F.C.)	5/8"
PLYWOOD SHEATHING	1/2"	BEAD BOARD PATTERN PLYWD.	1/4"
TRIM BOARDS	3/4"	BEAD BOARD @ VEST. #100	5/8"
		PLYWOOD BEHIND GYP. BD. AT ARTIFACTS	1/2"
INSULATION AT DRYVIT	1"		
		STAINED PLYWOOD (TYP)	1/2"
		AT BAR FRONT	3/4"
		CEMENT BOARD	5/8"
		CEILING ACOUSTIC BD.	3/4"
		CEILING GYP. PANELS	1/2"

0 1 2 4 8 16 32

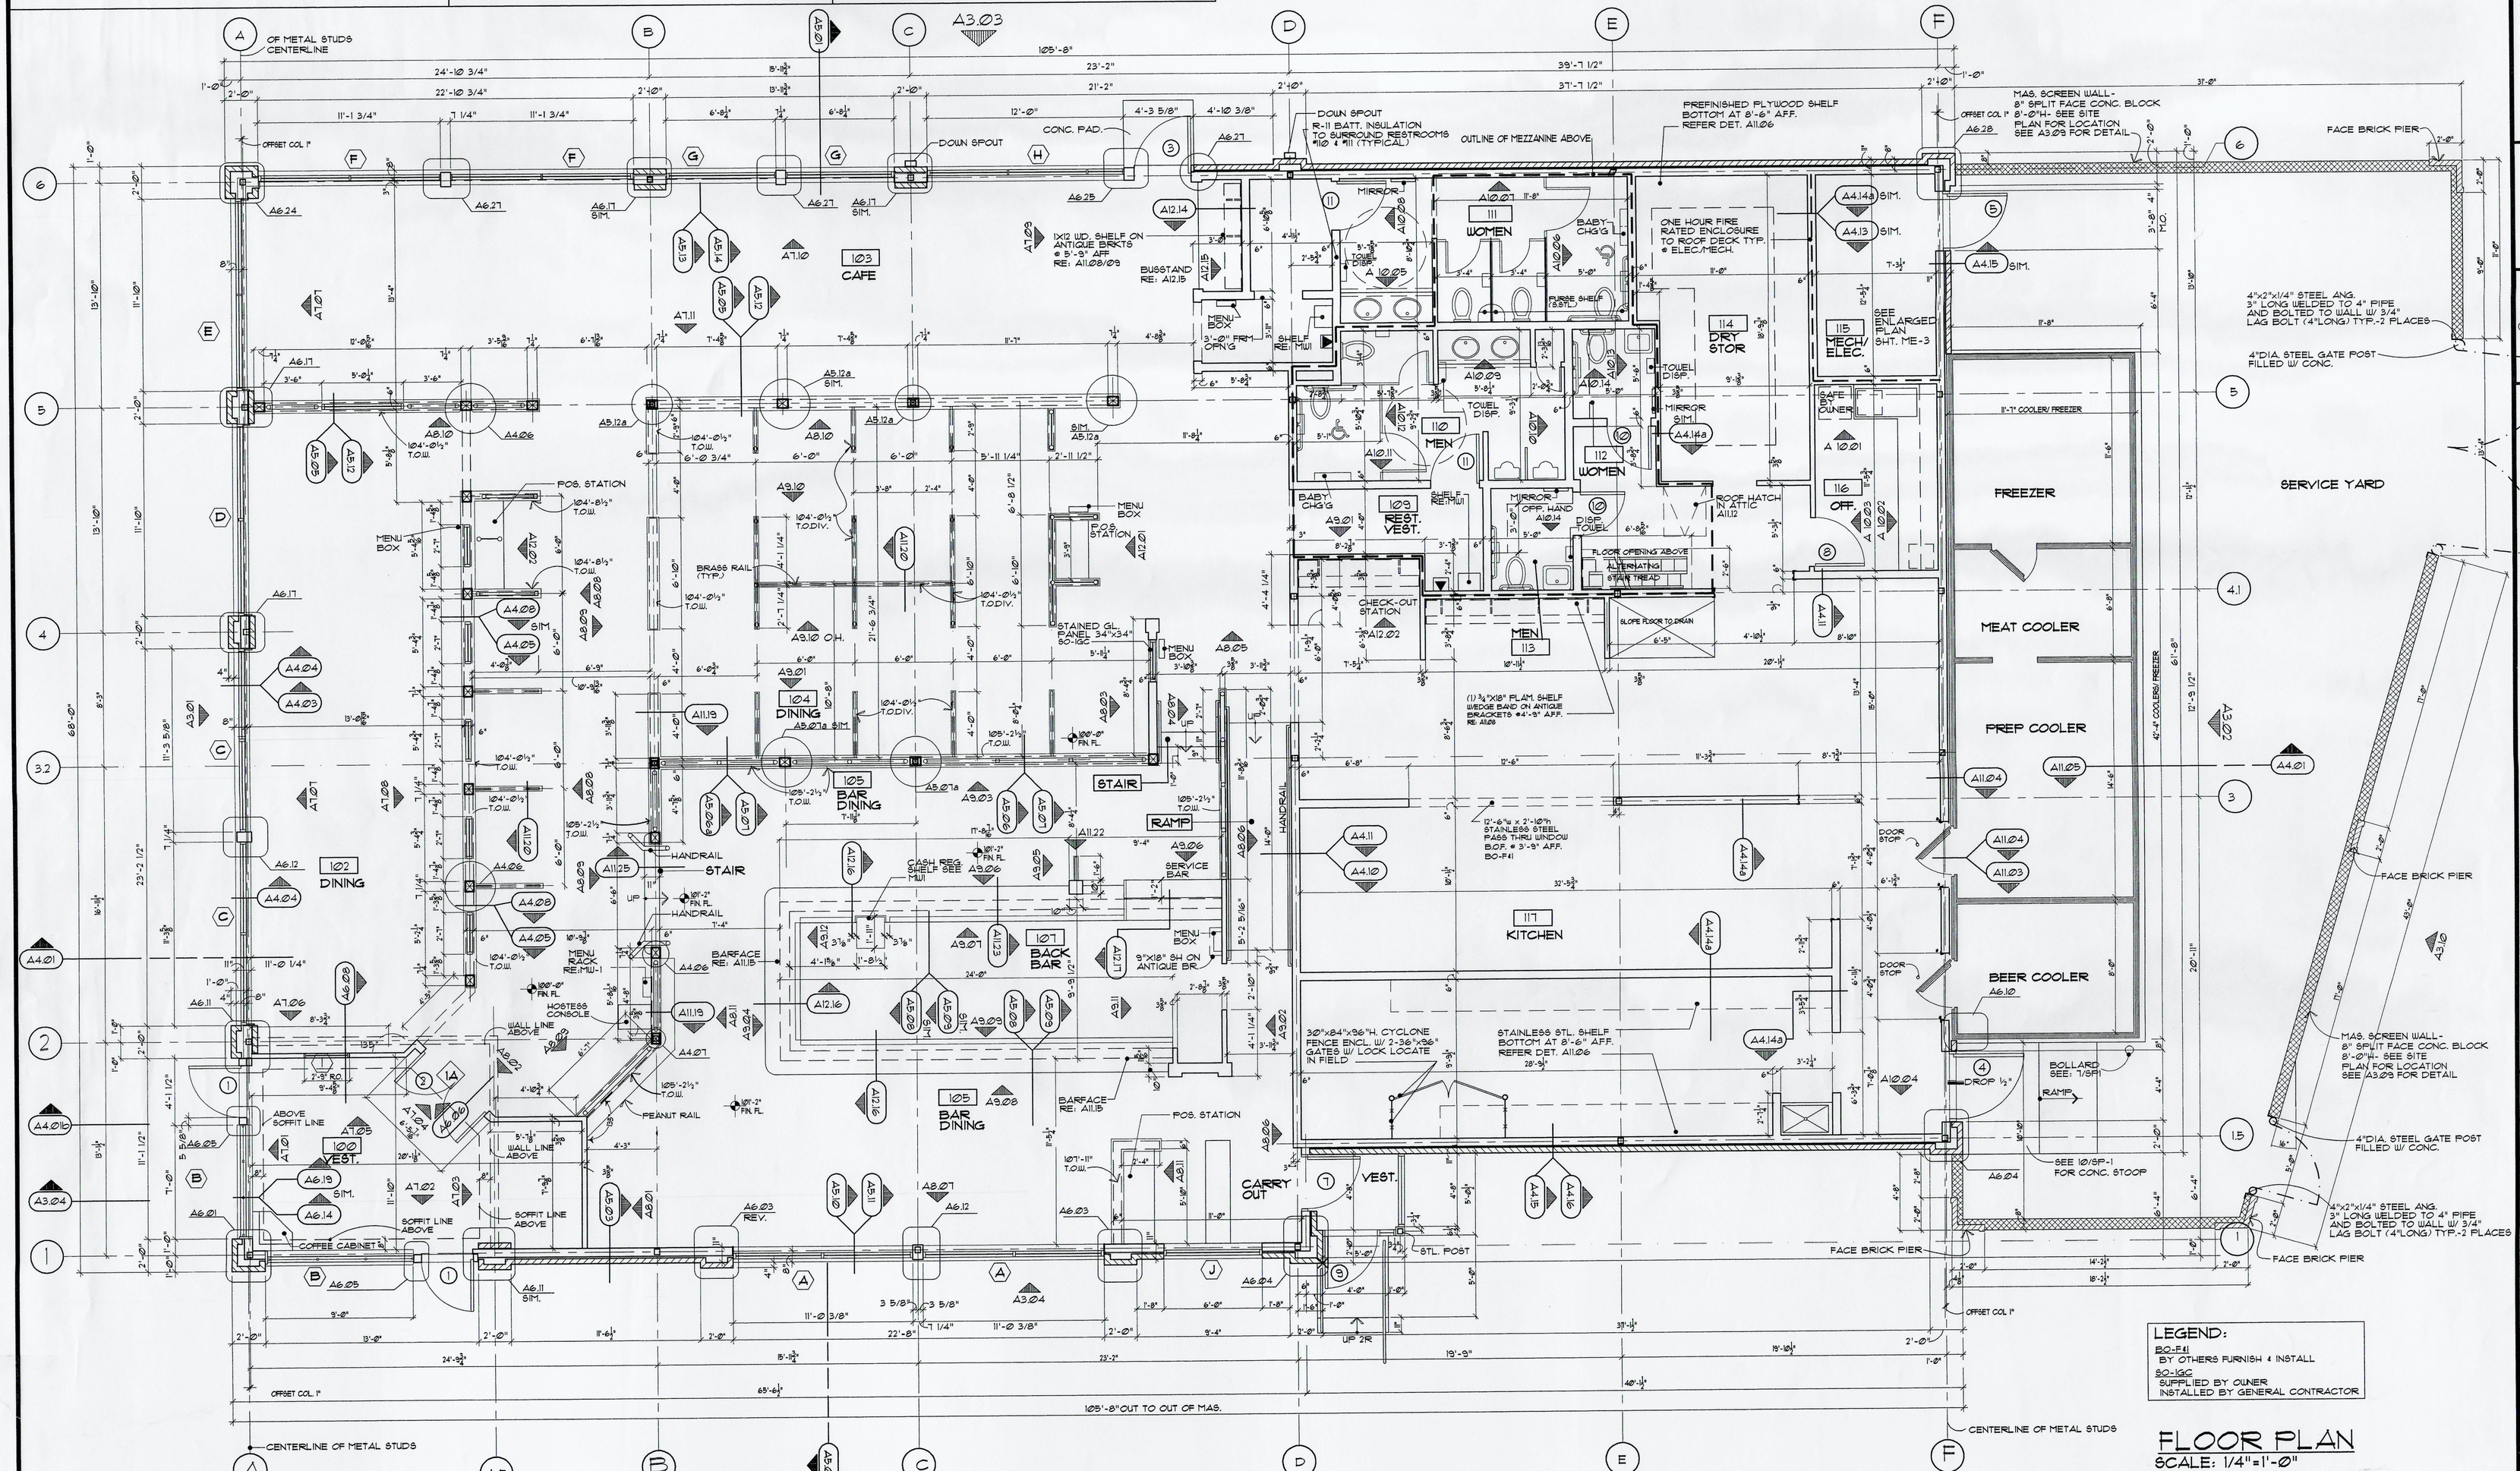

FLOOR PLAN

SCALE: 1/4"=1'-0"

LEGEND:
BO-FII
BY OTHERS FURNISH & INSTALL
SO-IGC
SUPPLIED BY OWNER
INSTALLED BY GENERAL CONTRACTOR

ENGINEERS: STRUCTURAL- MECH/ELEC-

ARCHITECT: GILBERT RICHLAND 2477

FOR INFORMATION REGARDING THESE PLANS CONTACT:

© COPYRIGHT 1999 GILBERT & RICHLAND, ARCHITECT
THESE PLANS ARE THE PROPERTY OF GILBERT & RICHLAND, ARCHITECT AND MAY NOT BE REPRODUCED, PUBLISHED OR USED IN ANY WAY WITHOUT PERMISSION OF THE ARCHITECT. THESE PLANS ARE TO BE USED SOLELY FOR USE IN THE CONSTRUCTION OF ONLY THE PROJECT SHOWN HEREIN.

T.G.I. FRIDAY'S RESTAURANT
STEELS CORNERS RD.
STOW, OHIO

JOB NUMBER

ISSUE DATE 2/12/02

NO.	DATE	BY

SHEET TITLE: FLOOR PLAN

SHEET NUMBER: A-2