

WALL TYPE LEGEND

- Existing Wall - Patch & Repair To "Like New" Condition
- New Furred Wall to Above Ceiling
20 GA S-597 (0.2 mm) metal furring 16' (4800 mm) O.C. with 5/8" (16 mm) metal studs 16' (4800 mm) O.C. with 1/2" (12.5 mm) gypsum board. See intermediate supports and framing details for intermediate supports. Provide 4-degree diagonal bracing @ 48" (1219 mm) O.C. from top of stud wall to structure above.
- New Furred Wall to 8' Above Ceiling
20 GA S-597 (0.2 mm) metal furring 16' (4800 mm) O.C. with 5/8" (16 mm) metal studs 16' (4800 mm) O.C. with 1/2" (12.5 mm) gypsum board. See intermediate supports and framing details for intermediate supports. Provide 4-degree diagonal bracing @ 48" (1219 mm) O.C. from top of stud wall to structure above.
- New Furred Wall to 8' Above Ceiling
20 GA S-597 (0.2 mm) metal furring 16' (4800 mm) O.C. with 5/8" (16 mm) metal studs 16' (4800 mm) O.C. with 1/2" (12.5 mm) gypsum board. See intermediate supports and framing details for intermediate supports. Provide 4-degree diagonal bracing @ 48" (1219 mm) O.C. from top of stud wall to structure above.

WALL BLOCKING KEY

SWICKL ITEM	WEIGHT	HEIGHT	APPROXIMATE WIDTH
HAND DRIVER	20LBS	3'-0" to 4'-0"	2'-2" Sliding 8" Form
MERCH SHELVING	30LBS	4'-2" to 7'-0"	SEE ELEVATIONS
ARTY COMMUNITY BOARD	10LBS	4'-3" to 7'-0"	EXTENT OF CUSTOM ART/MURAL, FRAMES
CBE SHELVES	30LBS	4'-10" to 5'-4"	EXTENT OF BACKBAR
WORKROOM HANDSINK	125LBS	3'-0" to 3'-4"	2'-2" BEHIND SLIK
CUSTOM METAL SHELF	30LBS	5'-3" to 5'-2"	EXTENT OF BACKBAR UPPER CASEWORK

RESPONSIBILITY LEGEND

- GC-GC FURNISHED BY GC / INSTALLED BY THE GC
 - LL-LL FURNISHED BY LANDLORD / INSTALLED BY THE LANDLORD
 - SE-GC FURNISHED BY STARBUCKS (WAREHOUSE OR VENDOR) / INSTALLED BY GC
 - SR-SB FURNISHED BY STARBUCKS (WAREHOUSE OR VENDOR) / INSTALLED BY SB
- NOTE:** ALL MATERIALS AND FINISHES WITH STARBUCKS DESIGN MANAGER PRIOR TO CONSTRUCTION

INTERIOR FLOOR PLAN NOTES

1. VERIFY ALL DIMENSIONS ON DRAWING. DIMENSIONS AND NOTES BY STARBUCKS CONSTRUCTION MANAGER OR ANY DISCREPANCIES PRIOR TO CONSTRUCTION. ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE.
2. GENERAL CONTRACTOR TO PROVIDE FIRE RATED WOOD STUD BLOCKING OR EQUIVALENT TO SUPPORT ANY WALL ATTACHMENT AND/OR SHIMING.
3. ALL DOORS TO PROVIDE 2" (50mm) MINIMUM CLEARANCE UNDER DOOR. DOORS TO BE LOCATED AS SHOWN UNLESS OTHERWISE NOTED.
4. VERIFY ALL EXISTING DOORS, HARDWARE AND FRAMES MEET STARBUCKS AND/OR CODE REQUIREMENTS.
5. INSTALL 1/8" (3mm) MOISTURE RESISTANT GYPSUM BOARD ON BRICKER WALL PER SPECIFICATION.
6. ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE.
7. SEE SCHEDULE 11.031 FOR EXTERIOR DOOR AND WINDOW SCHEDULES.
8. STARBUCKS VENDOR TO PROVIDE HARDWARE SCHEDULE AND HARDWARE COMPONENTS. GC TO INSTALL.
9. PRIOR TO SAW CUTTING, DRILL THROUGH SLAB TO VERIFY LOCATION OF REINFORCING. GC TO VERIFY AND REPORT FINDINGS TO ARCHITECT FOR FURTHER EVALUATION.

SHEET NOTES

1. EXISTING ELECTRICAL PANELS TO REMAIN.
2. EXISTING REAR SERVICE DOOR TO REMAIN. GC TO ENSURE IN PROPER WORKING ORDER AND REPAIR AS NECESSARY.
3. EXISTING STOREFRONT DOOR AND WINDOW SYSTEM TO REMAIN.
4. ALUM FACE OF FINISHED WALL.
5. PROPOSED LOCATION OF CASEWORK (BEHIND WALL) GC TO VERIFY LOCATION ON SITE. CASEWORK VENDOR FOR FINAL REFINISH AS REQUIRED.
6. EXISTING INTERIOR DOOR TO REMAIN. GC TO ENSURE IN PROPER WORKING ORDER AND REPAIR AS NECESSARY. REFINISH AS REQUIRED.
7. EXISTING STRUCTURAL COLUMN TO REMAIN.
8. EXISTING EXTERIOR DOOR TO REMAIN. REMOVE HARDWARE AS NEEDED TO REEF EXISTING DOOR AT LOCK POSITION.
9. REVERSE DOOR SWING OF EXISTING INTERIOR DOOR.
10. GC TO PROVIDE AND INSTALL PUSH BUTTON DOOR OPENER OVER HEAD POWERED DOOR CLOSER.
11. GC TO INSTALL PUSH PLATE ACTUATOR.


EXISTING RESTROOM DOOR SCHEDULE

ID	COUNT	DESCRIPTION	INST. BY	COMMENTS
X2201	1	EXISTING RESTROOM DOOR	GC	REMOVE EXISTING DOOR AND FRAME. REVERSE DOOR SWING AND INSTALL PUSH PLATE ACTUATOR IN RESTROOM AND REST ROOM VESTIBULE COORDINATE WITH STARBUCKS SM/DURING INSTALLATION.
X2202	1	EXISTING RESTROOM DOOR	GC	REMOVE EXISTING DOOR AND FRAME. REVERSE DOOR SWING AS SHOWN ON DRAWING.


INTERIOR WALL LEGEND

- NEW FULL HEIGHT WALL
- EXISTING WALL
- WALL TAG
- WALL BLOCKING KEY
- EXISTING COLUMN

NEW WALL CONSTRUCTION DETAILS

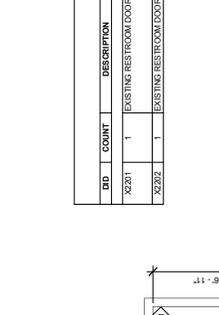

FLOOR PLAN

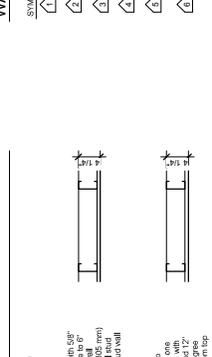

STARBUCKS COFFEE COMPANY

2401 UTAH AVENUE SOUTH
SEATTLE, WASHINGTON 98134
206.338.5151

© 2017 STARBUCKS COFFEE COMPANY

Design Forum Architects Inc.

7000 1st Avenue, Suite 400
Seattle, WA 98105
206.461.1200

7000 1st Avenue, Suite 400
Seattle, WA 98105
206.461.1200

Design Forum Engineering

7000 1st Avenue, Suite 400
Seattle, WA 98105
206.461.1200

7000 1st Avenue, Suite 400
Seattle, WA 98105
206.461.1200

CANNERY ROW

PROJECT NAME: CANNERY ROW, SUITES A & B
PROJECT ADDRESS: 711 CANNERY ROW, MONTEREY, CA 93940

STORE #: 5978
PROJECT #: 07381-047
ISSUE DATE: 01/09/18
DESIGN MANAGER: LAURAN KOLUS
PRODUCTION DESIGNER: JANET WERNKE
LEED AP: JENNIFER WILSON

Revision Schedule

Rev	Date	By	Description

SHEET TITLE

FLOOR PLAN
SCALE: 1/4" = 1'-0"
SHEET NUMBER: I-1103