


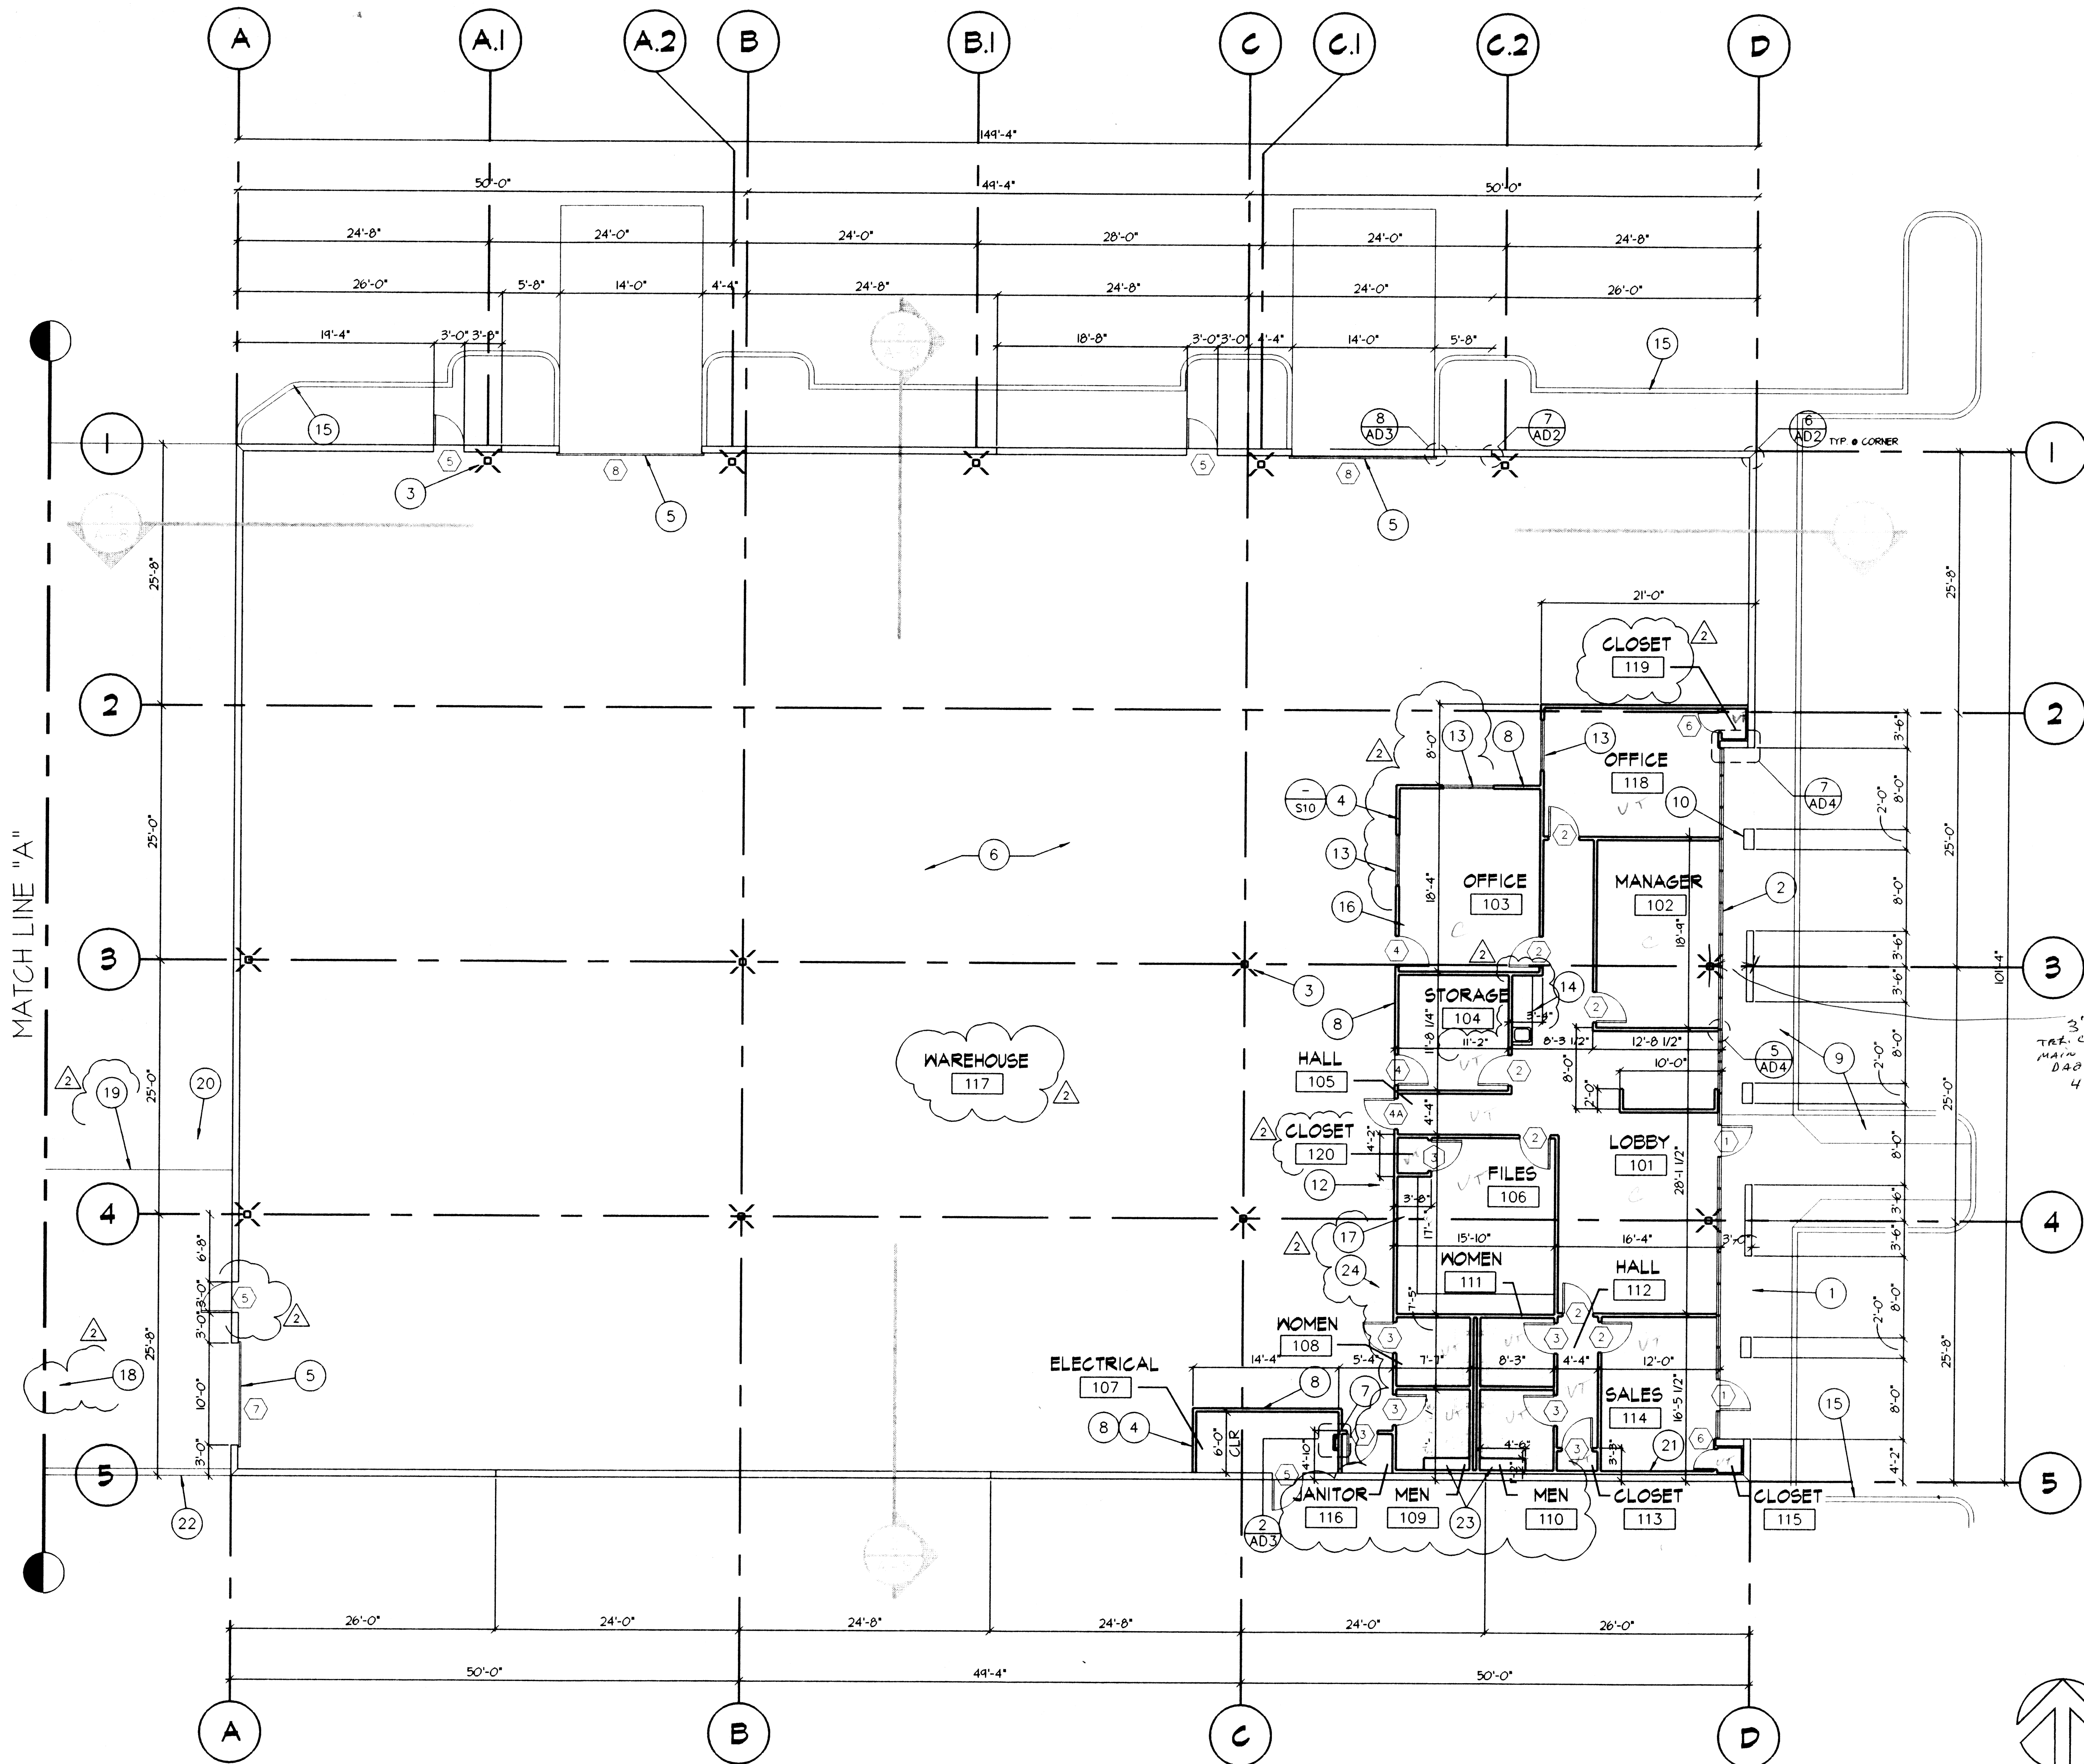

GENERAL/MATERIAL NOTES

1. LINE OF CONCRETE PANEL ADV.
2. CENTER-GLAZED ALUM. STOREFRONT SYSTEM W/ CLEAR ANODIZED FINISH.
3. STRUCTURAL COLUMN SEE STRUCTURAL DRAWINGS.
4. LINE OF FULL-HEIGHT DEMISING WALL W/ 5/8" TYPE "X" GYP. BD. EA. SIDE OF 6" 20 GA. MTL. STUDS @ 24" O.C. TYP. AT PERIMETER OF OFFICE AREA.
5. MANUALLY OPERATED ROLL-UP DOOR.
6. SEALED CONCRETE SLAB. SEE STRUCT. FOR MORE DETAIL.
7. ACCESS LADDER TO ROOF HATCH ABOVE. EXTEND WALL TO UNDERSIDE OF ROOF FRAMING. PROVIDE INTERMEDIATE PLYWOOD PLATFORM ABOVE CEILING OF ELECT. ROOM AND 24" x 30" ACCESS PANEL @ ELECT. ROOM CEILING.
8. 8'-0" H. 5/8" PLYND. MAINSCOT @ BOTTOM OF ALL GYP. BD. WALLS FACING HWSE. TYP. BUTT PLYND EDGE AGAINST GYP. BD. AND MAINTAIN PLYND FLUSH W/ GYP. BD. ABOVE.
9. SEE LANDSCAPE AND CIVIL DWGS. FOR MORE INFO. ON LANDSCAPE AND WALK AREAS.
10. FINISH ALL EXPOSED SIDES OF PANELS. SAME AS PANEL FRONT.
11. 5'-0" HIGH WALL.
12. DRINKING FOUNTAIN. SEE PLUMBING PLANS.
13. 5/8"x3/4" W/ED GLASS WINDOW W/ 20 MIN. RATED TIMELY FRAME. WINDOW SILL AT 4'-0" AFF. CENTER WINDOWS ON WALLS WHERE THEY ARE LOCATED.
14. 24" WIDE PLASTIC LAMINATED COUNTER TOP W/ PLAS. L.A. 6" SPLASH SKIRT, RETURN AND DOOR FACES FOR CABINETS ABOVE AND BELOW. PROVIDE ADJUSTABLE SHELVES THROUGHOUT, WITH (2) LAYERS ABOVE AND ONE BELOW.
15. SEE SITE PLAN FOR LAYOUT OF CURBS.
16. PROVIDE R-19 BATT INSULATION AT CLG. THRU-OUT OFFICE AREA, TYP.
17. PROVIDE 24" W. PLAS. LAM. COUNTER TOP AT 30" AFF AND 6" SPLASH W/ VERTICAL SUPPORT @ 48" O.C. SPACE UNDER COUNTER TOP WILL REMAIN OPEN.
18. SEE SITE PLAN FOR LOADING DOCK INFO.
19. EDGE OF LOADING DOCK.
20. LINE OF 3'-0" PRE-FAB METAL CANOPY OVERHANGS ABOVE.
21. FURR ALL INTERIOR FACE OF EXTERIOR WALLS IN OFFICE AREA W/ 4"x20 GA. MTL. STUDS @ 24" O.C. W/ 5/8" GYP. BD. 4 R-11 BATT INSUL. TO CLG. HT.
22. 6" H. CONC. TILT-UP SCREEN WALL, FINISHED TO MATCH BLDG. BASE. SEE STRUCT. DRWG.
23. 4" H. FURRED WALL. COVER TOP OF WALL W/ MARLITE TO MATCH MAINSCOT. PROVIDE EDGE AND CORNER HOLDINGS ALL AROUND.
24. WALL HING SINK. SEE PLUMBING PLANS.

WALL LEGEND

- 8" CONCRETE TILT-UP WALL
- OFFICE/WAREHOUSE SEPARATION WALLS:
6" 20 GA. MTL. STUDS @ 24" O.C. W/ 5/8" TYPE "X" GYP. BD. EACH SIDE 4 R-11 BATT INSULATION TO CLG. HGT.
- INTERIOR PARTITIONS (SEE S-10 FOR ANCHOR DETAILS):
4" 20 GA. MTL. STUDS @ 24" O.C. W/ 5/8" TYPE "X" GYP. BD. EACH SIDE R-11 BATT INSULATION TO CLG. HGT. AT TOILET PERIMETER WALLS ONLY, UNDO.