

NOTE:
ALL EXTERIOR DOORS SHALL
REMAIN, ONLY PLACE THE HARDWARE
TO MATCH ALL NEW INTERIOR.

NOTE:
ALL CEILING TILE AND
CEILING GRIDS TO BE
REMOVED

ALL DASHED LINES REPRESENT WALLS
& DOORS TO BE REMOVED

NOTE:
ALL CEILING TILE AND
CEILING GRIDS TO BE
REMOVED

NOTE: REMOVE ALL EXISTING PLUMBING
& TOILET FIXTURES & TOILET PARTITION
AND PROVIDE ALL NEW

WALL LEGEND	
DEMOLITION WALLS	
EXISTING WALLS TO REAMIN	

WALL LEGEND
1/4" = 1'-0"


1 LEVEL 2 DEMOLITION PLAN
1/4" = 1'-0"

GENERAL NOTES:

- ALL WORK SHALL BE DONE IN ACCORDANCE WITH ALL APPLICABLE LOCAL, STATE, AND FEDERAL AUTHORITIES, CODES, RULES AND REGULATIONS.
- ANY UNFORESEEN OR UNCLEAR CONDITIONS SHALL BE REPORTED TO THE ARCHITECT PRIOR TO PROCEEDING WITH WORK.
- THE CONTRACTOR IS SPECIFICALLY RESPONSIBLE FOR ALL MEANS AND METHODS OF JOB SITE SAFETY.
- ANY CONFLICT IN THE DRAWINGS OR BETWEEN DRAWINGS AND SPECIFICATIONS TO BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT. THE CONTRACTOR SHALL NOT PROCEED WITH WORK UNTIL WRITTEN CLARIFICATION FROM THE ARCHITECT IS RECEIVED REGARDING ANY CONFLICT.
- FURNISH AND INSTALL APPROPRIATE BLOCKING IN WALLS FOR ALL WALL HUNG ITEMS, I.E. CABINETS, SHELVING, COUNTERS, GRAB BARS, ETC. REFER TO INTERIOR ELEVATIONS AND PLANS FOR EQUIPMENT LOCATIONS.
- ALL DIMENSIONS AND FIELD CONDITIONS SHALL BE VERIFIED. ANY DISCREPANCIES IN DIMENSIONS, CONDITIONS OR DOCUMENTS SHALL BE BROUGHT IMMEDIATELY TO THE ARCHITECT'S ATTENTION. DIMENSIONS INDICATED ARE FROM FINISHED SURFACE TO FINISHED SURFACE.
- THE G.C. SHALL MAINTAIN EXIT EGRESS PATHS TO EXISTING EXIT DOORS DURING CONSTRUCTION.

DEMO NOTES
1/4" = 1'-0"

Reviewed for Code Compliance
02/17/2023
Hayden Scarnato

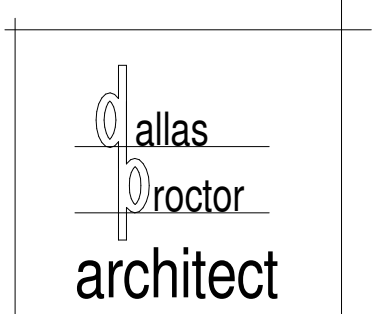

Planning
Construction
Management
Interiors

1602 W. HWY 380
Suite 800
Decatur, Texas
76234
214-244-0506

A RENOVATION PROJECT
HQ OFFICE BUILDING
414 W PARKWAY ST.
DENTON TEXAS



DATE: 01/02/23

REVISIONS:

NO.	DESCRIPTION	DATE

REVIEWED BY: Checker

DRAWN BY: Author

DATE: 01/02/23

PROJECT NO. 22-089

SHEET TITLE

LEVEL 2 DEMOLITION PLAN

SHEET:

A2.3