



6332 FLANK DRIVE, HARRISBURG, PA 17112




ON  
OF  
S, LLC.  
PIED  
AND /  
TO  
OWN  
CTION.

|     |
|-----|
| NO. |
| Y   |
| BY  |
|     |
|     |
|     |
|     |
|     |
|     |

5

|     |
|-----|
| ERY |
| NS  |

1

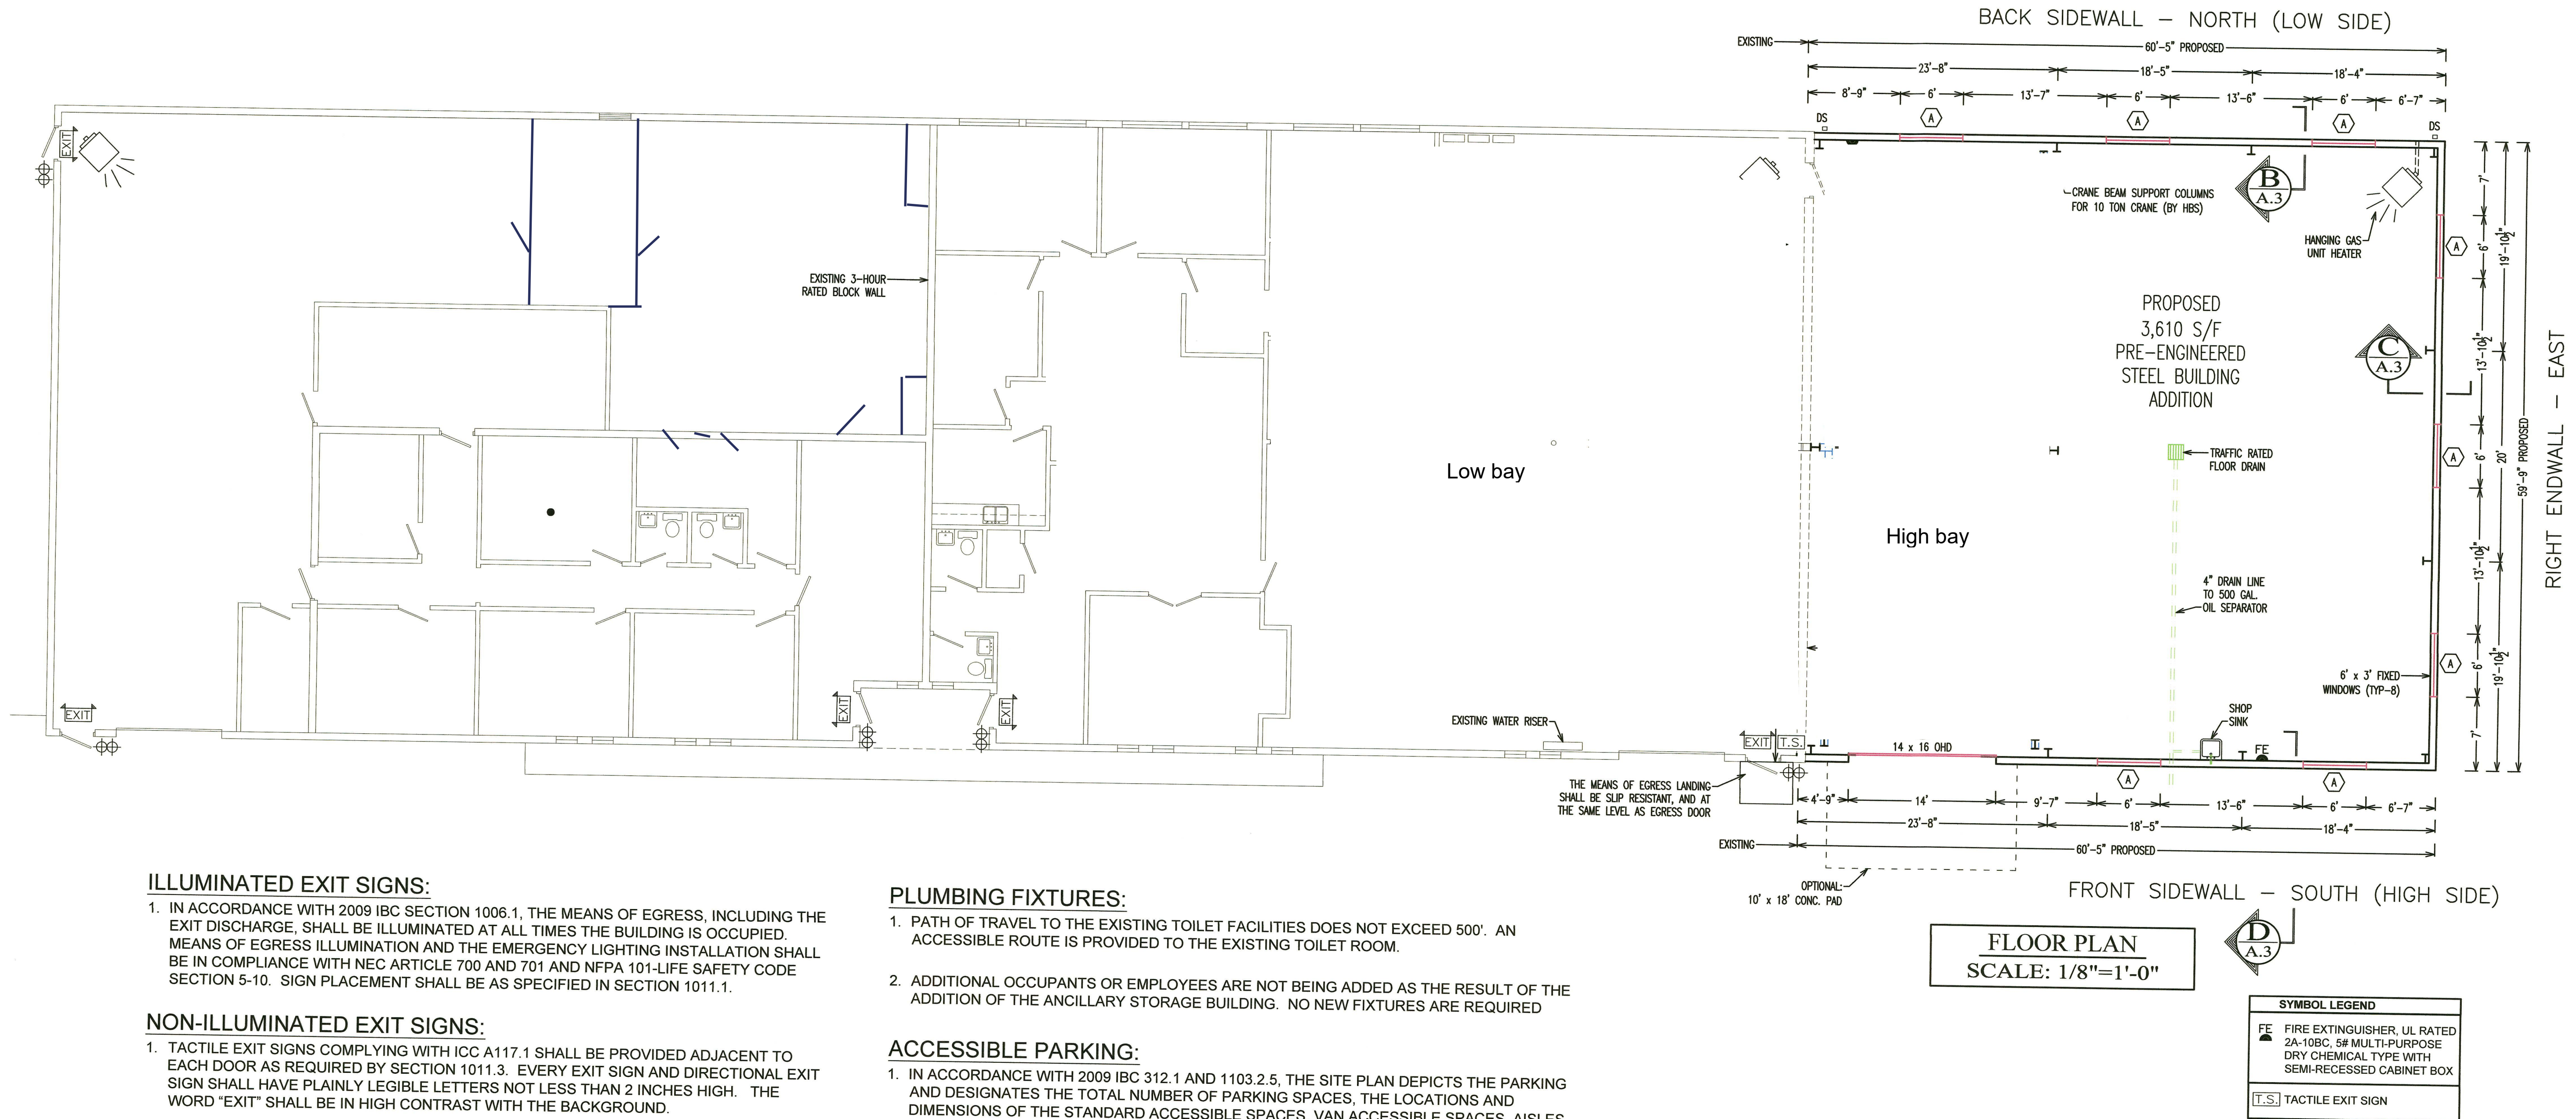

### ILLUMINATED EXIT SIGNS:

1. IN ACCORDANCE WITH 2009 IBC SECTION 1006.1, THE MEANS OF EGRESS, INCLUDING THE EXIT DISCHARGE, SHALL BE ILLUMINATED AT ALL TIMES THE BUILDING IS OCCUPIED. MEANS OF EGRESS ILLUMINATION AND THE EMERGENCY LIGHTING INSTALLATION SHALL BE IN COMPLIANCE WITH NEC ARTICLE 700 AND 701 AND NFPA 101-LIFE SAFETY CODE SECTION 5-10. SIGN PLACEMENT SHALL BE AS SPECIFIED IN SECTION 1011.1.

### NON-ILLUMINATED EXIT SIGNS:

1. TACTILE EXIT SIGNS COMPLYING WITH ICC A117.1 SHALL BE PROVIDED ADJACENT TO EACH DOOR AS REQUIRED BY SECTION 1011.3. EVERY EXIT SIGN AND DIRECTIONAL EXIT SIGN SHALL HAVE PLAINLY LEGIBLE LETTERS NOT LESS THAN 2 INCHES HIGH. THE WORD "EXIT" SHALL BE IN HIGH CONTRAST WITH THE BACKGROUND.

### FIRE EXTINGUISHERS:

1. PORTABLE FIRE EXTINGUISHERS SHALL BE SPACED EVERY 75 FEET, AND AT THE HEIGHT REQUIRED SO THAT THE TOP OF THE FIRE EXTINGUISHER IS NOT MORE THAN 48 INCHES ABOVE THE FLOOR. BOTTOM OF FIRE EXTINGUISHER SHALL BE NO HIGHER THE 27" AFF. FIRE EXTINGUISHERS SHALL BE 5 LB DRY CHEMICAL, WITH MULTI-CLASS RATING A, B, AND C.

ANCILLARY STORAGE:

1. THE METHODS AND AMOUNTS OF STORED FLAMMABLE AND COMBUSTIBLE LIQUIDS IN THE GARAGE DO NOT VIOLATE IBC 1014.2.

PLUMBING FIXTURES:

1. PATH OF TRAVEL TO THE EXISTING TOILET FACILITIES DOES NOT EXCEED 500'. AN ACCESSIBLE ROUTE IS PROVIDED TO THE EXISTING TOILET ROOM.
2. ADDITIONAL OCCUPANTS OR EMPLOYEES ARE NOT BEING ADDED AS THE RESULT OF THE ADDITION OF THE ANCILLARY STORAGE BUILDING. NO NEW FIXTURES ARE REQUIRED

ACCESSIBLE PARKING:

1. IN ACCORDANCE WITH 2009 IBC 312.1 AND 1103.2.5, THE SITE PLAN DEPICTS THE PARKING AND DESIGNATES THE TOTAL NUMBER OF PARKING SPACES, THE LOCATIONS AND DIMENSIONS OF THE STANDARD ACCESSIBLE SPACES, VAN ACCESSIBLE SPACES, AISLES, AND SIGNAGE. EXTERIOR RAMPS SHALL NOT BE REQUIRED. LANDINGS AT THE DOORS SHALL BE CONCRETE SLAB-ON-GRADE LEVEL TO THE INTERIOR FLOOR SLAB AND WITH A LEVEL TRANSITION TO THE ASPHALT EXTERIOR PAVING.
2. EGRESS SHALL BE TO EXTERIOR WALKWAY AND PARKING. THE SLOPE OF A WALKING SURFACE IN THE DIRECTION OF TRAVEL SHALL NOT EXCEED 1 IN 20, AND THE SLOPE PERPENDICULAR TO THE DIRECTION OF TRAVEL SHALL NOT EXCEED 1 IN 48. ANY EXISTING ACCESSIBLE ROUTE FROM THE ACCESSIBLE PARKING TO THE ACCESSIBLE BUILDING ENTRANCE IS INDICATED ON THE SITE PLAN.

## DOOR SCHEDULE

(D1) 14' x 16' WHITE #716 HAAS STEEL INSULATED (R-16.18) OVERHEAD DOOR WITH HIGH LIFT TRACK MOUNTED TO STEEL JAMBS. DOOR TO HAVE J33-11 INDUSTRIAL DUTY JACKSHAFT OPERATOR, STANDARD 3-BUTTON WALL CONTROL & SAFETY EYE SENSOR.  
(TYP-1)

## WINDOW SCHEDULE

(A) 6'-0" x 3'-0" FIXED WHITE VINYL WINDOWS WITH CLEAR THERMOPANE GLASS. (TYP-8)  
6'-0 1/2" x 3'-0 1/2" R.O.

(6) 16' SILL HEIGHT  
(2) 18'-6" SILL HEIGHT