



## PROPERTY INFORMATION

- \* Sales Price **\$974,900.00**
- \* Lot is 1.5 Acres (Divisible)
- \* Proposed Building 8,400/sf
- \* Additional Land Available
- \* Sherburne County PID TBD
- \* Building is 8,400/sf
- \* Zoned: I-4 Industrial
- \* Built: To Be Built
- \* Businesses in the Area Include: The Buff, El Loro, United Bus Sales Options, Inc., Centra Care Dialysis, Americas Best Value Inn







## LOCATION INFORMATION


- \* Located on the South side of Highway 10
- \* 7 Miles from I-94
- \* Near many services and retail
- \* Just Blocks off Highway 10
- \* Highway Visibility
- \* 3/4 Acre Fenced in Outdoor Storage
- \* I-4 Zoning. Gravel Storage Yards Allowed

## **TRAFFIC COUNTS - 2022**

\* 166th Street - 19,698 VPD \* 197th Avenue - 16,799 VPD





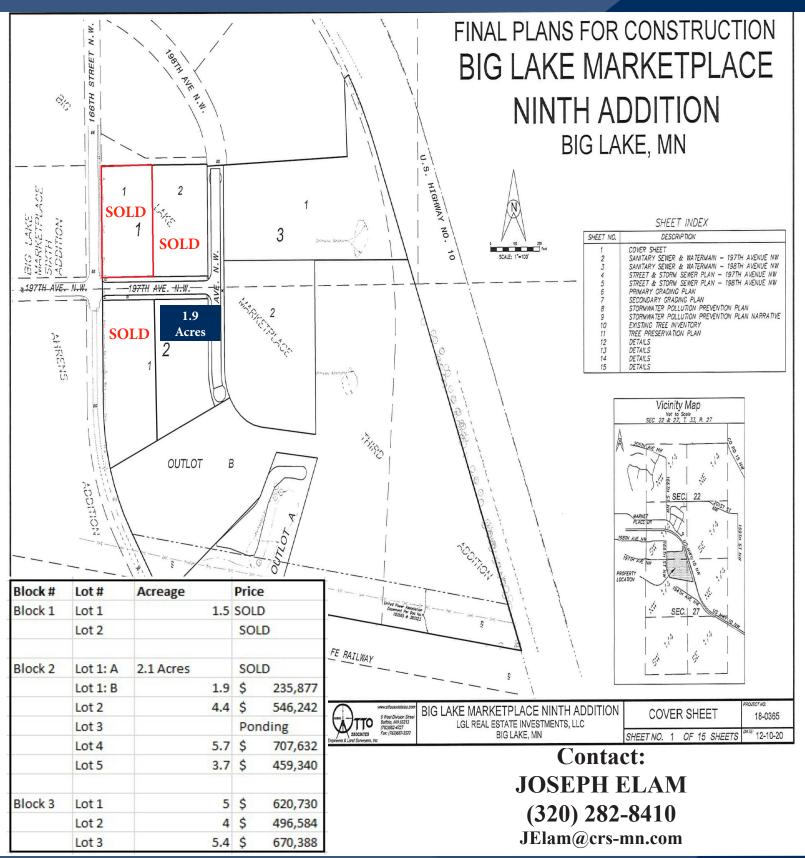






# PROPOSED BUILDING

### PROPERTY INFORMATION

PROPOSED BUILDING

- \* 1,200/sf Office Shell
- \* 7,200/sf Shop/Warehouse
- \* Five (5) Bays with Outdoor Storage
- \* 5 Overhead Doors 12' x 14'
- \* Gas / AC Furnace for Office
- \* Shop (2) 150K Reznor Unit Heaters
- \* 400 Amp 3 Phase Electric
- \* Clear Height 16'
- \*Proposed Structure can be modified to your needs.

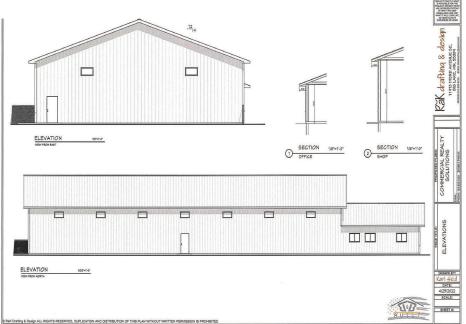

RENDERINGS





#### B & B Built, Inc.

P.O Box 34, Becker, MN 55308 763-325-7363 MN Lic# BC719510

Name : CRS		
Street:		
City:		
County:	State:MN	Zip:
Phone #:	Cell#	
Email:		
Job Site Address: Big L	ake	

Building Size:	60' X 120' X 16' Shop 40' X 30' X10' Office		
Footings:	Pour in place		
Trusses:	35/5/5		
Overhangs:	Side wall 24" End w	12"	
Posts:	SIDES: 4 PLY 2x8 Lam 6	OC END: 5 PLY 2x8 Lam 10' OC	
Steel:	Roof: STD 9"OC	Walls: STD 9"OC	
Wainscot:	36"		
Windows:	9- 48"x24" Thermo-Tech Fixed (Shop) 3- 48"X36" Thermo-Tech sliders (office) 5- 48"X48" Thermo-Tech Sliders (office)		
Service Doors:	3- 3'-0" 7100 Shop 1- 3-0 with glass window (office)		
Overhead Doors:	5- 12'x14' North Central 2" insulated with 2" track With openers (5)		
House wrap:	All walls		
Insulation:	Walls: R25 Fiberglass b	ts Ceiling: R49 Blown	
Interior Liner:	Walls: White Steel (She Sheetrock (Offi		
Concrete Interior:	6" Shop with rebar and perimeter foam 4" office		
Concrete Exterior:	5'X120' front apron 48"X48" Door pads		

#### Concrete:

Number: 1234

Date: 05/20/2022

420' PERIMETER FOAM 16" DOWN 32" OUT

1200 SF OFFICE 4" THICK WITH POLY UNDER SLAB 150 SF APRON FOR OFFICE 30'X5'-4" THICK WITH REBAR AND FIBERS CUT AND SEALED 7200 SF SHOP FLOOR WITH POLY 6" THICK SAW CUT WITH REBAR 700 SF APRON 6" THICK WITH REBAR AND FIBERS CUT AND SEALED Formed trench drain

#### Electrical:

Office/Warehouse Shell Building: Labor and Material to complete project as outlined below.

Electric Permit and Inspections included Service/Distribution:

- 1.] 400 amp 3 phase 120/208 volt CT Cabinet
- 2.] 400 amp service lateral to transformer location 50' allowance
- 3.] 2 200 amp MCB 42 circuit 3 phase panels (located on exterior wall near office area)
- 4.] 1 3" pvc Data/Comm conduit sleeve to property line 50' allowance
- 5.] Transformer Pad by others

#### Office Lighting:

- 1.] 4 8' led strip lights
- 2.] 1 2'x4' led EZ Pan (bathroom)
- 3.] 1 Exit Emergency light w/ remote head
- 4.] 2 Single pole switch

#### Warehouse Lighting:

- 1.] 20 RAB AR Bay lights
- 2.] 3 Exit Emergency light w/ remote head
- 3.] 1 2'x4' led EZ Pan (bathroom)
- 4.] 3 Single pole switch

#### **Exterior Lighting:**

- 1.] 2 W34-150L wall pak lights w/ photo cell
- 2.] 2 W34-69L wall pak lights w/ photo cell
- 3.] 4 6" recess soffit can lights w/ photo cell (office front soffit)

#### Power: Office Area

- 1] 10 Duplex receptacles
- 2.] 1 Gfi receptacle
- 3.] 1 Sign circuit (no hookup)

#### Power: Warehouse

- 1.] 12 Duplex receptacles
- 2.] 3 Gfi receptacles
- 3.] 1 Welder receptacle 50 amp circuit 50' allowance
- 4] 1 Air Compressor 30 amp circuit and hookup 50' allowance 5.] 5 Commercial Door Opener

#### hookups 2 - circuits

Mechanical: Warehouse
1.] 2 - Hanger gas heater hookups

#### Plumbing:

- 2 ADA Bathrooms
- 1 Mop Sink in mech room
- 1 Water heater
- 1 Main water distribution from meter to fixtures
- 2 Outside spigots
- 1 Flammable Waste Trap with 1 drain pipe to poured
- in place concrete trench running full length in front of overhead doors.

Isometric drawings and State of Mn submittals

# Contractor Proposed Building Costs Page 1



Draft stop top of truss to bottom truss every 3000 square feet in shop No sprinkler system figured at this time

#### Heating:

**HVAC** for Office Warehouse

Gas Furnace and AC split system for office

Spiral Duct package from furnace out around office area with duct mounted registers

Central return at mech room wall for future extension

2 Reznor 150k hanging unit heaters for shop area

Gas piping system to all heating equipment

2 Panasonic bath fan and venting

Thermostats for furnace and Unit Heaters

#### Drywall:

Hang, tape and texture drywall in office area

One color of paint in showroom and shop office area White ceilings in offices, breakroom and restrooms

Excavation: (\$100,000.00 Allowance) could change bases on civils

Site work Sewer hook up Water hook up **Erosion control** 

Parking lot: (\$25,000.00 Allowance) could change with actual site plan

Asphalt approximately 8000 square foot No Curb and gutter at this time

#### Other:

Plans: civils, architectural and structural engineering

Permits and WAC/SAC up to \$10000

Fence: 580' of 6' galvanized chain link fence with 20' double swing gate Office is finished shell only, no office walls

Estimate good for 7 days

ESTIMA	ESTIMATE	
	_	
Total Estimate	\$846,450.00	





B & B Built, Inc.

P.O Box 34, Becker, MN 55308 763-325-7363 MN Lic# BC719510

**Contractor Proposed Building Costs** Page 2