MidLakesSurvey.Com
382 LAKE STREET
Antioch, IL 60002

MID LAKES SURVEY COMPANY

Illinois Professional Design Firm 184.006153

ALTA/NSPS LAND TITLE SURVEY

Phone: 847-973-1873
Fax: 847-973-9783
midlakes.survey@yahoo.com

LOT 1, LOT 2 AND THE WEST 1/2 OF THE VACATED ALLEY LYING EAST OF AND ADJOINING SAID LOT 2, IN TRINITY LUTHERAN CHURCH RESUBDIVISION, BEING A RESUBDIVISION OF LOTS 4, 5 AND 6 IN BLOCK 1 OF ROLLES SOUTH ADDITION TO THE VILLAGE OF TURNER, IN THE NORTHEAST QUARTER OF SECTION 9, TOWNSHIP 39 NORTH, RANGE 9, EAST OF THE THIRD PRINCIPAL MERIDIAN, ACCORDING TO THE PLAT OF SAID RESUBDIVISION RECORDED OCTOBER 5, 1989, AS DOCUMENT R89-113848, IN DUPAGE COUNTY, ILLINOIS.

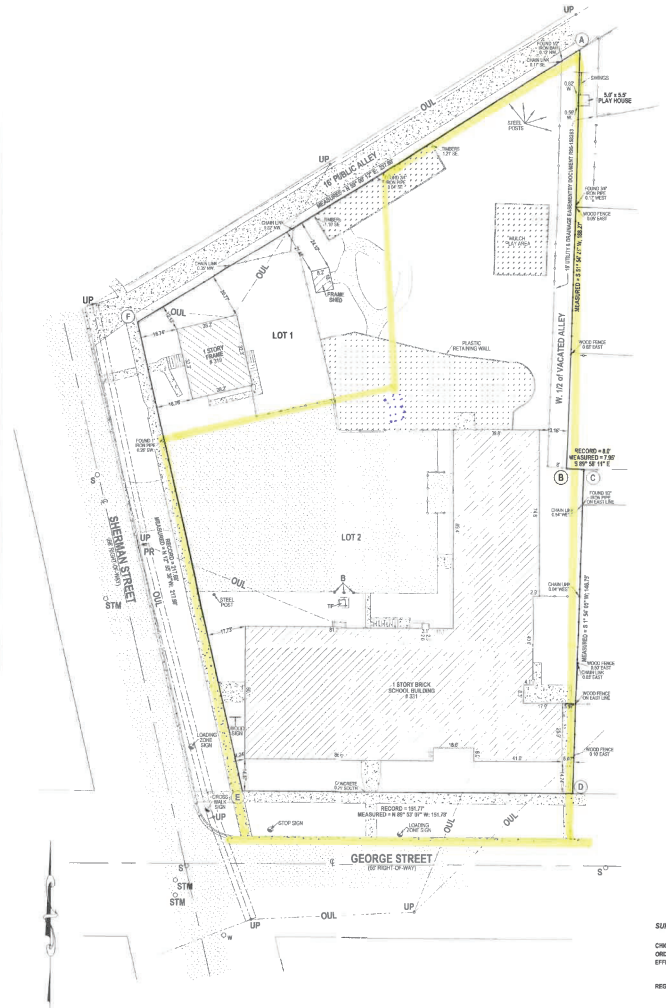
16' PUBLIC ALLEY
LOT 1
LOT 2
W. 1/2 of VACATED ALLEY
1 STORY FRAME
FRAME SHED
PLASTIC RETAINING WALL
1 STORY BRICK SCHOOL BUILDING
SHERMAN STREET
GEORGE STREET
(50' RIGHT-OF-WAY)
5.0' x 5.5' PLAY HOUSE
RECORD = 8.0'
MEASURED = 7.90'
S 00° 58' 11" E
MEASURED = N 00° 57' 37" W: 151.28'
RECORD = 150.27'
MEASURED = N 00° 57' 37" W: 151.28'
STOP SIGN
CONCRETE CURB & GUTTER
WOOD FENCE 0.60' EAST
WOOD FENCE ON EAST LINE
WOOD FENCE 0.10' EAST
CHAIN LINK 0.04' WEST
CHAIN LINK 0.04' NORTH
CHAIN LINK 0.02' NORTH
CHAIN LINK 0.02' WEST
CHAIN LINK 0.02' EAST
CHAIN LINK 0.10' WEST
CHAIN LINK 0.10' NORTH
CHAIN LINK 0.10' EAST
WOOD FENCE 0.10' EAST
WOOD FENCE 0.10' WEST
WOOD FENCE 0.60' EAST
WOOD FENCE 0.10' EAST
FOUND 1/2" IRON PIPE 0.20' EAST
FOUND 1" IRON PIPE 0.20' SOUTH
FOUND 1" IRON PIPE 0.20' SOUTH
FOUND 1/2" IRON PIPE 0.10' EAST
FOUND 1/2" IRON PIPE 0.10' WEST
FOUND 1/2" IRON PIPE ON EAST LINE
FOUND 1/2" IRON PIPE 0.20' EAST
FOUND 1/2" IRON PIPE 0.20' EAST
FOUND 1" IRON PIPE 0.20' SOUTH
FOUND 1" IRON PIPE 0.20' SOUTH
FOUND 1" IRON PIPE 0.20' SOUTH